INCH-POUND

MIL-HDBK-801(SH)
31 October 1990

SUPERSEDING
NAVSEA 0941-LP-047-3010

MILITARY HANDBOOK

LIST OF PRESSURE GAUGES

AMSC/NA

FSC 6685

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY

NAVAL SEA SYSTEMS COMMAND
Washington, DC 20362-5101

List of Pressure Gauges

1. This Military Handbook is approved for use by the Naval Sea Systems Command, Department of Navy, and is available for use by all departments and agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 55Z3, Department of the Navy, Washington, DC 20362-5101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph		Page
1.	SCOPE	1
1.1	Scope	1
1.1.1	Limitations	1
1.2	Application	1
2.	APPLICABLE DOCUMENTS	1
2.1	Government documents	1
2.1.1	Specifications, standards, and handbooks	1
2.1.2	Other Government drawings and publications	1
3.	DEFINITIONS (not applicable)	2
4.	GENERAL REQUIREMENTS	2
4.1	Arrangement	2
4.1.1	Gauge information	2
5.	DETAILED REQUIREMENTS	2
5.1	Classification	2
5.1.1	Design	3
5.1.2	Type of pressure	3
5.1.3	Dial size and case design	3
5.1.4	Elastic element	4
5.1.5	Dial range and color	4
5.1.6	Pressure connection and connection location	4
5.1.7	Liquid fill case fluid and vibration category	5
5.1.8	Cleanliness	5
5.2	Gauge listing	5
6.	NOTES	6
6.1	Intended use	6
6.2	Flush mounting rings	6
6.3	Safety case	6
6.4	Installation	6
6.5	Selecting a pressure gauge	6
6.6	Acquisition requirements	6
6.7	Subject term (key word) listing.	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Contents of gauge listing

	Page
Gauge index	7
Gauge simplex gauge pressure	13
Gauge simplex pressure, HEMPI	20
Gauge simplex vacuum	22
Gauge simplex compound	24
Gauge simplex compound, HEMPI	27
Gauge simplex retarded compound	29
Gauge simplex caisson gauge pressure	31
Gauge simplex – refrigerant compound	33
Gauge duplex gauge pressure	35

Figures

		Page
1.	Simplex gauge pressure	12
2.	Simplex gauge pressure helical-wound edgeview mechanical pressure indicator (HEMPI)	19
3.	Simplex vacuum	21
4.	Simplex compound	23
5.	Simplex compound helical-wound edgeview mechanical pressure indicator (HEMPI)	26
6.	Simplex retarded, compound	28
7.	Simplex – Caisson gauge pressure	30
8.	Simplex – Refrigerant compound	32
9.	Duplex gauge pressure	34
10.	Gauge mounting dimensions 3 1/2, 4 1/2, and 8 1/2 inches dial diameters	36
11.	Gauge connection locations	37

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

FOREWORD

1. This handbook is prepared to provide a list of pressure gauges covered by military specifications and used aboard ships. The prime reference number used for all items is the National Stock Number (NSN).

2. This handbook supersedes publication NAVSEA 0941-LP-047-3010.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

HANDBOOK OF PRESSURE GAUGES APPLICABLE TO PROPULSION MACHINERY

1. SCOPE

1.1 **Scope.** This handbook covers environmentally hardened pressure gauges. Identity is established by the National Stock Number cross-referenced to the mil-spec classification.

1.1.1 Limitations. This handbook covers only gauges which are procured and tested to the requirements of MIL-G-18997. Gauges procured to Federal or commercial specifications are not included.

1.2 **Application.** This handbook is applicable for new construction, overhaul, ship alteration (SHIPALT), conversion, and repair.

2. APPLICABLE DOCUMENTS

2.1 **Government documents.**

2.1.1 **Specifications, standards, and handbooks.** The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-G-18997	Gauge, Pressure, Dial Indicating

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5094.)

2.1.2 Other Government drawings. The following Government drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Publications are normally available from (Non-Government standards and other

DRAWING

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

NAVSHIPS 58700-841569	Ring, Steel, Flush Mount Gauge, Thermometer
NAVSHIPS 803-1385850	Piping, Instrument, Pressure for all Service

(Copies of drawing should be obtained from the contracting activity or as directed by the contractor.)

3. DEFINITIONS

This section is not applicable to this handbook.

4. GENERAL REQUIREMENTS

4.1 Arrangement. This handbook is broken down by the pressure gauge design as follows:

Simplex, gauge pressure
Simplex, gauge pressure, helical-wound edgeview mechanical pressure indicators (HEMPI)
Simplex, vacuum
Simplex, compound
Simplex, compound, helical-wound edgeview mechanical pressure indicators (HEMPI)
Simplex, retarded, compound
Simplex – caisson, gauge pressure
Simplex – refrigerant, compound
Duplex, gauge pressure


4.1.1 Gauge information. The information provided for each gauge is the following:

Range (pressure and/or vacuum)
Depth (caisson gauges only)
Connection location
Connection type
Dial color
Cleaning
Dial diameter
National stock number
Gauge illustrations

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

5. DETAIL REQUIREMENTS

5.1 Classification. Pressure gauges are classified in accordance with the classification system specified in MIL-G-18997.

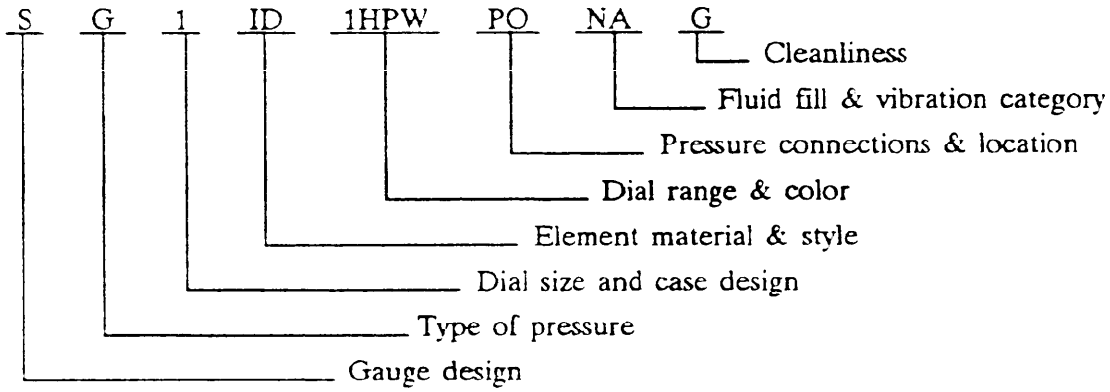

5.1.1 **Design.** Pressure gauge design is designated by one of the following symbols:

Pressure gauge design	Symbol
Simplex	S
Simplex – special applications	
Caisson	K
Cruising range	C
Oxygen	X
Refrigerant	R
Duplex	D

5.1.2 **Type of pressure.** Type of pressure that the pressure gauge shall indicate is designated by one of the following symbols:

Type of pressure	Symbol
Gauge pressure	G
Vacuum	V
Compound	C
Suppressed, gauge pressure	S
Retarded, gauge pressure	R
Retarded, compound pressure	T

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

5.1.3 Dial size and case design. The dial size and case design is designated by one of the following symbols:

Dial size	Case design	Symbol
2	Stem mounted	1
2-1/2	Stem mounted	2
3-1/2	Flush/surface mounted	3
4-1/2	Flush/surface mounted	4
8-1/2	Flush/surface mounted	8

5.1.4 Elastic element. The elastic element is designated by two symbols as provided below. The first symbol is the elastic element material. The second symbol is the elastic element style.

Elastic element material	Symbol
K-monel	M
Inconel	I

Elastic element style	Symbol
C-type bourdon tube (gear drive)	C
Helical (also helical-spiral) bourdon tube (gear drive)	H
Helical (also helical-spiral) bourdon tube (direct drive)	D

5.1.5 Dial range and color. The range and color of the pressure gauge dial is designated by a sequence of symbols for the range followed by a single symbol for the color of the dial. The sequence of symbols for the range is selected from the appropriate table in MIL-G-18997. The single symbol for the color of the dial shall be designated by one of the following symbols:

Dial color	Symbol
White background dial with black graduations and markings	W
Special	S

5.1.6 Pressure connection and connection location. The type of pressure connection and its location for connection is designated by two symbols as provided below. The first symbol is the type of connection fitting. The second symbol is the location of the pressure connection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Pressure connection	Symbol
O-ring union	R
1/4 NPT (male)	P
Welded nipple	W
Brazed nipple	B
Threaded vent (caisson only)	K

Connection location	Symbol
Back	A
Bottom	O
5 o'clock	C

5.1.7 Liquid fill case fluid and vibration category. The option for the pressure gauge case containing a liquid fill and the vibration category is designated by the two symbols as provided below. The first symbol designates whether a fill fluid is required. The second symbol designates the vibration category (see MIL-G-18997).

Liquid fill	Symbol
None	N
Silicone	S

Vibration category	Symbol
Category A	A
Category B	B
Category C	C

5.1.8 Cleanliness. The cleanliness is designated by the symbols as specified below. The symbol designates the method of cleaning the pressure element assembly.

Cleanliness	Symbol
General applications	G
Oxygen applications	X

5.2 Gauge listing. See pages 7 through 36.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

have a circular or cross pattern placed so that it will produce an image

6. NOTES

6.1 Intended use. This handbook is intended to provide a list of environmentally hardened pressure gauges available in the supply system. It is not an exhaustive list of what can be procured.

6.2 Flush mounting rings. Flush mounting rings for panel mounted gauges are not supplied with the stocked gauge. When these mounting rings are required for flush mounting of shipboard gauges, they shall be in accordance with NAVSHIPS Drawing 5000-S8700-841569.

6.3 Safety case. All pressure gauges are supplied with a safety case.

6.4 Installation. Pressure gauges are installed in accordance with the requirements of NAVSEA Drawing 803-1385850.

6.5 Selecting a pressure gauge. The size of a gauge is designated by the normal diameter of the dial. 2, 2-1/2, 3-1/2, 4-1/2, and 8-1/2 inch dial sizes are considered standard for Navy use. When selecting a gauge for new installations, choose a gage having a maximum scale reading which is approximately 40 percent above the anticipated working pressure for the application. This will ensure a more accurate reading and provide for an adequate safety factor against overpressure.

When selecting a substitute gauge, choose a gauge with the next largest pressure range, but do not exceed the operating pressure range for the application by more than 50 percent.

> **Example:** If a gauge with a range of 0-100 psi is required for the application, do not substitute a gauge with a range exceeding 0-150 psi.

6.6 Acquisition requirements. Acquisition of pressure gauges should be in accordance with MIL-G-18997.

6.7 Subject term (key word) listing.

Bourdon
Dial
Direct drive
Duplex
Pressure range
Simplex

Preparing Activity
NAVY – SH
(Project 6685-N819)

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

Gauge

Index

National stock number (and classification) to item number.

National stock number	Classification	Item number
6685-00-016-1877	SG8 6HPSPANAG	450
6685-00-016-1886	SG4 15HPSPANAG	549
6685-00-016-2266	SG3MC5KPWPONAX	683
6685-00-016-2342	SG4 1HPSPANAG	204
6685-00-056-0839	SC3 C2HCWPANAG	877
6685-00-067-8881	SC4 3KPSPONAG	634
6685-00-073-6733	SG3M 3KPWWANAX	618
6685-00-073-9885	SG4 2HPWPANAG	279
6685-00-073-9886	SG4 1HPWPANAG	154
6685-00-078-3141	SG8M 15HPWRANAG	565
6685-00-078-3144	SG4MC1KPWWAX	494
6685-00-079-1414	SG4 3HPWPONCG	309
5685-00-079-1415	SG4 1KPWPONCG	499
6685-00-079-9588	SC4MD150CWRANAG	858
6685-00-080-2100	SG2 4HPWPONCG	352
6685-00-086-9306	SG3M 60PSRANAG	113
6685-00-086-9323	DG4MD3HPWRANAG	965
6685-00-097-8596	SG2 30PSPONCG	17
6685-00-123-1922	SG4 5KPWPONAG	724
6685-00-123-1923	SG4 8KPWPONAG	759
6685-00-123-1926	SC3MD1HCWRANAG	841
6685-00-127-6198	SC4MC15CWPANAG	794
6685-00-127-6200	SG3 2HPWPANAG	228
6685-00-127-6201	SG3 2KPWPANAG	588
6685-00-128-1861	SG8M 8HPWRANAG	465
6685-00-132-1175	RC3MD1HC4WRANAG	940
6685-00-132-5176	SG8MC3HPWRANAG	305
6685-00-135-0669	SG4M 8HPWRONAG	454
6685-00-135-0672	SG4 1HPWPANAG	159
6685-00-135-0673	SG3MC1HPSRONAG	178
6685-00-135-0674	DG4M 8HPWRONAG	971
6685-00-168-0386	SG4 30PWPANAG	34
6685-00-176-5883	SG4 5KPWCANAG	729
6685-00-198-9473	SG3MD5KPWRONAG	688
6685-00-228-9362	SG8 4HPWPANAG	380
6685-00-244-1830	SG2 1HPWPONCG	147
6685-00-246-2357	SG2 4HPWPONCG	357
6685-00-246-2360	DG4 1HPWPONAG	953
6685-00-246-2363	SG2 15PWPONCG	2
6685-00-246-2364	SG2 30PWPONCG	22
6685-00-246-2365	SG2 60PWONCG	92
6685-00-248-1659	SG4 C6HPWPANAG	414
6685-00-248-1691	SG8 3KPWPANAG	615
6685-00-248-1693	SG8 D5KPWPANAG	680
6685-00-248-6990	SG3 6HPWPONAG	408
6685-00-251-1356	SG3 C1KPSPANAG	478
6685-00-252-0555	DG4 C1KPWPONAG	977
6685-00-252-0707	SG2 30PWPANCG	27
6685-00-252-3017	SC4 C3HCWPONAG	902
6685-00-252-3037	SG4 3KPWPONAG	629
6685-00-257-4088	SG3 2HPSPANAG	253
6685-00-264-3968	SC3 1HPWPANAG	158
6685-00-264-3972	SG3 2HPWPANAG	258
6685-00-264-3986	SC3 C2HCWPANAG	881
6685-00-291-1151	SC4 C30CWPANAG	822
6685-00-306-4873	SC3 6HPSPANAG	393
6685-00-325-0426	SG4 5KPSPANAX	734
6685-00-405-4991	SG2 3HPWPO CG	307
6685-00-436-6974	SG2 3HPWP CG	312
6685-00-469-8886	SG4MC6HPWWONAX	419
6685-00-469-8887	SG4MC15HPWWONAG	544
6685-00-469-8888	SG4 30PSPANAG	39
6685-00-469-8893	SG4 3KPSPANAG	669
6685-00-514-4072	SG2 1HPWPANCG	612
6685-00-515-5109	SG3 C2KPSPANAG	578
6685-00-526-4267	SG3 30PWPANAG	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Gauge

Index

National stock number (and classification) to item number – Continued.

National stock number	Classification	Item number
6685-00-526-6539	SG2 1HPWPANCG	152
6685-00-526-8702	DG4 2HPSPANAG	959
6685-00-527-6213	SG2 3HPWP CG	302
6685-00-527-6214	SG2 2HPWPONCG	222
6685-00-527-6217	SG2 2HPWPANCG	227
6685-00-527-6299	SG4 C4HCSPANAG	906
6685-00-527-6310	SG4 1KPSPANAG	14
6685-00-527-6323	SG2 1KPSPONCG	472
6685-00-527-6362	SG3 C3HCSPANAG	889
6685-00-527-7439	SG3 1KPSPANAG	498
6685-00-530-0357	DG4 30PSPANAG	944
6685-00-530-0363	SG2 60PWPONCG	97
6685-00-530-4021	SG2 60PWPANCG	102
6685-00-530-4331	SG3 2KPWPONAG	593
6685-00-531-4927	SG4 30PWPANAG	74
6685-00-542-1136	DG4 2HPWPANAG	962
6685-00-542-1139	SG8 15HPWPANAG	570
6685-00-542-1140	SG4MC5KPWPANAG	679
6685-00-542-1671	SG4 2HPWPANAG	284
6685-00-551-8602	SG1 1HPWPONCG	146
6685-00-551-9030	SG3 4HPSPANAG	368
6685-00-555-4197	SG3 1HPWPANAG	163
6685-00-555-4198	SG3 C3HPWPANAG	303
6685-00-580-9733	SG2 1HPWPO CG	172
6685-00-585-0834	SG4 60PWPANAG	139
6685-00-585-1236	SG8 15HPWPANAG	575
6685-00-585-4429	DG4 C4HPWPANAG	968
6685-00-585-9752	SG4 6HPWPANAG	444
6685-00-585-9756	SG4 5KPWPANAG	739
6685-00-591-1952	SG3MD2HPWCONAG	233
6685-00-618-6613	SG2 60PWPO CG	107
6685-00-725-1307	SV8 CVWCANAG	788
6685-00-725-1309	SG4 1HPWCANAG	184
6685-00-725-1313	SG4 2HPWPANAG	264
6685-00-725-1322	SG4 30PWCANAG	49
6685-00-725-1323	SG4 30PWCANAG	54
6685-00-725-1332	SG8 3HPWCANAG	340
6685-00-725-1346	SG4 C150CWCANAG	854
6685-00-726-4226	SG3 C1HPWPANCG	153
6685-00-727-0522	SG4MC60PWPANAG	104
6685-00-727-4766	SG4 2HPWPANAG	289
6685-00-728-1018	SG3 6HPWCANAG	398
6685-00-739-2792	SG4 1KPWPANAG	529
6685-00-747-9268	SG2 1HPWPANCG	157
6685-00-760-6692	SG4MC8HPWPONAX	459
6685-00-803-8628	SG4 2KPWPANAG	589
6685-00-806-7633	SG8 1KPWPANAG	505
6685-00-807-5863	SG4 1KPWPONAG	534
6685-00-807-5864	SG4 15HPWPANAG	554
6685-00-807-5865	SG4 15HPWPONAG	559
6685-00-807-5867	SG8 3HPWPANAG	315
6685-00-807-5870	SG8 6HPWPANAG	415
6685-00-807-5872	SG8 8HPWPANAG	470
6685-00-807-5875	SG8 1KPWPONAG	500
6685-00-807-5876	SG8 C15HPWPANAG	555
6685-00-807-5879	SG8 C2KPWPONAG	595
6685-00-807-9653	SG4 C6HPWPANAG	424
6685-00-819-8824	SG2 5KPWPANCG	677
6685-00-835-0776	SG3 30PWPANAG	33
6685-00-836-2679	SG4 5KPWPANAG	744
6685-00-836-8987	RCRM 15CSRANAG	938
6685-00-838-0552	SG2 C30PWPANCG	32
6685-00-841-1425	SC4MD15CSRANAG	798
6685-00-849-5307	SG4 2HPWCANAG	249
6685-00-857-4277	SG3MD3HPWRANAG	313
6685-00-872-4742	SG4 60PSPANAG	114

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

cies and their corresponding breakdown scales. Moving of horizontal cri

National stock number	Classification	Item number
6685-00-872-4743	SG4MD60PWRANAG	129
6685-00-872-4745	SG4 D2HPWPANAG	229
6685-00-872-4729	SG4MD1KPWRANAG	504
6685-00-878-0702	SG4 30PWPANAG	79
6685-00-881-0735	SG4 10KPSPANAX	769
6685-00-881-0736	SG4 3HPSPANAX	349
6685-00-881-0742	SG4MC1KPSWANAX	509
6685-00-881-0762	SG4 2HPSPANAX	269
6685-00-881-0763	SG4 C3KPSWANAX	619
6685-00-881-0775	SG4 60PSPANAX	134
6685-00-905-6842	SG4 D1HPSPANAG	209
6685-00-905-6843	SG3 C1HPSPANAG	323
6685-00-906-3958	SC4MD15CWRANAG	802
6685-00-906-4003	SC4MD1HCWRONAG	850
6685-00-906-4006	SV4MDVWRANAG	784
6685-00-910-6949	SG2 1HPWPANCG	162
6685-00-920-2292	SG4 30PWPANAG	89
6685-00-922-2837	SG4 30PWPANAG	84
6685-00-925-1978	SG3 15PWPANAG	8
6685-00-934-8669	SG4 8HPWPANAG	464
6685-00-958-7378	SG3 60PWCANAG	123
6685-00-965-5195	SC4 C30CWPANCG	826
6685-00-965-5435	SG4 2HPWPONCG	224
6685-00-965-5438	SG4 5KPWPONCG	689
6685-00-974-6509	SC4 D60CWRANAG	838
6685-00-974-6516	DG4MD60PWRONAG	947
6685-00-995-3639	SG2 30PSPANCG	37
6685-01-013-2806	SG4 30PWPANAG	29
6685-01-013-2808	SG4 3HPWPANAG	304
6685-01-014-9285	SG4 15PWPANAG	9
6685-01-015-4644	SG4 6HPWPANAG	429
6685-01-046-6741	SC3MC30CWCANAG	813
6685-01-046-6742	SC3MC30CWCONAG	817
6685-01-046-6743	SC3MC1HCWCANAG	845
6685-01-046-6744	SC3MC15CWCANAG	853
6685-01-046-6746	SC3M 3HCWCANAG	893
6685-01-046-6747	SC3 3HCWCONAG	897
6685-01-046-6748	SC3MC6HCWCONAG	909
6685-01-046-6749	SC4MC30CWCANAG	814
6685-01-046-6750	SC4MC30CWCONAG	818
6685-01-046-6753	SG4M 5KPWCONAG	699
6685-01-046-6754	SG4MC5KPWCONAG	709
6685-01-046-6755	SG4MC5KPWCANAG	694
6685-01-046-6756	SG4MC5KPSCANAG	714
6685-01-046-6757	SG4MC8KPWCANAG	749
6685-01-046-6760	SG4MC8KPWCONAG	754
6685-01-046-6764	SG8MC2HPWCANAG	240
6685-01-046-6766	SG8MC1KPWCONAG	485
6685-01-046-6768	SG8MC1KPWCANAG	520
6685-01-047-5081	SC4MC150CWCANAG	862
6685-01-047-5082	SC4MC150CSCANAG	866
6685-01-047-5083	SC4MC3HCWCANAG	886
6685-01-047-5084	SC4MC3HCWCONAG	898
6685-01-047-5085	SC4MC6HCWCANAG	914
6685-01-047-5086	SC4MC1KCWCANAG	918
6685-01-047-5088	SC4MC30CWCANAG	830
6685-01-047-5089	SC4MC3HCWCANAG	894
6685-01-047-5091	SC4 30CWCANAG	834
6685-01-047-5094	SG3M 60PWCANAG	118
6685-01-047-5095	SG3MC30PWCONAG	43
6685-01-047-5097	SG3MC30PWCANAG	48
6685-01-047-5099	SG3MC1HPWCANAG	183
6685-01-047-5100	SG3MC1HPSCANAG	188
6685-01-047-5102	SG3MC4HPWCANAG	363
6685-01-047-5104	SG3MC5KPWCANAG	693
6685-01-047-5106	SG3MC3KPWCANAG	623

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

National stock number	Classification	Item number
6685-01-047-5108	SG3MC2KPWCONAG	583
6685-01-047-5113	SG3MC10KPWCANAG	763
6685-01-047-5117	SG4MC2HPWCANAG	239
6685-01-047-5120	SG4MC2KPWCONAG	584
6685-01-047-5121	SG4MC2KPWCANAG	599
6685-01-047-5122	SG4 2KPSCANAG	604
6685-01-047-5124	SG4MC3KPSCANAG	639
6685-01-047-5125	SG4MC3KPWCANAG	624
6685-01-047-5127	SG4MC5KPWCANAG	704
6685-01-047-5128	SG4M 3KPWCONAG	644
6685-01-047-5130	DG4MC1HPWCONAG	950
6685-01-047-5136	DG4MC8HPWCANAG	974
6685-01-047-5138	SV4MCVWCANAG	787
6685-01-047-5140	SV8MCVWCANAG	791
6685-01-049-6057	SG3M 6HPWRONAG	383
6685-01-049-8050	ST4MCP2WCONAG	923
6685-01-049-8057	SG3 6HPWCONAG	403
6685-01-049-8060	SG3MC2HPWCANAG	238
6685-01-049-8061	SG3MC2HPSCANAG	243
6685-01-049-8065	SG4MC30PSCANAG	69
6685-01-049-8067	SG3MC8KPWCANAG	748
6685-01-049-8069	SG3M 5KPWCANAG	703
6685-01-049-8070	SG4MC1HPSCONAG	194
6685-01-049-8072	SG4MC3HPWCONAG	329
6685-01-049-8074	SV8MCVWCONAG	782
6685-01-049-8076	SV3MCVWCONAG	780
6685-01-050-1831	SG3MC1KPWCONAG	483
6685-01-054-3731	SG3MC6HPWCANAG	388
6685-01-054-3732	SG3MC2HPWCANAG	248
6685-01-054-3733	SG3MC30PWCANAG	53
6685-01-057-9160	SG4MC1KPWCONAG	484
6685-01-057-9161	SG4MC1KPSCANAG	514
6685-01-057-9162	SG4MC1KPWCANAG	519
6685-01-057-9163	SG4MC1KPSCANAG	524
6685-01-057-9165	SG4MC3HPSCANAG	334
6685-01-059-6267	SG4MC60PWCANAG	119
6685-01-062-4650	SG4MC3HPWCANAG	339
6685-01-063-7425	SG4M 30PWRANAG	59
6685-01-067-3743	SG4MC2KPWCANAG	609
6685-01-074-2533	SG4M 30PWRONAG	64
6685-01-074-2535	SG4M 3HPSRANAG	344
6685-01-074-2536	SG4MC3KPWCANAG	649
6685-01-076-1746	SG4M 6HPWRANAG	434
6685-01-087-7347	KG4MC3HKWKCNAG	930
6685-01-104-2427	SG2 3HPWPO CG	317
6685-01-119-7056	SG4 C2HPWPANAG	259
6685-01-122-5983	KG4MC3HKWKCNAG	933
6685-01-122-7465	SC4 150CWPANAG	874
6685-01-169-4345	SG4 3KPWCANAG	674
6685-01-225-0369	SG4 WPANAG	569
6685-01-240-1426	SG4 2HPWRANAG	294
6685-01-240-1432	ST4 R3WRANAG	927
6685-01-240-1433	SC4 15CWRANAG	806
6685-01-240-1434	SG4 2HPWRANAG	274
6685-01-240-1435	SG4 5KPWRANAG	719
6685-01-240-1436	SG4 6HPWRANAG	439
6685-01-240-1437	SG4 3KPWRANAG	654
6685-01-240-1438	SC4 15CWRANAG	810
6685-01-240-3742	SG3 30PWRONAG	63
6685-01-240-3745	SG4 3KPWRANAG	659
6685-01-240-3746	SG4 3KPWRONAG	664
6685-01-240-3747	SG4 4HPWRONAG	374
6685-01-240-3748	SG4 1HPWRONAG	199

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T13:51Z
Check the source to verify that this is the current version before use.

National stock number	Classification	Item number
6685-01-240-3749	SC4 150CWRONAG	870
6685-01-240-3750	DG4 2HPWRONAG	956
6685-01-240-3751	SG3 30PWRANAG	58
6685-01-245-5222	SG4 1KPWRANAG	539
6685-01-245-5223	SG4 1HPWRANAG	214
6685-01-245-5224	SG4 2HPWRANAG	299
6685-01-245-5225	SG4 1HPWRONAG	219
6685-01-245-5227	SG4 60PWRANAG	144
6685-01-267-6443	SFHHD6HPGHANBG	920
6685-01-273-6071	SGHHD1HPGHANBG	771
6685-01-267-6444	SGHHD1KPGHANBG	775
6685-01-267-6445	SGHHD15HPGHANBG	776
6685-01-267-6446	SGHHD3KPGHANBG	777
6685-01-267-6447	SGHHD5KPGHANBG	778
6685-01-267-6448	SGHHD8KPGHANBG	779
6685-01-273-6070	SGHHD60PGHANBG	771
6685-01-273-6071	SGHHD1HPGHANBG	772
6685-01-273-6072	SGHHD3HPGHANBG	773
6685-01-273-6073	SGHHD6HPGHANBG	774
6685-01-274-7780	SG2 1HPWPO CG	167

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

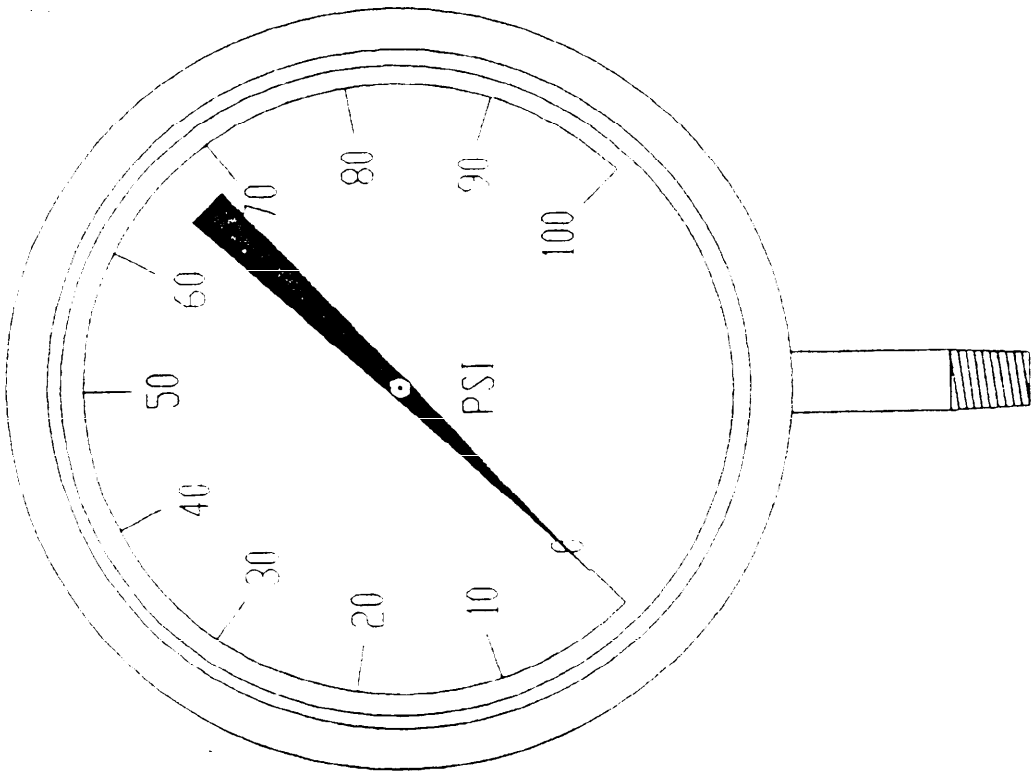


FIGURE 1. *Simplex gauge pressure.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Gauge pressure

2", 2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters

Range press. (psi)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers									
	Location	Type			Item No.	2" Dial	Item No.	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
0- 15	Bottom	1/4" NPT	White	General	1		2	6685-00-246-2363	3		4		5	
0- 15	Back	1/4" NPT	White	General	6		7		8	6685-00-925-1978	9	6685-01-014-9285	10	
0- 15	Back	1/4" NPT	Black	General	11		12		13		14	6685-00-527-6310	15	
0- 30	Bottom	1/4" NPT	Black	General	16		17	6685-00-097-8596	18		19		20	
0- 30	Bottom	1/4" NPT	White	General	21		22	6685-00-246-2364	23		24		25	
0- 30	Back	1/4" NPT	White	General	26		27	6685-00-252-0707	28	6685-00-526-4267	29	6685-01-013-2806	30	
0- 30	Back	1/4" NPT	White	General	31		32	6685-00-838-0552	33	6685-00-835-0776	34	6685-00-168-0386	35	
0- 30	Back	1/4" NPT	Black	General	36		37	6685-00-995-3639	38		39	6685-00-469-8888	40	
0- 30	Bottom	7/16"-20	White	General	41		42		43	6685-01-047-5095	44		45	
0- 30	Back	7/16"-20	White	General	46		47		48	6685-01-047-5097	49	6685-00-725-1322	50	
0- 30	Back	7/16"-20	White	General	51		52		53	6685-01-054-3733	54	6685-00-725-1323	55	
0- 30	Back	O-Ring	White	General	56		57		58	6685-01-240-3751	59	6685-01-063-7425	60	
0- 30	Bottom	O-Ring	White	General	61		62		63	6685-01-240-3742	64	6685-01-074-2533	65	
0- 30	Back	7/16"-20	Black	General	66		67		68		69	6685-01-049-8065	70	
0- 30	Back	1/4" NPT	White	General	71		72		73		74	6685-00-531-4927	75	
0- 30	Back	1/4" NPT	White	General	76		77		78		79	6685-00-878-0702	80	
0- 30	Back	1/4" NPT	White	General	81		82		83		84	6685-00-922-2837	85	
0- 30	Back	1/4" NPT	White	General	86		87		88		89	6685-00-920-2292	90	
0- 60	Bottom	1/4" NPT	White	General	91		92	6685-00-246-2365	93		94		95	
0- 60	Bottom	1/4" NPT	White	General	96		97	6685-00-530-0363	98		99		100	
0- 60	Back	1/4" NPT	White	General	101		102	6685-00-530-4021	103		104	6685-00-727-0522	105	
0- 60	Bottom	1/4" NPT	White	General	106		107	6685-00-618-6613	108		109		110	
0- 60	Back	O-ring	Black	General	111		112		113	6685-00-086-9306	114	6685-00-872-4742	115	
0- 60	Back	7/16"-20	White	General	116		117		118	6685-01-047-5094	119	6685-01-059-6267	120	
0- 60	Back	7/16"-20	White	General	121		122		123	6685-00-958-7378	124		125	
0- 60	Back	1/4" NPT	White	General	126		127		128		129	6685-00-872-4743	130	
0- 60	Back	1/4" NPT	Black	Oxygen	131		132		133		134	6685-00-881-0775	135	
0- 60	Back	1/4" NPT	White	General	136		137		138		139	6685-00-585-0834	140	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges
Simplex
Gauge pressure
2", 2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters – Continued.

Range press. (psi)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers									
	Location	Type			Item No.	2" Dial	Item No.	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
0- 60	Back	O ring	White	General	141		142		143		144	6685-01-245-5227	145	
0- 100	Bottom	1/4" NPT	White	General	146	6685-00-551-8602	147	6685-00-244-1830	148		149		150	
0- 100	Back	1/4" NPT	White	General	151		152	6685-00-526-6539	153	6685-00-726-4226	154	6685-00-073-9886	155	
0- 100	Back	1/4" NPT	White	General	156		157	6685-00-747-9268	158	6685-00-264-3968	159	6685-00-135-0672	160	
0- 100	Back	1/4" NPT	White	General	161		162	6685-00-910-6949	163	6685-00-555-4197	164		165	
0- 100	Bottom	1/4" NPT	White	General	166		167	6685-01-274-7780	168		169		170	
0- 100	Bottom	1/4" NPT	White	General	171		172	6685-00-580-9733	173		174		175	
0- 100	Bottom	1/4" NPT	Black	General	176		177		178	6685-00-135-0673	179		180	
0- 100	Back	7/16" 20	White	General	181		182		183	6685-01-047-5099	184	6685-00-725-1309	185	
0- 100	Back	7/16"-20	Black	General	186		187		188	6685-01-047-5100	189		190	
0- 100	Bottom	7/16"-20	Black	General	191		192		193		194	6685-01-049-8070	195	
0- 100	Bottom	O-ring	White	General	196		197		198		199	6685-01-240-3748	200	
0- 100	Back	1/4" NPT	Black	General	201		202		203		204	6685-00-016-2342	205	
0- 100	Back	1/4" NPT	Black	General	206		207		208		209	6685-00-905-6842	210	
0- 100	Back	O-ring	White	General	211		212		213		214	6685-01-245-5223	215	
0- 100	Bottom	O ring	White	General	216		217		218		219	6685-01-245-5225	220	
0- 200	Bottom	1/4" NPT	White	General	221		222	6685-00-527-6214	223		224	6685-00-965-5435	225	
0- 200	Back	1/4" NPT	White	General	226		227	6685-00-527-6217	228	6685-00-127-6200	229	6685-00-872-4745	230	
0- 200	Bottom	7/16"-20	White	General	231		232		233	6685-00-591-1952	234		235	
0- 200	Back	7/16"-20	White	General	236		237		238	6685-01-049-8060	239	6685-01-047-5117	240	6685-01-046-6764
0- 200	Back	7/16"-20	Black	General	241		242		243	6685-01-049-8061	244		245	
0- 200	Back	7/16"-20	White	General	246		247		248	6685-01-054-3732	249	6685-00-849-5307	250	
0- 200	Back	1/4" NPT	Black	General	251		252		253	6685-00-257-4088	254		255	
0- 200	Back	1/4" NPT	White	General	256		257		258	6685-00-264-3972	259	6685-01-119-7056	260	
0- 200	Back	1/4" NPT	White	General	261		262		263		264	6685-00-725-1313	265	
0- 200	Back	1/4" NPT	Black	Oxygen	266		267		268		269	6685-00-881-0762	270	
0- 200	Back	O ring	White	General	271		272		273		274	6685-01-240-1434	275	

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Gauge pressure

2", 2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters -- Continued.

Range press. (psi)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers									
	Location	Type			Item No.	2" Dial	Item No	2 1/2" Dial	Item No	3 1/2" Dial	Item No.	4 1/2" Dial	Item No	8 1/2" Dial
0- 200	Back	1/4" NPT	White	General	276		277		278		279	6685-00-073-9885	280	
0- 200	Back	1/4" NPT	White	General	281		282		283		284	6685-00-542-1671	285	
0- 200	Back	1/4" NPT	White	General	286		287		288		289	6685-00-727-4766	290	
0- 200	Back	O-ring	White	General	291		292		293		294	6685-01-240-1426	295	
0- 200	Back	O-ring	White	General	296		297		298		299	6685-01-245-5224	300	
0- 300	Back	1/4" NPT	White	General	301		302	6685-00-527-6213	303	6685-00-555-4198	304	6685-01-013-2808	305	6685-00-132-5126
0- 300	Bottom	1/4" NPT	White	General	306		307	6685-00-405-4921	308		309	6685-00-079-1414	310	
0- 300	Back	1/4" NPT	White	General	311		312	6685-00-436-6974	313	6685-00-857-4277	314		315	6685-00-807-5867
0- 300	Bottom	1/4" NPT	White	General	316		317	6685-01-104-2427	318		319		320	
0- 300	Back	1/4" NPT	Black	General	321		322		323	6685-00-905-6843	324		325	
0- 300	Bottom	7/16"-20	White	General	326		327		328		329	6685-01-049-8072	330	
0- 300	Back	7/16"-20	Black	General	331		332		333		334	6685-01-057-9165	335	
0- 300	Back	7/16"-20	White	General	336		337		338		339	6685-01-062-4650	340	6685-00-725-1332
0- 300	Back	O-ring	Black	General	341		342		343		344	6685-01-074-2535	345	
0- 300	Back	1/4" NPT	Black	General	346		347		348		349	6685-00-881-0736	350	
0- 400	Bottom	1/4" NPT	White	General	351		352	6685-00-080-2100	353		354		355	
0- 400	Bottom	1/4" NPT	White	Oxygen	356		357	6685-00-246-2357	358		359		360	
0- 400	Back	7/16"-20	White	General	361		362		363	6685-01-047-5102	364		365	
0- 400	Back	1/4" NPT	Black	General	366		367		368	6685-00-551-9030	369		370	
0- 400	Bottom	O-ring	White	General	371		372		373		374	6685-01-240-3747	375	
0- 400	Back	1/4" NPT	White	General	376		377		378		379		380	6685-00-228-9362
0- 600	Bottom	O-ring	White	General	381		382		383	6685-01-049-6057	384		385	
0- 600	Back	7/16"-20	White	General	386		387		388	6685-01-054-3731	389		390	
0- 600	Back/ Lowr	1/4" NPT	Black	General	391		392		393	6685-00-306-4873	394		395	
0- 600	Back	7/16"-20	White	General	396		397		398	6685-00-728-1018	399		400	

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Gauge pressure

2", 2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters – Continued.

Range press. (psi)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers									
	Location	Type			Item No.	2" Dial	Item No.	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
0- 600	Bottom	7/16"-20	White	General	401		402		403	6685-01-049-8057	404		405	
0- 600	Bottom	1/4" NPT	White	General	406		407		408	6685-00-248-6990	409		410	
0- 600	Back	1/4" NPT	White	General	411		412		413		414	6685-00-248-1659	415	6685-00-807-5870
0- 600	Bottom	1/4" NPT	White	General	416		417		418		419	6685-00-469-8886	420	
0- 600	Back	1/4" NPT	White	General	421		422		423		424	6685-00-807-9653	425	
0- 600	Back	1/4" NPT	White	General	426		427		428		429	6685-01-015-4644	430	
0- 600	Back	O-ring	White	General	431		432		433		434	6685-01-076-1746	435	
0- 600	Back	O-ring	White	General	436		437		438		439	6685-01-240-1436	440	
0- 600	Back	1/4" NPT	White	General	441		442		443		444	6685-00-585-9752	445	
0- 600	Back	1/4" NPT	Black	General	446		447		448		449		450	6685-00-016-1877
0- 800	Bottom	1/4" NPT	White	General	451		452		453		454	6685-00-135-0669	455	
0- 800	Bottom	1/4" NPT	White	Oxygen	456		457		458		459	6685-00-760-6692	460	
0- 800	Back	1/4" NPT	White	General	461		462		463		464	6685-00-934-8669	465	6685-00-128-1861
0- 800	Back	1/4" NPT	White	General	466		467		468		469		470	6685-00-807-5872
0- 1000	Bottom	1/4" NPT	Black	General	471		472	6685-00-527-6323	473		474		475	
0- 1000	Back	1/4" NPT	Black	General	476		477		478	6685-00-251-1356	479		480	
0- 1000	Bottom	7/16"-20	White	General	481		482		483	6685-01-050-1831	484	6685-01-057-9160	485	6685-01-046-6766
0- 1000	Back	1/4" NPT	Black	General	486		487		488	6685-00-527-7439	489		490	
0- 1000	Back	1/4" NPT	White	Oxygen	491		492		493		494	6685-00-078-3144	495	
0- 1000	Bottom	1/4" NPT	White	General	496		497		498		499	6685-00-079-1415	500	6685-00-807-5875
0- 1000	Back	1/4" NPT	White	General	501		502		503		504	6685-00-872-4749	505	6685-00-806-7633
0- 1000	Back	1/4" NPT	Black	Oxygen	506		507		508		509	6685-00-881-0742	510	
0- 1000	Back	7/16"-20	Black	General	511		512		513		514	6685-01-057-9161	515	
0- 1000	Back	7/16"-20	White	General	516		517		518		519	6685-01-057-9162	520	6685-01-046-6768
0- 1000	Back	7/16"-20	Black	General	521		522		523		524	6685-01-057-9163	525	
0- 1000	Back	1/4" NPT	White	General	526		527		528		529	6685-00-739-2792	530	
0- 1000	Bottom	1/4" NPT	White	General	531		532		533		534	6685-00-807-5863	535	
0- 1000	Back	O-ring	White	General	536		537		538		539	6685-01-245-5222	540	

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Gauge pressure

2", 2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters – Continued.

Range press. (psi)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers									
	Location	Type			Item No.	2" Dial	Item No.	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
0- 1500	Bottom	1/4" NPT	White	Oxygen	541		542		543		544	6685-00-469-8887	545	
0- 1500	Back	1/4" NPT	Black	General	546		547		548		549	6685-00-016-1886	550	
0- 1500	Back	1/4" NPT	White	General	551		552		553		554	6685-00-807-5864	555	6685-00-807-5876
0- 1500	Bottom	1/4" NPT	White	General	556		557		558		559	6685-00-807-5865	560	
0- 1500	Back	O-ring	White	General	561		562		563		564		565	6685-00-078-3141
0- 1500	Back	1/4" NPT	White	General	566		567		568		569	6685-00-225-0369	570	6685-00-542-1139
0- 1500	Back	1/4" NPT	White	General	571		572		573		574		575	6685-00-585-1236
0- 2000	Back	1/4" NPT	Black	General	576		577		578	6685-00-515-5109	579		580	
0- 2000	Bottom	7/16"-20	White	General	581		582		583	6685-01-047-5108	584	6685-01-047-5120	585	
0- 2000	Back	1/4" NPT	White	General	586		587		588	6685-00-127-6201	589	6685-00-803-8628	590	
0- 2000	Bottom	1/4" NPT	White	General	591		592		593	6685-00-530-4331	594		595	6685-00-807-5879
0- 2000	Back	7/16"-20	White	General	596		597		598		599	6685-01-047-5121	600	
0- 2000	Back	7/16"-20	Black	General	601		602		603		604	6685-01-047-5122	605	
0- 2000	Back	7/16"-20	White	General	606		607		608		609	6685-01-067-3743	610	
0- 3000	Back	1/4" NPT	White	General	611		612	6685-00-514-4072	613		614		615	6685-00-248-1691
0- 3000	Back	1/4" NPT	White	Oxygen	616		617		618	6685-00-073-6733	619	6685-00-881-0763	620	
0- 3000	Back	7/16"-20	White	General	621		622		623	6685-01-047-5106	624	6685-01-047-5125	625	
0- 3000	Bottom	1/4" NPT	White	General	626		627		628		629	6685-00-252-3037	630	
0- 3000	Bottom	1/4" NPT	Black	General	631		632		633		634	6685-00-067-8881	635	
0- 3000	Back	7/16"-20	Black	General	636		637		638		639	6685-01-047-5124	640	
0- 3000	Bottom	7/16"-20	White	General	641		642		643		644	6685-01-047-5128	645	
0- 3000	Back	7/16"-20	White	General	646		647		648		649	6685-01-074-2536	650	
0- 3000	Back	O-ring	White	General	651		652		653		654	6685-01-240-1437	655	
0- 3000	Back	O-ring	White	General	656		657		658		659	6685-01-240-3745	660	
0- 3000	Bottom	O-ring	White	General	661		662		663		664	6685-01-240-3746	665	
0- 3000	Back	1/4" NPT	Black	General	666		667		668		669	6685-00-469-8893	670	
0- 3000	Back	7/16"-20	White	General	671		672		673		674	6685-01-169-4345	675	

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Gauge pressure

2", 2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters – Continued.

Range press. (psi)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers									
	Location	Type			Item No.	2" Dial	Item No.	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
0- 5000	Back	1/4" NPT	White	General	676		677	6685-00-819-8824	678		679	6685-00-542-1140	680	6685-00-248-1693
0- 5000	Bottom	1/4" NPT	White	Oxygen	681		682		683	6685-00-016-2266	684		685	
0- 5000	Bottom	1/4" NPT	White	General	686		687		688	6685-00-198-9473	689	6685-00-965-5438	690	
0- 5000	Back	7/16"-20	White	General	691		692		693	6685-01-047-5104	694	6685-01-046-6755	695	
0- 5000	Bottom	7/16"-20	White	General	696		697		698	6685-01-047-5110	699	6685-01-046-6753	700	
0- 5000	Back	7/16"-20	White	General	701		702		703	6685-01-049-8069	704	6685-01-047-5127	705	
0- 5000	Bottom	7/16"-20	White	General	706		707		708		709	6685-01-046-6754	710	
0- 5000	Back	7/16"-20	Black	General	711		712		713		714	6685-01-046-6756	715	
0- 5000	Back	O-ring	White	General	716		717		718		719	6685-01-240-1435	720	
0- 5000	Back	O-ring	White	General	721		722		723		724	6685-00-123-1922	725	
0- 5000	Back	7/16"-20	White	General	726		727		728		729	6685-00-176-5883	730	
0- 5000	Back	1/4" NPT	Black	Oxygen	731		732		733		734	6685-00-325-0426	735	
0- 5000	Back	1/4" NPT	White	General	736		737		738		739	6685-00-585-9756	740	
0- 5000	Back	1/4" NPT	White	General	741		742		743		744	6685-00-836-2679	745	
0- 8000	Back	7/16"-20	White	General	746		747		748	6685-01-049-8067	749	6685-01-046-6757	750	
0- 8000	Bottom	7/16"-20	White	General	751		752		753		754	6685-01-046-6760	755	
0- 8000	Bottom	1/4" NPT	White	General	756		757		758		759	6685-00-123-1923	760	
0-10000	Back	7/16"-20	White	General	761		762		763	6685-01-047-5113	764		765	
0-10000	Back	1/4" NPT	Black	Oxygen	766		767		768		769	6685-00-881-0735	770	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

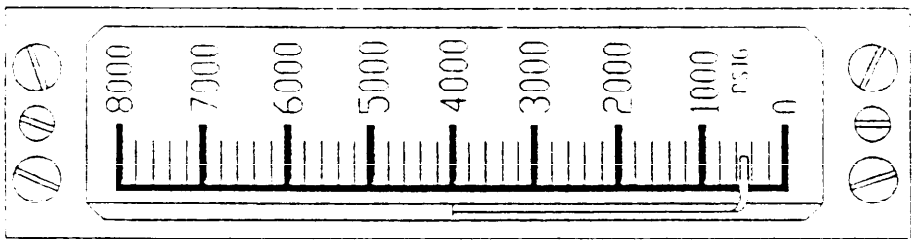


FIGURE 2. Simplex gauge pressure Helical-wound edgeview mechanical pressure indicator (HEMPI).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges
Simplex
Gauge pressure
Helical-wound edgeview mechanical pressure indicators (HEMPI)

Range press. (PSI)	Connection Data		Dial color	Cleaning	National Stock Numbers	
	Location	Type			Item No.	
0- 60	Back	7/16"-20	Both	General	771	6685-01-273-6070
0- 100	Back	7/16"-20	Both	General	772	6685-01-273-6071
0- 300	Back	7/16"-20	Both	General	773	6685-01-273-6072
0- 600	Back	7/16"-20	Both	General	774	6685-01-273-6073
0-1000	Back	7/16"-20	Both	General	775	6685-01-267-6444
0-1500	Back	7/16"-20	Both	General	776	6685-01-267-6445
0-3000	Back	7/16"-20	Both	General	777	6685-01-267-6446
0-5000	Back	7/16"-20	Both	General	778	6685-01-267-6447
0-8000	Back	7/16"-20	Both	General	779	6685-01-267-6448

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

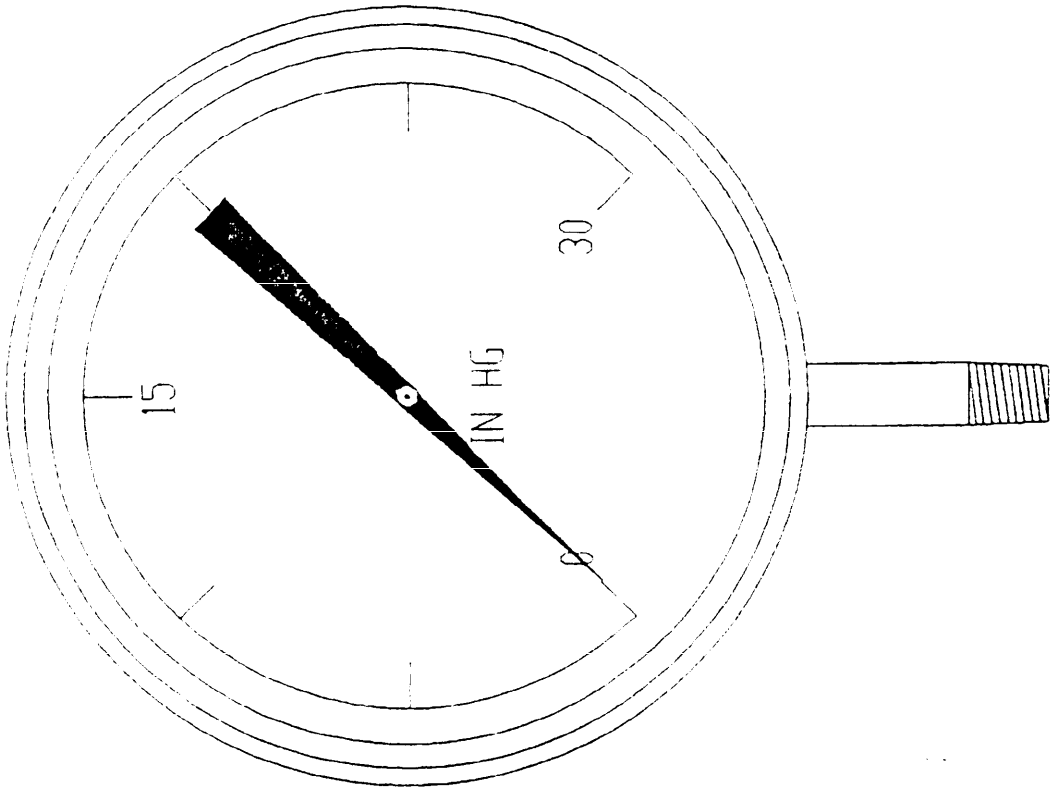


Figure 3. *Simplex vacuum*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

the requirements and pass the tests herein. sufficiently to meet

Gauges
Simplex
Vacuum
3 1/2", 4 1/2" and 8 1/2" dial diameters

Range vacuum (IN HG)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers					
	Location	Type			Item No	3 1/2" dial	Item No	4 1/2" dial	Item No	8 1/2" dial
0-30	Bottom	7/16"-20	White	General	780	6685-01-049-8076	781	6685-00-906-4006	782	6685-01-049-8074
0-30	Back	1/4" NPT	White	General	783		784		785	
0-30	Back	7/16"-20	White	General	786		787	6685-01-047-5138	788	6685-00-725-1307
0-30	Back	7/16"-20	White	General	789		790		791	6685-01-047-5140

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

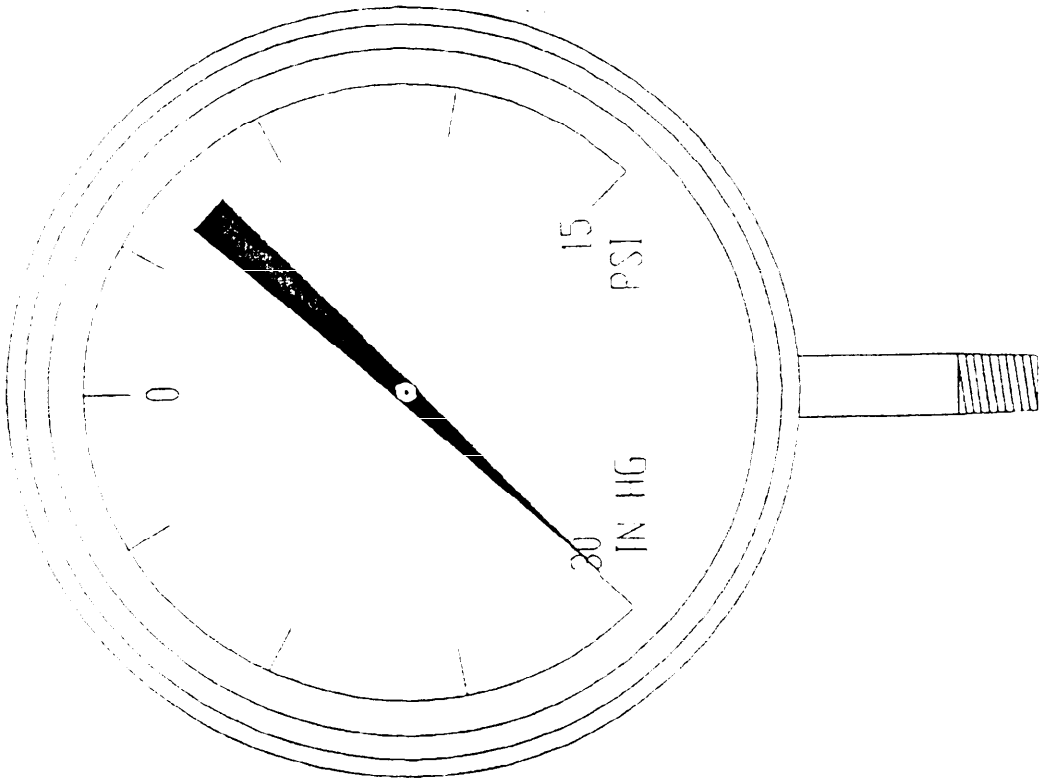


Figure 4. *Simplex compound.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Compound

2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters

Range		Connection data		Dial color	Cleaning	Dial diameters and national stock numbers							
Vacuum (IN HG)	Press. (PSI)	Location	Type			Item No.	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
30	0- 15	Back	1/4" NPT	White	General	792		793		794	6685-00-127-6198	795	
30	0- 15	Back	1/4" NPT	White	General	796		797		798	6685-00-841-1425	799	
30	0- 15	Back	1/4" NPT	White	General	800		801		802	6685-00-906-3958	803	
30	0- 15	Back	O-ring	White	General	804		805		806	6685-01-240-1433	807	
30	0- 15	Back	O-ring	White	General	808		809		810	6685-01-240-1438	811	
30	0- 30	Back	7/16"-20	White	General	812		813	6685-01-046-6741	814	6685-01-046-6749	815	
30	0- 30	Bottom	7/16"-20	White	General	816		817	6685-01-046-6742	818	6685-01-046-6750	819	
30	0- 30	Back	1/4" NPT	White	General	820		821		822	6685-00-291-1151	823	
30	0- 30	Back	1/4" NPT	White	General	824		825		826	6685-00-965-5195	827	
30	0- 30	Back	7/16"-20	White	General	828		829		830	6685-01-047-5088	831	
30	0- 30	Back	7/16"-20	White	General	832		833		834	6685-01-047-5091	835	
30	0- 60	Back	O-ring	White	General	836		837		838	6685-00-974-6509	839	
30	0- 100	Back	O-ring	White	General	840		841	6685-00-123-1926	842		843	
30	0- 100	Back	7/16"-20	White	General	844		845	6685-01-046-6743	846		847	
30	0- 100	Bottom	1/4" NPT	White	General	848		849		850	6685-00-906-4003	851	
30	0- 150	Back	7/16"-20	White	General	852		853	6685-01-046-6744	854	6685-00-725-1346	855	
30	0- 150	Back	O-ring	White	General	856		857		858	6685-00-079-9588	859	
30	0- 150	Back	7/16"-20	White	General	860		861		862	6685-01-047-5081	863	
30	0- 150	Back	7/16"-20	Black	General	864		865		866	6685-01-047-5082	867	
30	0- 150	Bottom	O-ring	White	General	868		869		870	6685-01-240-3749	871	
30	0- 150	Back	1/4" NPT	White	General	872		873		874	6685-01-122-7465	875	
30	0- 200	Back	1/4" NPT	White	General	876		877	6685-00-056-0839	878		879	
30	0- 200	Back	1/4" NPT	White	General	880		881	6685-00-264-3986	882		883	
30	0- 200	Back	7/16"-20	White	General	884		885		886	6685-01-047-5083	887	

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Compound

2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters – Continued.

Range		Connection data				Dial diameters and national stock numbers							
Vacuum (IN HG)	Press. (PSI)	Location	Type	Dial color	Cleaning	Item No	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
30	0- 300	Back	1/4" NPT	Black	General	888		889	6685-00-527-6362	890		891	
30	0- 300	Back	7/16"-20	White	General	892		893	6685-01-046-6746	894	6685-01-047-5089	895	
30	0- 300	Bottom	7/16"-20	White	General	896		897	6685-01-046-6747	898	6685-01-047-5084	899	
30	0- 300	Bottom	1/4" NPT	White	General	900		901		902	6685-01-252-3017	903	
30	0- 400	Back	1/4" NPT	Black	General	904		905		906	6685-00-527-6299	907	
30	0- 600	Bottom	7/16"-20	White	General	908		909	6685-01-046-6748	910		911	
30	0- 600	Back	7/16"-20	White	General	912		913		914	6685-01-047-5085	915	
30	0-1000	Back	7/16"-20	White	General	916		917		918	6685-01-047-5086	919	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.



Figure 5. *Simplex compound helical-wound edgeview mechanical pressure indicator (HEMPI).*

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Compound

Helical-wound edgeview mechanical pressure indicators (HEMPI)

Range		Connection data		Dial Color	Cleaning	National stock numbers	
Vacuum (IN HG)	Press. (PSI)	Location	Type			Item No.	
30	0- 600	Back	7/16"-20	Both	General	920	6685-01-267-6443

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

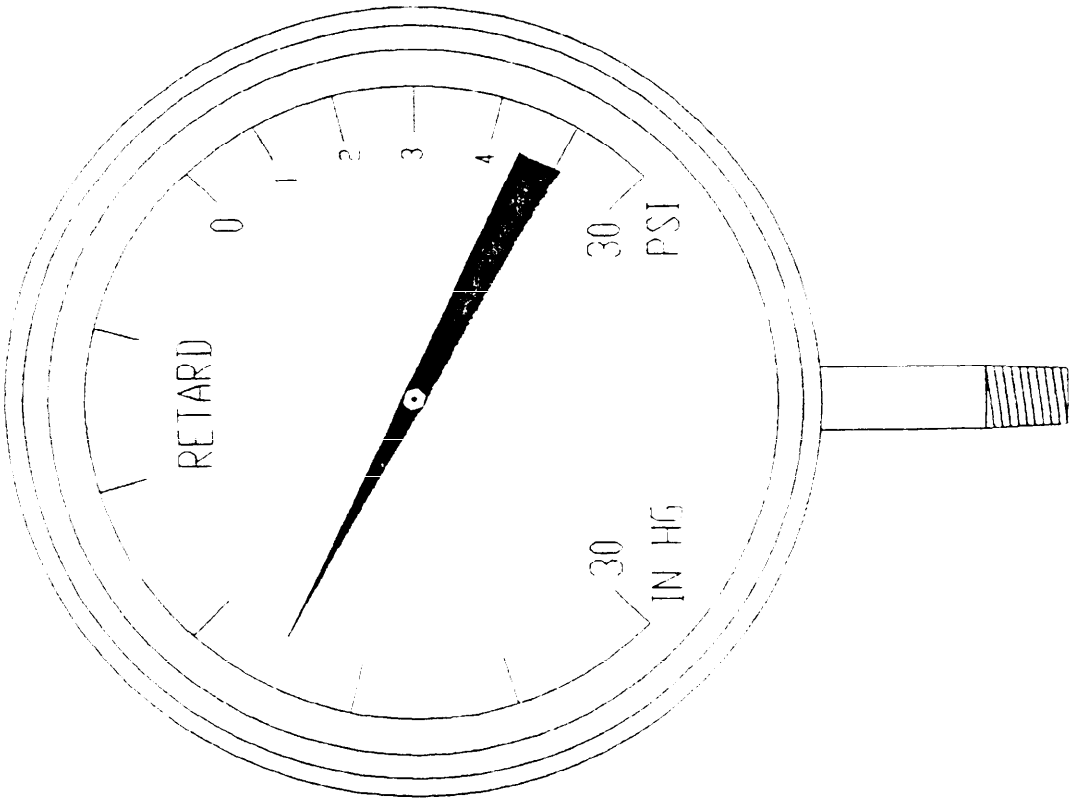


Figure 6. *Simplex retarded, compound.*

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex

Retarded, Compound

2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters

Range		Connection data		Dial color	Cleaning	Dial diameters and national stock numbers							
Vacuum (IN HG)	Press. (PSI)	Location	Type			Item No.	2 1/2" Dial	Item No.	3 1/2" Dial	Item No.	4 1/2" Dial	Item No.	8 1/2" Dial
30	0- 30	Bottom	7/16"-20	White	General	921		922		923	6685-01-049-8050	924	
30	0-150	Back	O-ring	White	General	925		926		927	6685-01-240-1432	928	

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:51Z
Check the source to verify that this is the current version before use.

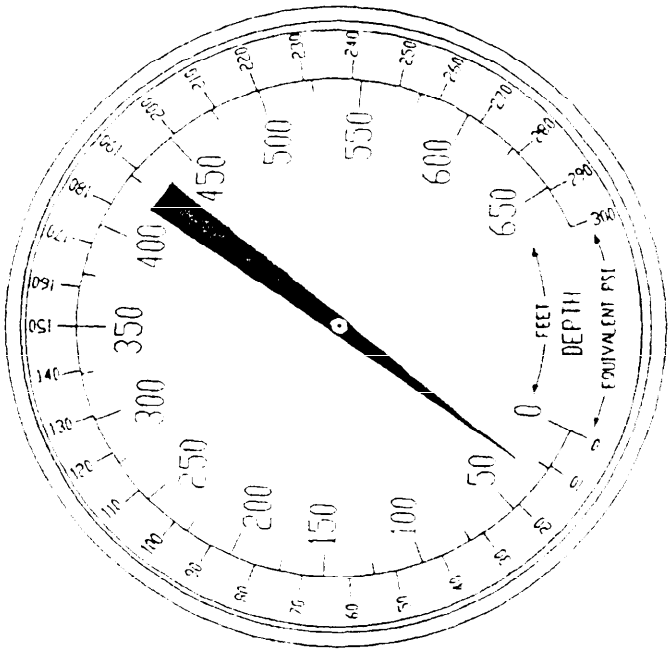


Figure 7. *Simplex – Caisson gauge pressure.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges

Simplex – Caisson

Gauge pressure

3 1/2", 4 1/2" and 8 1/2" dial diameters

Range press (psi)	Depth (ft)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers					
		Location	Type			Item No.	3 1/2" dial	Item No.	4 1/2" dial	Item No.	8 1/2" dial
0-300	675	5 O'clock	Vent	White	General	929		930	6685-01-087-7347	931	
0-300	675	5 O'clock	Vent	White	General	932		933	6685-01-122-5983	934	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

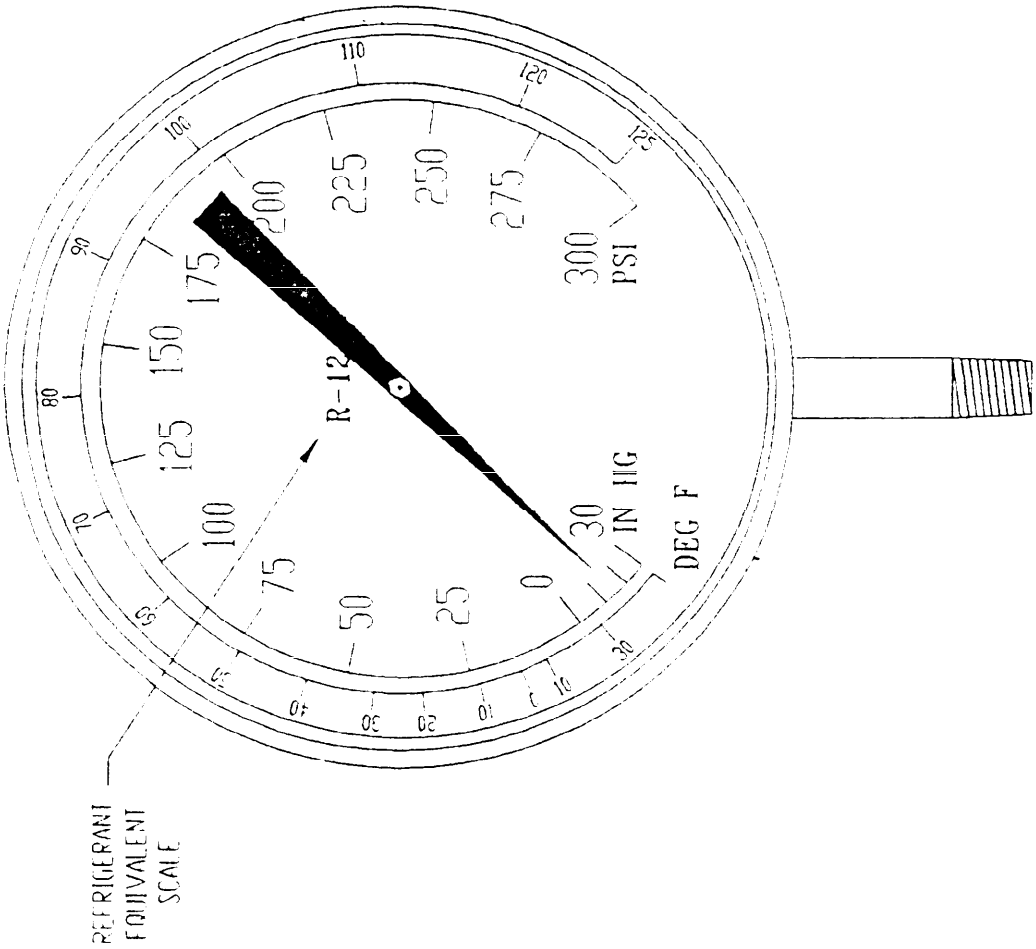


FIGURE 8. *Simplex -- Refrigerant compound.*

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the current version before use.

Gauges
Simplex – Refrigerant
Compound
2 1/2", 3 1/2", 4 1/2" and 8 1/2" dial diameters

Range		Connection data		Dial color	Cleaning	Dial diameters and national stock numbers							
Vacuum (IN HG)	Press. (PSI)	Location	Type			Item No	2 1/2" Dial	Item No	3 1/2" Dial	Item No.	4 1/2" Dial	Item No	8 1/2" Dial
30	0- 15	Back	O-ring	Black	General	935		936		937		938	6685-00-816-8987
30	0-100	Back	O-ring	White	General	939		940	6685-00-132-1175	941		942	

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

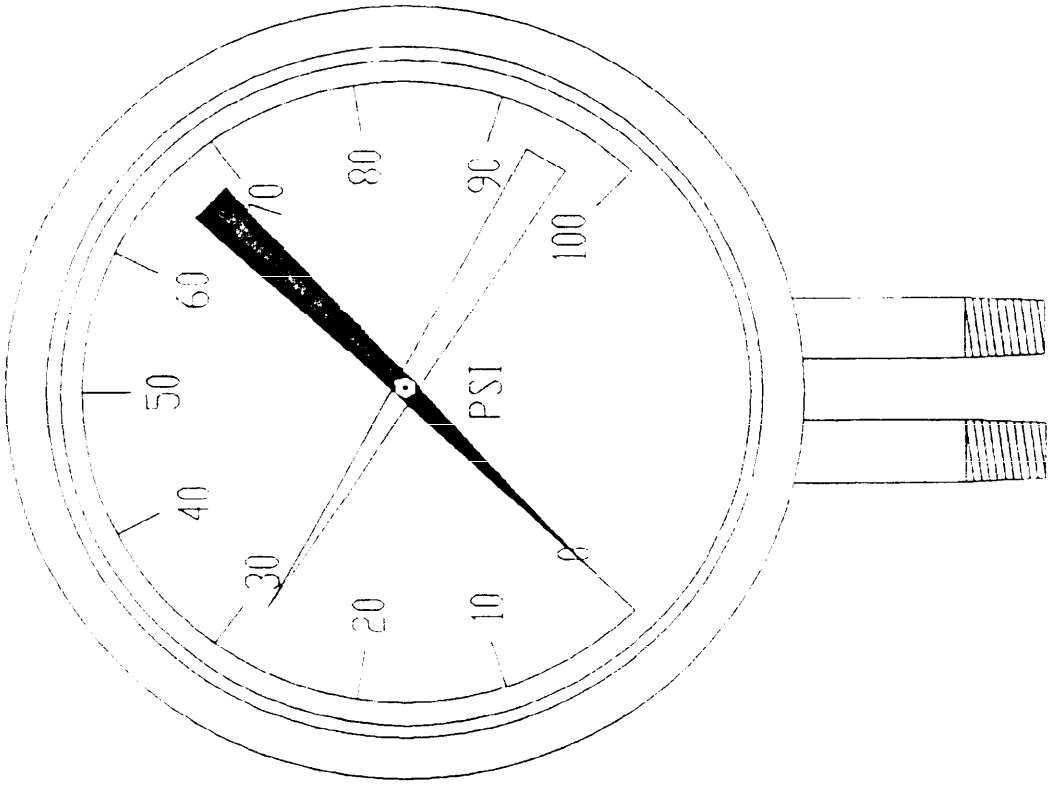


FIGURE 9. *Duplex gauge pressure.*

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the current version before use.


Gauges
Duplex
Gauge pressure
3 1/2", 4 1/2" and 8 1/2" dial diameters

Range press (psi)	Connection data		Dial color	Cleaning	Dial diameters and national stock numbers					
	Location	Type			Item No.	3 1/2" dial	Item No	4 1/2" dial	Item No	8 1/2" dial
0- 30	Back	1/4" NPT	Black	General	943		944	6685-00-530-0357	945	
0- 60	Bottom	1/4" NPT	White	General	946		947	6685-00-974-6516	948	
0-100	Bottom	7/16"-20	White	General	949		950	6685-01-047-5130	951	
0-100	Bottom	1/4" NPT	White	General	952		953	6685-00-246-2360	954	
0-200	Bottom	O-ring	White	General	955		956	6685-01-240-3750	957	
0-200	Back	1/4" NPT	Black	General	958		959	6685-00-526-8702	960	
0-200	Back	1/4" NPT	White	General	961		962	6685-00-542-1136	963	
0-300	Back	O-ring	White	General	964		965	6685-00-086-9323	966	
0-400	Back	1/4" NPT	White	General	967		968	6685-00-585-4429	969	
0-800	Bottom	1/4" NPT	White	General	970		971	6685-00-135-0674	972	
0-800	Back	7/16"-20	White	General	973		974	6685-01-047-5136	975	
0-1000	Bottom	1/4" NPT	White	General	976		977	6685-00-252-0555	978	


Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

GAUGES
MOUNTING DIMENSIONS
3 1/2", 4 1/2", AND 8 1/2" DIAL DIAMETERS

BOTTOM CONNECTED GAUGE, SURFACE MOUNTED

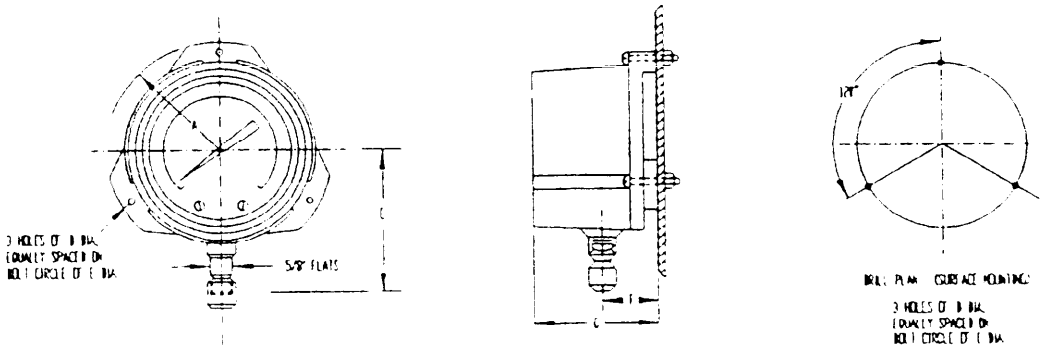

BACK CONNECTED GAUGE, PANEL MOUNTED (USING FLUSH MOUNTING RING)

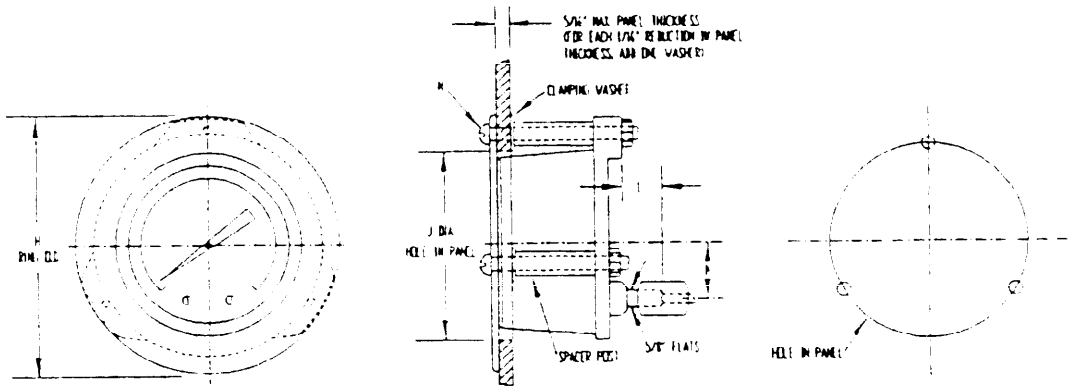

DIMENSIONS (INCHES)

GAUGE SIZE	A	C	D	E	F	G	H	J	L	M	SCREW SIZE N	SPACER POST LENGTH
3 1/2	2 5/16	3 23/32	1/32	4-1/4	7/8	2-1/2	4-3/4	4-13/32	1-1/4	1-9/64	10-24 x 7/8	1-19/32
4-1/2	2-7/8	3 23/32	1/32	5-3/8	7/8	2-1/2	6	5-19/32	1-1/4	1-9/64	10-24 x 7/8	1-19/32
8-1/2	5-1/4	.....	9/32	9-5/8	...	2-1/2	10 13/32	9-29/32	1-1/4	1-9/64	1/4-20 x 7/8	1-3/4

FIGURE 10. *Gauges mounting dimensions 3 1/2", 4 1/2", and 8 1/2" dial diameters.*

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:51Z
Check the source to verify that this is the currentversion before use.

GAUGES
CONNECTION LOCATIONS

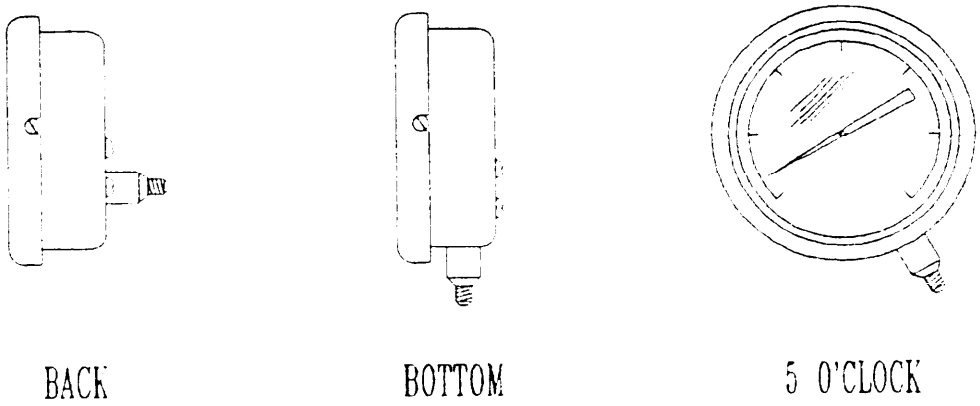


FIGURE 11. *Gauges connection locations.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-HDBK-801(SH)	31 October 1990

3. DOCUMENT TITLE

LIST OF PRESSURE GAUGES

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

NAME Naval Sea Systems Command (SEA 5674A)	b. TELEPHONE (Include Area Code) (1) Commercial (703) 602-6020	(2) AUTOVON (AV) 332-6020
c. ADDRESS (Include Zip Code) Washington, DC 20362-5101	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:51Z
Check the source to verify that this is the current version before use.