The documentation and process conversion measures necessary to comply with this revision shall be completed by 13 November 2003.

INCH-POUND

MIL-PRF-19500/444G
13 August 2003
SUPERSEDING
MIL-PRF-19500/444F
10 April 2003

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING, TYPES 1N5711-1, 1N5711UR-1, 1N5711UB, 1N5711UBCA, 1N5711UBD, 1N5711UBCC, 1N5712-1, 1N5712UR-1, 1N5712UB, 1N5712UBCA, 1N5712UBD, 1N5712UBCC, 1N6857-1, 1N6857UR-1, 1N6858-1, AND 1N6858UR-1, JAN, JANTX, JANTXV, JANS, JANHC, AND JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for Schottky barrier diodes. Four levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500. Two levels of product assurance are provided for each unencapsulated device type.

1.2 Physical dimensions. See figure 1, similar to DO-35, figure 2, UR package DO-213AA, figure 3 (UB) surface mount, and figure 4, JANHC and JANKC.

1.3 Maximum ratings.

Type	V_{RWM}	I_{O1}	I_{O2} (1)	T_{STG} and T_J	$R_{\theta JL}$ L = .375 inch (9.52 mm) (2)	$R_{\theta JEC}$ (UR)	$R_{\theta JSP}$ (UBx)	ESDS class
	V(pk)	mA dc	mA dc		(leaded)	(UR)	(UBx)	
1N5711-1	50	33 (3)	5	-65°C to	250			1
1N5711UR-1	50	33 (4)	5	+150°C		100		1
1N5711UB	50	33 (4)	5				100	1
1N5711UBCA	50	33 (4)	5				100	1
1N5711UBCC	50	33 (4)	5				100	1
1N5711UBD	50	33 (4)	5				100	1
1N6858-1	50	75 (5)	10		250			2
1N6858UR-1	50	75 (6)	10			100		2
1N5712-1	16	75 (5)	20		250			1
1N5712UR-1	16	75 (6)	20			100		1
1N5712UB	16	75 (6)	20				100	1
1N5712UBCA	16	75 (6)	20				100	1
1N5712UBCC	16	75 (6)	20				100	1
1N5712UBD	16	75 (6)	20				100	1
1N6857-1	16	150 (7)	50		250			2
1N6857UR-1	16	150 (8)	50			100		2

See notes at end of table

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

1.3 Maximum ratings – Continued.

(1) Maximum I_O rating to ensure τ_{CL} compliance (< 100 ps).
(2) Lead length = .375 inch (9.52 mm).
(3) At T_L = +130°C and L = .375 inch, derate I_O to 0 at +150°C.
(4) At T_{EC} and T_{SP} = +140°C, derate I_O to 0 at +150°C.
(5) At T_L = +110°C and L = .375 inch, derate I_O to 0 at +150°C
(6) At T_{EC} and T_{SP} = +130°C, derate I_O to 0 at +150°C.
(7) At T_L = +70°C and L = .375 inch, derate I_O to 0 at +150°C
(8) At T_{EC} and T_{SP} = +110°C, derate I_O to 0 at +150°C.


1.4 Primary electrical characteristics.

Type (1)	$V_{(BR)1}$ I_R = 10 µA dc (min)	V_{F1} I_F = 1 mA dc (max)	V_{F2} I_F = 15 mA dc (max)	I_{R1} V_R = 50 V dc (max)	C V_R = 0, f = 1 MHz V_{sig} = 50 m V(pk) (max)	τ_{CL} (max)		$Z_{\theta JX}$ (max)
	V dc	V dc	V dc	nA dc	pF	ps	mA	°C/W
1N5711-1	70	0.410	1.0	200	2.0	100	5	40
1N6858-1	70	0.360	0.65	200	4.5	100	10	40

Type (1)	$V_{(BR)1}$ I_R = 10 µA dc (min)	V_{F1} I_F = 1 mA dc (max)	V_{F2} I_F = 35 mA dc (max)	I_{R1} V_R = 16 V dc (max)	C V_R = 0, f = 1 MHz V_{sig} = 50 mv(pk) (max)	τ_{CL} (max)		$Z_{\theta JX}$ (max)
	V dc	V dc	V dc	nA dc	pF	ps	mA	°C/W
1N5712-1	20	0.410	1.0	150	2.0	100	20	40
1N6857-1	20	0.350	0.75	150	4.5	100	50	40

(1) Electrical characteristics are for all package styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

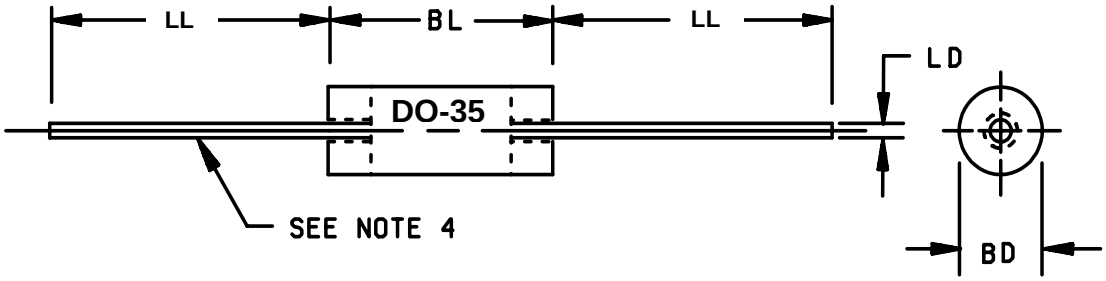


Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
BL	.150	.170	3.81	4.32	3
BD	.068	.076	1.73	1.93	3, 4
LL	1.000	1.500	25.40	38.10	
LD	.014	.022	0.36	0.56	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions BL and LD include all components of the diode periphery except the sections of the leads over which the diameter is controlled.
4. Dimension BD shall be measured at the largest diameter.
5. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions for DO-35 (1N5711-1, 1N5712-1, 1N6857-1 and 1N6858-1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

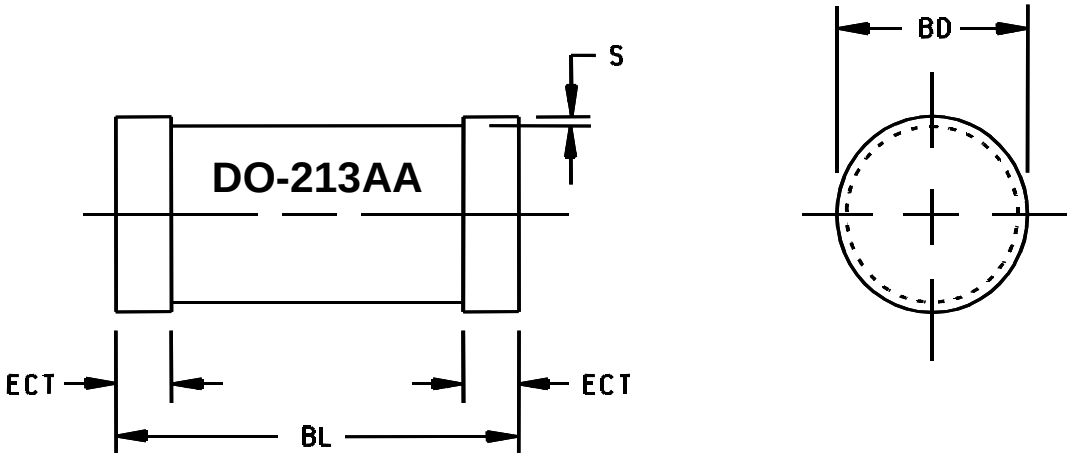


Dimensions					
Ltr	Inches		Millimeters		Notes
	Min	Max	Min	Max	
BD	.063	.067	1.60	1.70	
BL	.130	.146	3.30	3.71	
ECT	.016	.022	0.41	0.55	
S	.001 Min		0.03 Min		


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 2. Physical dimensions for DO-213AA (1N5711UR-1, 1N5712UR-1, 1N6857UR-1, and 1N6858UR-1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

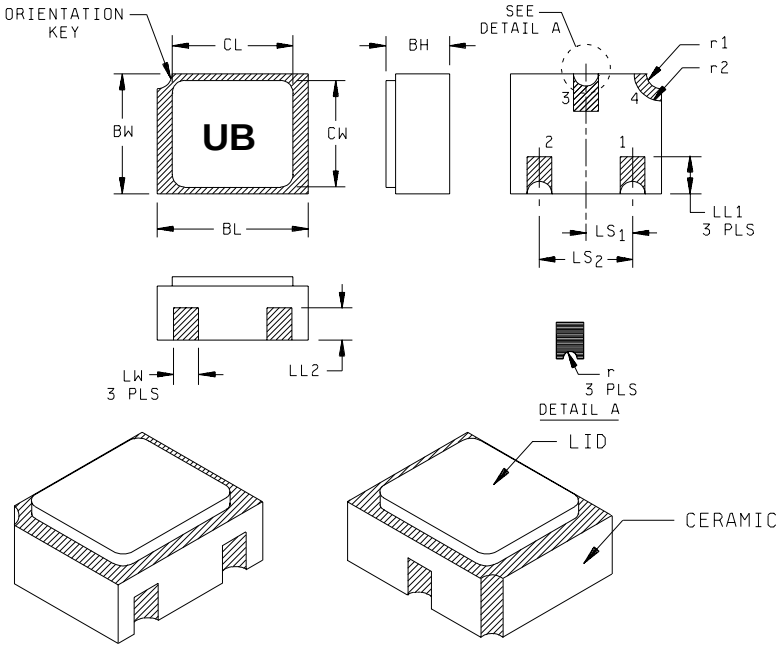


Symbol	Dimensions				Note	Symbol	Dimensions				Note
	Inches		Millimeters				Inches		Millimeters		
	Min	Max	Min	Max			Min	Max	Min	Max	
BH	.046	.056	0.97	1.42		LS1	.035	.040	0.89	1.02	
BL	.115	.128	2.82	3.25		LS2	.071	.079	1.81	2.01	
BW	.085	.108	2.41	2.74		LW	.016	.024	0.41	0.61	
CL		.128		3.25		r		.008		0.20	
CW		.108		2.74		r1		.012		0.31	
LL1	.022	.038	0.56	0.96		r2		.022		0.56	
LL2	.017	.035	0.43	0.89							

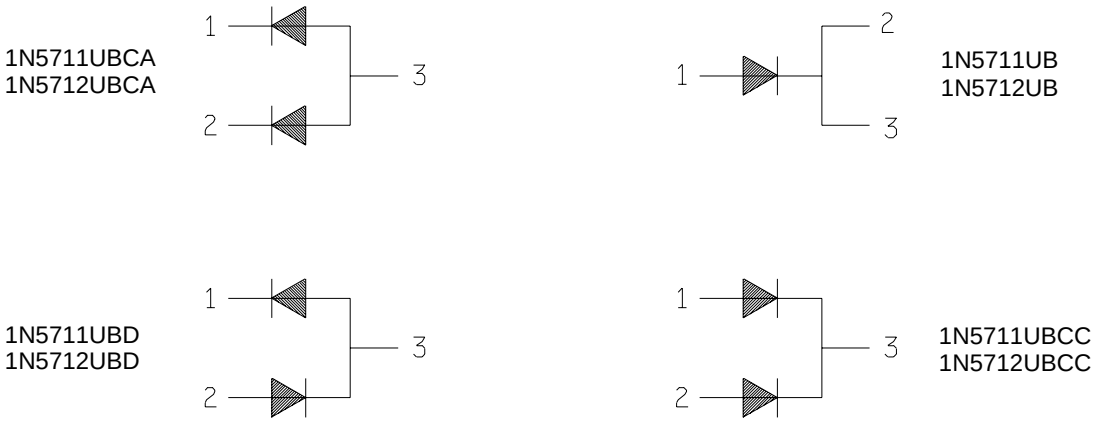

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Ceramic package only.

FIGURE 3. Physical dimensions, surface mount (UB version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

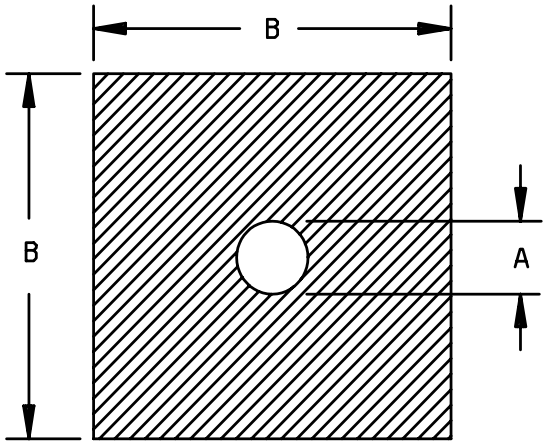

BACKSIDE IS CATHODE

1N5711 Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
A	.004	.005	.102	.127	
B	.0130	.0170	.330	.430	

1N5712 Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
A	.0029	.0035	.074	.089	
B	.0130	.0170	.330	.430	

1N6857, 1N6858 Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
A	.0055	.0065	.140	.165	
B	.0130	.0170	.330	.430	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Element evaluation accomplished utilizing TO-5 package.
4. The physical characteristics of the die are:
   Metallization:
   Top (anode): Al.
   Back (cathode): Au.
   Al thickness: 25,000 Å minimum.
   Gold thickness: 4,000 Å minimum.
   Chip thickness: .010 inch (0.25 mm) ±.002 inch (0.05 mm).
5. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 4. Physical dimensions, JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

DEPARTMENT OF DEFENSE

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Document Automation and Production Services (DAPS), Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWING

DEFENSE ELECTRONICS SUPPLY CENTER (DESC)

C68001 - Test Fixture for Effective Minority Carrier Lifetime.

(Copies of DESC Drawing C68001 are available from Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43216-5000.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows.

EC	End-cap.
UR	Surface mount case outline, round end-cap.
τ_{CL}	Effective carrier lifetime.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500 and figures 1, 2, 3, and 4 herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

* 3.4.2 Diode construction. All devices (except UB version) shall be metallurgically bonded, double plug construction in accordance with the requirements of MIL-PRF-19500. All glass diodes shall be designed with sufficient thermal compensation in the axial direction to optimize tensile and compressive stresses. Dimensional analysis is required of all materials used to achieve axial thermal compensation. Dimensional tolerances and corresponding coefficient of thermal expansion (CTE) shall be documented on the DSCC Design and Construction Form 36D and shall be approved by the qualifying activity to maintain qualification. Dimensional tolerances shall be sufficiently tight enough to prevent excessive stresses due to the inherent CTE mismatch. The UB devices shall be eutectically mounted and wire bonded in a ceramic package.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4 and table I.

3.6 Electrical test requirements. The electrical test requirements shall be table I as specified herein.

3.7 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.7.1 Polarity. The polarity of axial leaded devices shall be indicated with a contrasting color band to denote the cathode end. No color coding will be permitted.

3.7.2 UR devices. UR devices shall be marked with a cathode band only. Initial container package marking will be in accordance with MIL-PRF-19500.

3.7.3 UB devices. The part number may be reduced to J5711, JX5711, or JV5711. Manufacturer's identification and date code shall be marked on the devices.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.1.1 Sampling inspection. Sampling inspection shall be in accordance with MIL-PRF-19500.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.2.1 Group E qualification. Group E qualification shall be performed herein for qualification or requalification only. In case qualification was awarded to a prior revision of the associated specification that did not request the performance of table II tests, the tests specified in table II herein shall be performed on the first inspection lot to this revision to maintain qualification.

4.2.2 JANHC and JANKC devices. Qualification shall be in accordance with MIL-PRF-19500.

4.3 Screening (JANS). Screening shall be in accordance with table IV of MIL-PRF-19500 and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement JANS level
1a	Required
1b	Required
2	Not required
3a 3b (1) 3c	Required Not applicable Required (see 4.3.3)
4, 5, 6 and 7a	Not applicable
7b	Required
8	Required
9 and 10	Not applicable
11	Required I_{R1} and V_{F1}
12	Required, see 4.3.1
(2) 13	Required. Subgroup 2 and 3 of table I herein; $\Delta I_{R1} \leq$ 100 percent of initial reading or 25 nA whichever is greater; $\Delta V_{FM1} \leq \pm$ 20 mV dc.
14a 14b	Not applicable Optional (3)
15	Required
16	Required
17	Not applicable

See notes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, JANTXV) - Continued.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANTXV and JANTX level	JAN level
1a	Not required	Not required
1b	Required (JANTXV only)	Not required
2	Not required	Not required
3a	Required	Required in accordance with MIL-PRF-19500, JANTX level
3b	Not applicable	Not applicable
(1) 3c	Required (see 4.3.3)	Required (see 4.3.3)
4, 5, 6 and 7a	Not applicable	Not applicable
7b	Required	Not required
8	Not required	Not required
9 and 10	Not applicable	Not applicable
11	Required. I_{R1} and V_{F1}	Not applicable
12	Required. See 4.3.1, t = 48 hours	Not applicable
(2) 13	Subgroup 2 of table I herein; $\Delta I_{R1} \leq 100$ percent of initial reading or 50 nA whichever is greater; $\Delta V_{F1} \leq \pm 40$ mV dc.	Not applicable
14a	Not applicable	Not applicable
14b	Optional (3)	(Not required)
15 and 16	Not required	Not required
17	Not applicable	Not applicable

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed inaccordance with table IV of MIL-PRF-19500, screen 3 prior to this thermal test.
(2) Test within 24 hours after removal from test.
(3) In accordance with MIL-PRF-19500.

4.3.1 Burn-in conditions. Burn-in conditions are as follows: High temperature reverse bias (HTRB), method 1038 of MIL-STD-750, test condition A, V_R = 40 V; T_A = +150°C (min.) 1N5711, 1N6858. V_R = 12.8V T_A = +150°C (min) 1N5712, 1N6857.

4.3.2 Screening (JANHC or JANKC). Screening of JANC die shall be in accordance with MIL-PRF-19500, “Discrete Semiconductor Die/Chip Lot Acceptance”. Burn-in duration for the JANKC level follows JANS requirements; the JANHC follows JANTX requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.3.3 Thermal impedance ($Z_{\theta JX}$ measurements). The $Z_{\theta JX}$ measurements shall be performed in accordance with method 3101 of MIL-STD-750 to identify and remove atypical devices.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection:

a. I_M measurement current .....1 mA to 10 mA.

b. I_H forward heating current.....50 mA to 200 mA.

c. t_H heating time .....10 ms.

d. t_{MD} measurement delay time.....70 µs maximum.

4.4.2 Group B inspection . Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIa (for JANS) and table VIb (for JAN, JANTX, and JANTXV) of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	See 4.5.5	Preconditioning and delta's for temperature cycling.
B4	1037	I_{O1} at rated V_{RWM}; f = 60 Hz; T_A = room ambient as defined in 4.5 of MIL-STD-750; $t_{on} = t_{off}$ = 3 minutes minimum for 2,000 cycles; (see 4.5.1).
B5	1038	HTRB in accordance with 4.3.1.
B6	3101 or 4081	$R_{\Theta JL}$ = 250°C/W .375 inch (9.52 mm) lead length (non-surface mount) $R_{\Theta EC}$ = 100°C/W (UR suffix devices).

4.4.2.2 Group B inspection, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
B2	See 4.5.5	Preconditioning and delta's for temperature cycling
B2	1056	0°C to +100°C, 10 cycles, n = 22, c = 0.
B2	1051	-55°C to +150°C, 20 cycles, n = 22, c = 0.
B3	1038	HTRB, in accordance with 4.3.1.
B4	See 4.5.4.	
B6	1032	T_A = +150°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

Subgroup	Method	Condition
C2	See 4.5.5	Preconditioning and delta's for temperature cycling
C2	1056	0°C to +100°C, 15 cycles, n = 22, c = 0.
C2	1051	-55°C to +150°C, 20 cycles, n = 22, c = 0.
C2	2036	(Not applicable to surface mount devices); lead fatigue conditions: Test condition E; .062 inch (1.57 mm) lead restriction from case. Tension conditions: Test condition A; 4 pounds, 15 seconds.
C5	3101 or 4081	$R_{\Theta JEC}$, $R_{\Theta JSP}$ = 100°C/W (maximum). +25°C ≤ T_R ≤ +35°C, at T_H ≥ 25 s in still air. (See 4.5.3).
C5	3101 or 4081	$R_{\Theta JL}$ = 250°C/W (maximum) at .375 inches (9.52 mm) lead length. +25°C ≤ T_R ≤ +35°C, at T_H ≥ 25 s in still air. (See 4.5.3).
C6	1038	HTRB in accordance with 4.3.1.


4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IX of MIL-PRF-19500 appendix E and as specified herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein except, $Z_{\theta JX}$ need not be performed.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Steady-state operation life. This test shall be conducted with a half-sine wave of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall not be greater than 180 degrees nor less than 150 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

* 4.5.2 Effective carrier lifetime (τ_{CL}). This test shall be measured with the device installed in the test fixture, DESC Drawing C68001 using the test setup shown on figure 5 herein. Adjust the signal generator to 54 MHz. Adjust the sensitivity of the oscilloscope to 5 mV/cm (1N5711), 10mV/cm (1N6858), 20mV/cm (1N5712), and 50mV/cm (1N6857). With the device in the test fixture, adjust the output of the amplifier or VHF oscillator until the peak amplitude of the forward current is 5 cm as seen on the oscilloscope [5mA (1N5711), 10mA (1N6858), 20mA (1N5712), and 50mA (1N6857)].

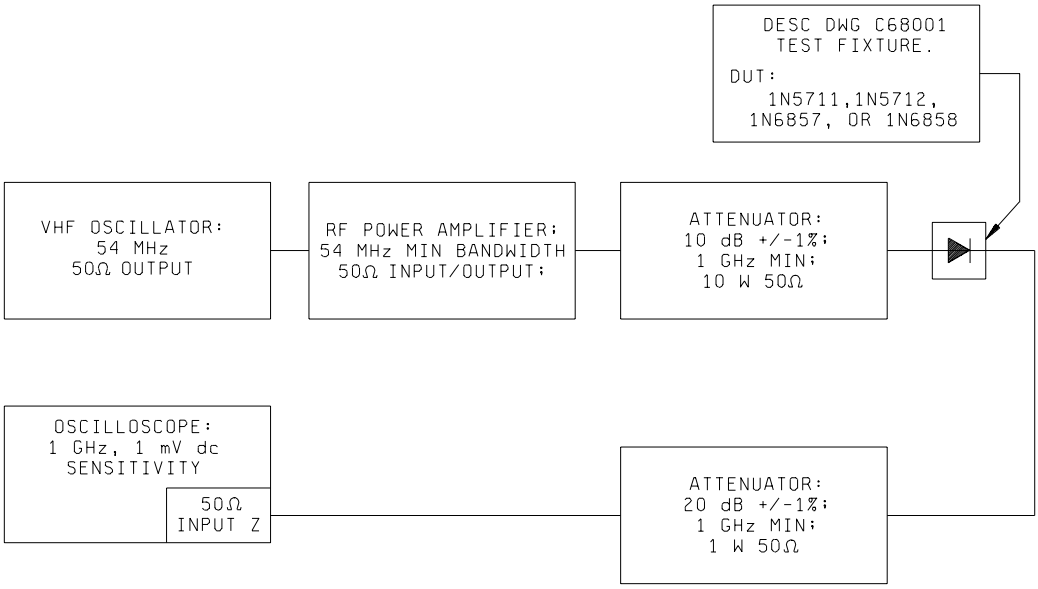

* FIGURE 5. Test setup for diode effective lifetime measurement.

Change the sensitivity of scope to 2 mV/cm (1N5711, 1N6858), 5mV/cm (1N5712), or 10mV/cm (1N6857). Under these conditions, the effective carrier lifetime is related to the amplitude designated as "τ_{CL} " shown on figure 6. This amplitude has the calibration of 200 ps/cm (1N5711), 100ps/cm (1N6858), 125ps/cm (1N5712), and 100ps/cm (1N6857).

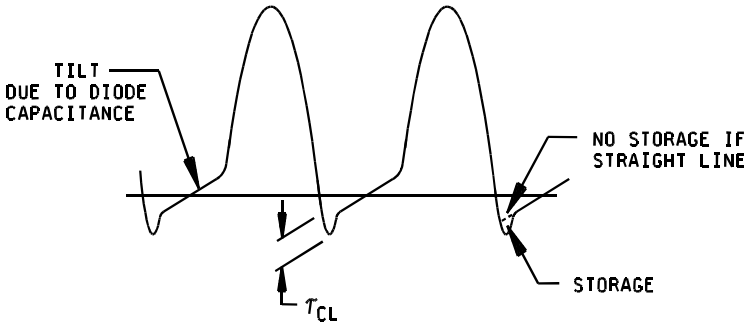


FIGURE 6. Oscilloscope display in diode effective lifetime measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.5.3 Thermal resistance. Thermal resistance measurement shall be in accordance with method 3101 or 4081 of MIL-STD-750. Forced moving air or draft shall not be permitted across the device during test. The maximum limit for $R_{\theta JL}$ under these test conditions shall be as shown in group E. The following conditions shall apply when using method 3101:

a. I_M..... 1 mA to 10 mA.

b. I_H ..... 25 mA to 100 mA.

c. t_H ..... 25 seconds minimum.

d. t_{MD} ..... 70 µs maximum.

4.5.3.1 Temperature reference point, leaded devices: LS = lead spacing = .375 inch (9.52 mm) as defined on figure 7.

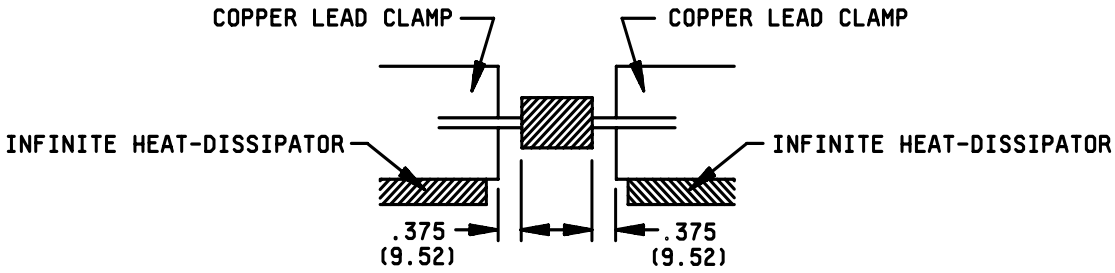


FIGURE 7. Mounting conditions.

4.5.4 Decap internal visual scribe and break. Scratch glass at cavity area with diamond scribe. Carefully snap open. Using 30X magnification, examine the area where die (or bonding material) are in contact with the plugs, verify metallurgical bonding area.

* 4.5.5 Preconditioning and deltas for temperature cycling.

a. Read and record I_{R1}, V_{F2}, and $Z_{\theta JX}$. Maintain device serialization throughout testing.

b. Immerse entire device into any suitable flux. Flux is used to prevent solder bridging across the terminations of device and to provide for a suitable contact needed for post electrical testing.

c. Immerse entire device in a horizontal position so that both terminations come in contact with the solder simultaneously. The device shall be immersed instantly and not gradually and held completely immersed in the solder for 5 +2, -0 seconds. No dwell time over the solder pot shall be permitted.

d. The device shall be allowed to return to ambient prior to cleaning. Remove residue flux from the terminations by dipping the parts in isopropyl alcohol or other suitable solvent.

e. Test devices to method 1056 and 1051 of MIL-STD-750 and in accordance with MIL-PRF-19500.

f. Read and record I_{R1}, V_{F2}, and $Z_{\theta JX}$, test subgroup 2 of table 1 herein.

g. Failure criteria: Subgroup 2 of table 1 herein. Calculate deltas between steps 4.5.5.a and 4.5.5.f, $\Delta I_{R1} \leq 100$ percent of initial reading or 25 nA whichever is greater, $\Delta V_F \pm 20$ mV, $\Delta Z_{\theta JX} \pm 10$ percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
1N5711-1, all packages						
Forward voltage	4011	I_F = 1 mA dc	V_{F1}		0.410	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F2}		1.0	V dc
Reverse current	4016	DC method; V_R = 50 V dc	I_{R1}		200	nA dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)1}$	70		V dc
Thermal impedance	3101	see 4.3.3	$Z_{\theta JX}$		40	°C/W
1N5712-1, all packages						
Forward voltage	4011	I_F = 1 mA dc	V_{F1}		0.410	V dc
Forward voltage	4011	I_F = 35 mA dc	V_{F2}		1.0	V dc
Reverse current	4016	DC method; V_R = 16 V dc	I_{R1}		150	nA dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)1}$	20		V dc
Thermal impedance	3101	see 4.3.3	$Z_{\theta JX}$		40	°C/W
1N6857-1, UR-1						
Forward voltage	4011	I_F = 1 mA dc	V_{F1}		0.350	V dc
Forward voltage	4011	I_F = 35 mA dc	V_{F2}		0.75	V dc
Reverse current	4016	DC method; V_R = 16 V dc	I_{R1}		150	nA dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)1}$	20		V dc
Thermal impedance	3101	see 4.3.3	$Z_{\theta JX}$		40	°C/W
1N6858-1, UR-1						
Forward voltage	4011	I_F = 1 mA dc	V_{F1}		0.360	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F2}		0.65	V dc
Reverse current	4016	DC method; V_R = 50 V dc	I_{R1}		200	nA dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)1}$	70		V dc
Thermal impedance	3101	see 4.3.3	$Z_{\theta JX}$		40	°C/W
Subgroup 3						
1N5711-1, all packages						
High temperature operation		T_A = +150°C				
Reverse current	4016	DC method; V_R = 50 V dc	I_{R2}		200	µA dc
Low temperature operation		T_A = -55°C				
Forward voltage	4011	I_F = 1 mA dc	V_{F3}		0.55	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F4}		1.0	V dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)2}$	70		V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 3 – Continued.						
1N5712-1, all packages High temperature operation		T_A = +150°C				
Reverse current	4016	DC method; V_R = 16 V dc	I_{R2}		150	µA dc
Low temperature operation		T_A = -55°C				
Forward voltage	4011	I_F = 1 mA dc	V_{F3}		0.55	V dc
Forward voltage	4011	I_F = 35 mA dc	V_{F4}		1.0	V dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)2}$	20		V dc
1N6857-1, UR-1 High temperature operation		T_A = +150°C			300	µA dc
Reverse current	4016	DC method; V_R = 16 V dc	I_{R2}			
Low temperature operation		T_A = -55°C				
Forward voltage	4011	I_F = 1 mA dc	V_{F3}		0.55	V dc
Forward voltage	4011	I_F = 35 mA dc	V_{F4}		1.0	V dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)2}$	20		V dc
1N6858-1, UR-1 High temperature operation		T_A = +150°C				
Reverse current	4016	DC method; V_R = 50 V dc	I_{R2}		400	µA dc
Low temperature operation		T_A = -55°C				
Forward voltage	4011	I_F = 1 mA dc	V_{F3}		0.55	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F4}		1.0	V dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)2}$	70		V dc
Subgroup 4						
Capacitance	4001	V_r = 0V dc; f = 1 MHz; V_{sig} = 50 mV(pk) maximum				
1N5711-1, 1N5712-1, and UB and UR			C		2.0	pF
1N6857-1, 1N6858-1 and UR					4.5	pF
Effective carrier lifetime (see 4.5.2) 2/		(See DESC drawing 68001)	τ_{CL}		100	ps
Subgroups 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.
2/ Effective carrier lifetime needs to be performed only one time per wafer lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

* TABLE II. Group E inspection (all quality levels) - for qualification only.

Inspection	MIL-STD-750		Qualification
	Method	Conditions	
Subgroup 1			22 devices, c = 0
Thermal shock	1056	500 cycles, -55°C to 100°C	
Temperature cycling (air to air)	1051	500 cycles, -55°C to 150°C	
Hermetic seal	1071		
Fine leak Gross leak			
Electrical measurements		See table I, subgroup 2 (V_{F1} and I_{R1})	
Subgroup 2			22 devices c = 0
Steady-state dc blocking life	1038	See 4.3.1, 1,000 hrs	
Electrical measurements		See table I, subgroup 2 (V_{F1} and I_{R1})	
Subgroup 3			
Not applicable			
Subgroup 4			
Thermal impedance curves		Each supplier shall submit their (typical) thermal impedance curves. In addition, test conditions and $Z_{\theta JX}$ limit shall be provided to the qualifying activity in the qualification report.	
Subgroup 5			
* Soldering heat	2031	Number of cycles = 1	n = 22
Electrical measurements		See table I, subgroup 2	
Subgroup 6			3 devices c = 0
ESD testing	1020		

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible ackaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of documents referenced (see 2.2.1).

c. Lead finish as specified (see 3.4.1).

d. Type designation and product assurance level.

e. Packaging. requirements (see 5.1).

6.3 Suppliers of die. The qualified die suppliers with the applicable letter version (e.g., JANHCA1N5711) will be identified on the QML.

JANC ordering information	
PIN	Manufacturer
	43611
1N5711-1 1N5712-1 1N6857-1 1N6858-1	JANHCA1N5711, JANKCA1N5711 JANHCA1N5712, JANKCA1N5712 JANHCA1N6857, JANKCA1N6857 JANHCA1N6858, JANKCA1N6858

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC-VQE, P.O. Box 3990, Columbus, OH 43216-5000.

6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, MC
Air Force - 19

Preparing activity:
DLA - CC

(Project 5961-2778)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/444G	2. DOCUMENT DATE 13 August 2003

3. **DOCUMENT TITLE** SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING, TYPES 1N5711-1, 1N5711UR-1, 1N5711UB, 1N5711UBCA, 1N5711UBD, 1N5711UBCC, 1N5712-1, 1N5712UR-1, 1N5712UB, 1N5712UBCA, 1N5712UBD, 1N5712UBCC, 1N6857-1, 1N6857UR-1, 1N6858-1, AND 1N6858UR-1, JAN, JANTX, JANTXV, JANS, JANHC, AND JANKC

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (PLEASE PRINT)	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) COMMERCIAL DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE Commercial DSN FAX EMAIL 614-692-0510 850-0510 614-692-6939 alan.barone@dla.mil
c. ADDRESS *(Include Zip Code)* Defense Supply Center Columbus ATTN: DSCC-VAC P.O. Box 3990 Columbus, OH 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703)767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.