The documentation and process conversion measures necessary to comply with this revision shall be completed by 11 June 2008.

INCH POUND

MIL-PRF-19500/478H
11 March 2008
SUPERSEDING
MIL-PRF-19500/478G
26 May 1997

* PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER, FAST RECOVERY, TYPES 1N5812, 1N5814, 1N5816, AND R VERSIONS, JAN, JANTX, JANTXV, JANHC, JANKC, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

* The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, fast recovery power rectifier diodes. Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500. Two product assurance levels are provided for die.

1.2 Physical dimensions. See figure 1 (DO-4) and figures 2, 3, 4, and 5 (unencapsulated die).


1.3 Maximum ratings.

Types (1)	V_R	V_{RWM}	I_O (1) T_C = +100°C	I_{FSM} t_p = 8.3 ms T_C = +100°C	t_{rr}
	V dc	V (pk)	A dc	A(pk)	ns
1N5812, R	50	50	20	400	35
1N5814, R	100	100	20	400	35
1N5816, R	150	150	20	400	35

(1) Derate linearly, 250 mA/°C from +100°C to +150°C and 300 mA/°C above +150°C.
Storage temperature: T_{STG} = -65°C to +175°C.
Operating temperature: T_J = -65°C to +175°C.
Barometric pressure reduced (altitude operation): 8 mm/Hg.
$R_{\theta JC}$ = 1.5°C/W maximum.

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

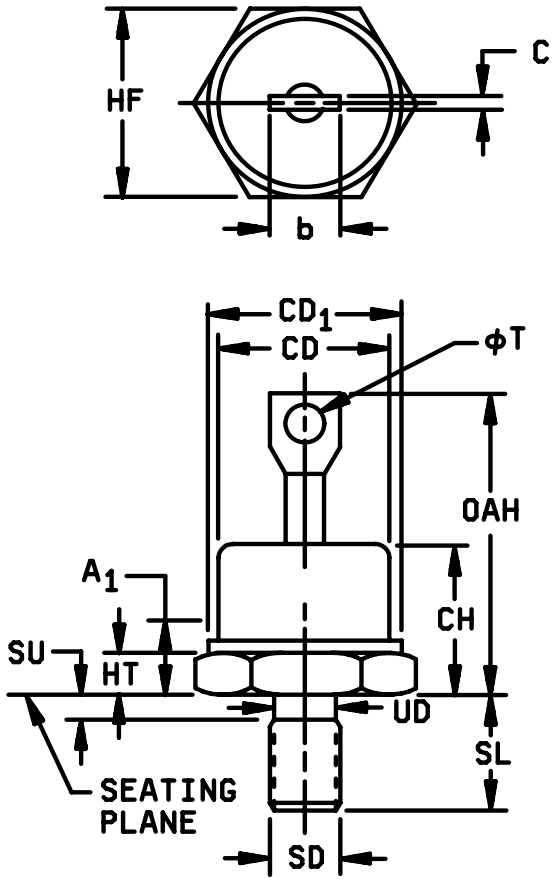


	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A_1		.250		6.35	
b		.250		6.35	3
C	.018	.065	0.46	1.65	
CD	.265	.424	6.74	10.77	
CD_1	.265	.437	6.74	11.10	
CH	.300	.405	7.62	10.28	
HF	.424	.437	10.77	11.10	
HT	.075	.175	1.91	4.44	
OAH	.600	.800	15.24	20.32	
SD					4, 6
SL	.422	.453	10.72	11.50	
SU		.078		1.98	5
øT	.066	.103	1.68	2.62	
UD	.163	.189	4.14	4.80	

NOTES:
1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only.
3. Angular orientation and contour of this terminal is undefined.
4. Pitch diameter .190-32 UNF-2A (coated) - .1697 (4.310 mm).
5. Length of incomplete or undercut threads of UD.
6. Anode for R suffix devices.
7. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 1. Physical dimensions (DO-4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

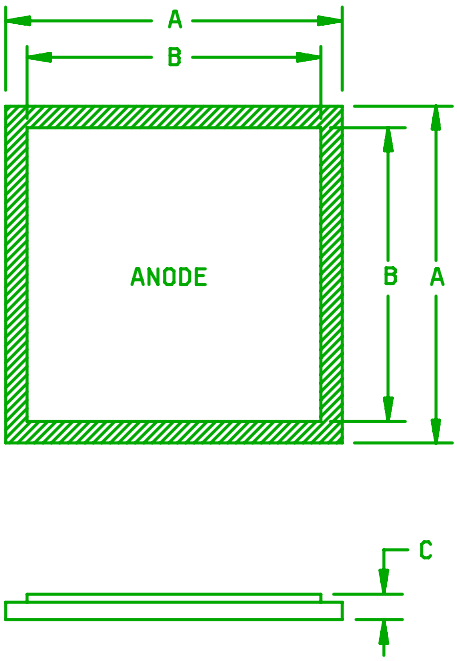


Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.130	.133	3.30	3.37
B	.114	.117	2.89	2.97
C	.009	.010	0.228	0.254

NOTES:
1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only.
3. The physical characteristics of the die are: Metallization {front (anode), back (cathode)} consists of: Ag thickness = 3,000 Å minimum, NI thickness = 1,500 Å minimum, Cr thickness = 800 Å minimum.
4. Requirements in accordance with MIL-PRF-19500 (appendix E) are performed in a DO-4 package (see 6.5).
5. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 2. Physical dimensions JANC die dimensions (A-version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

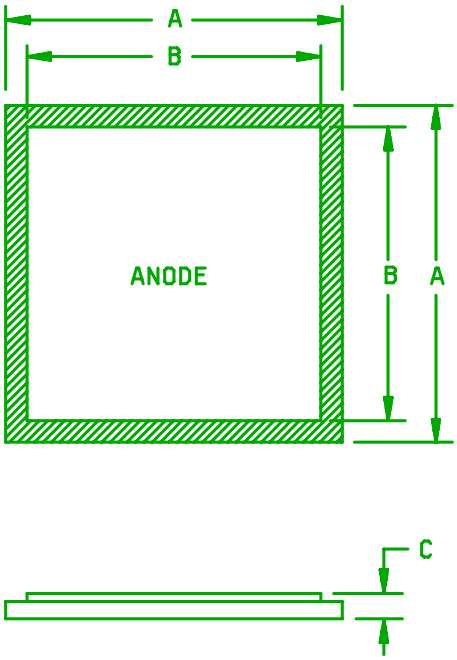


Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.130	.143	3.30	3.63
B	.114	.133	2.89	3.37
C	.009	.010	0.228	0.254

NOTES:
1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only.
3. The physical characteristics of the die are: Metallization {front (anode), back (cathode)} consists of: Ag thickness = 3,000 Å minimum, NI thickness = 1,500 Å minimum, Cr thickness = 800 Å minimum, optionally Ti thickness = 300 Å minimum.
4. Requirements in accordance with MIL-PRF-19500 (appendix H) are performed in a DO-4 package (see 6.5).
5. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 3. Physical dimensions JANC die dimensions (B-version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

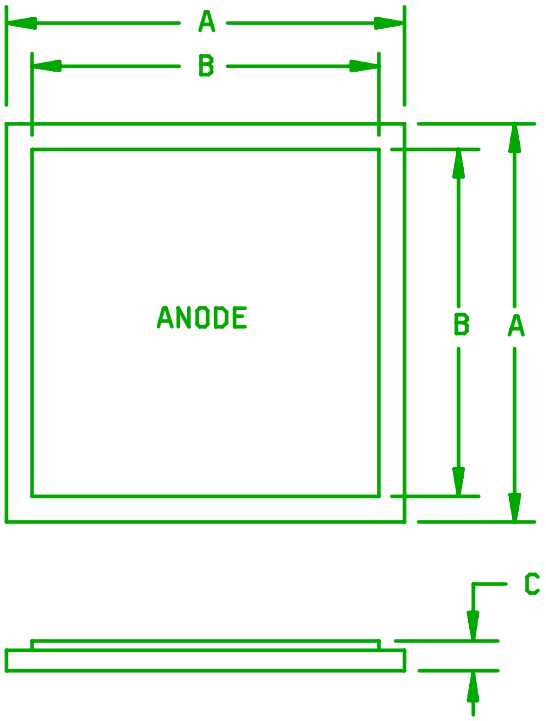


Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.152	.156	3.86	3.96
B	.126	.130	3.20	3.30
C	.008	.012	0.203	0.31

NOTES:
1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only.
3. The physical characteristics of the die are: Metallization (front (anode)), consists of: AL thickness = 60,000 Å minimum, (back, (cathode)) consists of: AU thickness = 2,500 Å minimum.
4. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 4. Physical dimensions JANC (JANHC and JANKC) die dimensions (C-version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

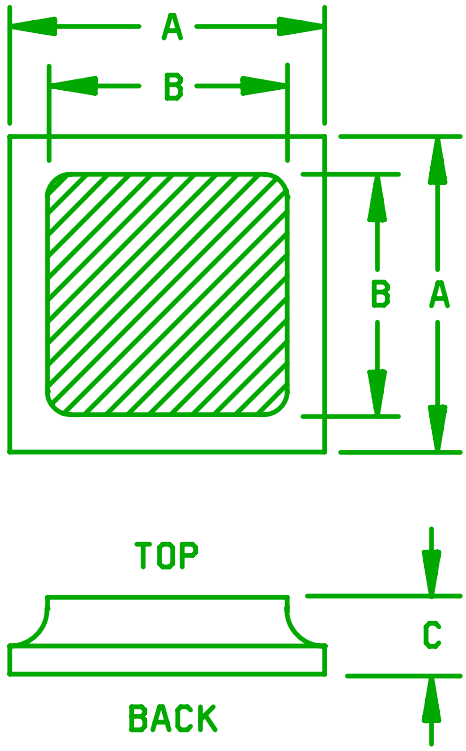

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.136	.142	3.45	3.61
B	.117	.123	2.97	3.12
C	.007	.013	0.18	0.33

NOTES:
1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only.
3. The metallization consists of:
   D version: front (anode) - aluminum; back (cathode) - gold.
   E version: front (anode) - aluminum; back (cathode) - silver.
   F version: front (anode) - silver; back (cathode) - silver.
4. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 5. Physical dimensions JANC (JANHC and JANKC) die dimensions (D, E, and F - versions).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

* 2. APPLICABLE DOCUMENTS

* 2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

* 2.2 Government documents.

* 2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil.or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

* 3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

* 3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

* 3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 for DO-4 and figures 2, 3, 4, and 5 (JANHC and JANKC).

* 3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.5.1 Polarity. Polarity shall be in accordance with MIL-PRF-19500. The reversed units shall also be marked with an R following the last digit in the type number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

* 3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3 and table I herein.

* 3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

* 3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

* 4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table xx tests, the tests specified in table xx herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification

4.2.2 Screening JANHC and JANKC. Screening shall be in accordance with appendix G of MIL-PRF-19500. As a minimum, die shall be 100 percent probed in accordance with table I, subgroup 2 herein for I_{R1} and $V_{(BR)1}$ only. V_{F1} and V_{F2} shall be performed on a sample of ten pieces mounted on a DO-4 (or equivalent) package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

* 4.3 Screening (JANS, JANTXV, and JANTX levels only). Screening shall be in accordance with appendix E, table E-IV of MIL-PRF-19500, and as specified herein. Specified electrical measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see appendix E, table E-IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTXV and JANTX level
(1) 3b	Surge, see 4.3.1.	Surge, see 4.3.1.
(2) 3c	Thermal impedance (see 4.3.2 and 4.4.1).	Thermal impedance (see 4.3.2 and 4.4.1).
4	Not applicable.	Not applicable.
(3) 9	V_{F2} and I_{R1}.	Not applicable.
10	Method 1038 of MIL-STD-750, condition A, t = 96 hours.	Not applicable.
(3) 11	Subgroup 2 of table I herein; V_{F2} and I_{R1}; $\Delta V_{F2} \leq \pm 0.05$ V (pk)dc; ΔI_{R1} ±2.5 µA dc or +100 percent of initial value whichever is greater.	V_{F2} and I_{R1}.
12	Burn-in, see 4.3.3, method 1038 of MIL-STD-750, test condition B.	Burn-in, see 4.3.3, method 1038 of MIL-STD-750, test condition A.
(3) 13	Subgroups 2 and 3 of table I herein; $\Delta I_{R1} \leq 2.5$ µA dc or 100 percent of initial value, whichever is greater. $\Delta V_{F2} \leq +0.05$ V dc (pk) change from initial value.	Subgroup 2 of table I herein; $\Delta I_{R1} \leq 2.5$ µA dc or 100 percent of initial value, whichever is greater. $\Delta V_{F2} \leq +0.05$ V dc (pk) change from initial value.

(1) Surge shall precede thermal response. These tests shall be performed anytime after screen 3 and before screen 10.
(2) Thermal impedance need not be repeated.
(3) I_{R1} measurement shall not be indicative of an open condition.

4.3.1 Surge current. Surge current, see method 4066 of MIL-STD-750.

a. I_{FSM} = 400 A, 6 surges, t_p = 8.3 ms or rectangular pulse of equivalent I_{rms}, 3 surges.

b. I_O = 0 A, V_{RMS} = 0 V, duty factor 1 percent minimum T_A = +25°C.

4.3.2 Thermal impedance $Z_{\theta JX}$ measurements for screening. The $Z_{\theta JX}$ measurements shall be performed in accordance with method 3101 of MIL-STD-750. The maximum limit (not to exceed the group A, subgroup 2 limit) for $Z_{\theta JX}$ in screening (appendix E, table IV of MIL-PRF-19500) shall be derived by each vendor by means of statistical process control. When the process has exhibited control and capability, the capability data shall be used to establish the fixed screening limit. In addition to screening, once a fixed limit has been established, monitor all future sealing lots using a random five piece sample from each lot to be plotted on the applicable X, R chart. If a lot exhibits an out of control condition, the entire lot shall be removed from the line and held for Engineering evaluation and disposition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

* 4.3.3 Burn-in. Burn-in conditions for all quality levels are as follows: method 1038 of MIL-STD-750, T_C = +125°C; V_R = 0.8 to 0.85 rated V_R dc (see 1.3).

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with appendix E, table E-V of MIL-PRF-19500 and table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection:

a. $I_H \geq$ rated I_O.

b. $t_H \leq 250$ ms.

c. 10 mA $\leq I_M \leq$ 100 mA.

d. t_{MD} = 250 µs (maximum).

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, tables E-VIa (JANS) and E-VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps and footnotes of table III herein.

4.4.2.1 Group B inspection, appendix E, table E-VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	4066	T_C = +100°C; $t_p \leq$ 8.3 ms; V_R = rated V_R (see 1.3) six 1/120 s surges; 1 surge/minute maximum. I_{FSM} = 400 A dc, I_O = 20 A dc.
B4	1037	2,000 cycles, 25 percent rated $I_O \leq I_O$ applied $\leq$ rated I_O (see 4.5.2).
B5	1027	I_F = 20 A avg at T_A = +125°C, for 340 hours, or adjusted as required by the chosen T_A to give an average lot T_J = +175°C; f = 60 Hz $V_R = V_{RWM}$ (pk) (see 1.3).
B6	4081 or 3101	$R_{\theta JC}$ = 1.5°C/W; $t_H \geq$ 20 seconds; heating current (I_H) $\geq$ rated I_O; $t_{MD} \leq$ 250 µs; measurement current 10 mA $\leq I_M \leq$ 100 mA.
B7	1018	Only to be performed when organics or silicones are present in the device package; n = 3, c = 0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

4.4.2.2 Group B inspection, appendix E, table E-VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
B2	4066	T_C = +100°C; $t_p \leq$ 8.3 ms; V_R = rated V_R (see 1.3) six 1/120 s surges; 1 surge/minute maximum. I_{FSM} = 400 A dc, I_O = 20 A dc.
B3	1036	$I_F \geq 0.25\ I_O$ (see 4.5.2) 2,000 cycles.
B5		Not applicable.
B6	1032	T_C = +175°C.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E. table E-VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table III herein.

Subgroup	Method	Condition
C2	2036	Terminal strength: Test condition A; weight = 10 pounds; t = 15 s. Bending stress: Test condition F, method B; weight = 3 pounds; t = 15 s. Lead torque: Test condition D1; torque = 10 ounce-inches; t = 15 s. Stud torque: Test condition D2; torque = 10 pound-inches; t = 15 s.
C6	1036	$I_F \geq 0.25\ I_O$ (see 4.5.2); 6,000 cycles.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 DC intermittent operation life. A cycle shall consist of an "on" period, when forward current is applied suddenly, not gradually, to the device for the time necessary to achieve an increase (delta) case temperature of +85°C +15°C, -5°C followed by an "off" period, when the current is suddenly removed for cooling, the case through a similar delta temperature. Auxiliary (forced) cooling is permitted during the "off" period only. Forward current and "on" time, within specific limits, and "off" time may be adjusted to achieve the delta case temperature. Heat sinks shall only be used if and to the degree necessary to maintain test samples within the desired delta temperature tolerance. The heating time shall be such that 30 s $\leq t_{heating} \leq$ 180 s. The forward current may be steady-state dc, full-wave rectified dc, or the equivalent half-sine wave dc, of the specified value. The test duration shall be the specified number of cycles. Within the time interval of 50 cycles before and 500 cycles after the termination of the test, the sample units shall be removed from the specified test conditions and allowed to reach room ambient conditions. Specified end-point measurements for qualification and quality conformance inspections shall be completed within 96 hours after removal of sample units from the specified test conditions. Additional readings may be taken at the discretion of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

4.5.3 Reverse recovery time. The reverse recovery time shall be measured in the circuit of figure 6 or equivalent. Care should be exercised to minimize stray inductances in the test circuit and to ensure that the total resistance of the reverse current loop can be adjusted sufficiently low that more than 1 ampere will flow if not blocked by the diode being tested. The circuit and the pulsed reverse voltage source shall be adjusted to achieve the following characteristics of the waveform.

a. The di/dt shall be the specified value between the forward 0.5 ampere point and the reverse 0.2 ampere point.

b. The peak reverse current, I_R shall be adjusted to 1.0 ampere prior to measuring the device.

The reverse-recovery time shall then be determined from the current waveform as shown on figure 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Thermal impedance	3101	See 4.3.2	$Z_{\theta JX}$			°C/W
Forward voltage	4011	Duty cycle ≤ 2 percent (pulsed see 4.5.1); tp ≤ 8.3 ms				
		I_F = 10 A	VF1		.860	V
		I_F = 20 A	VF2		.950	V
Reverse current	4016	DC method; V_R = rated V_R (see 1.3)	I_{R1}		10	µA
Breakdown voltage	4021	I_R = 100 µA	$V_{(BR)1}$			
1N5812, 1N5812R				60		V
1N5814, 1N5814R				110		V
1N5816, 1N5816R				160		V
Subgroup 3						
High temperature operation		T_C = +100°C				
Reverse current	4016	DC method, V_R = rated V_R; (see 1.3)	I_{R2}		1.00	mA
Forward voltage	4011	I_{FM} = 10 A, duty cycle ≤ 2 percent (pulsed); t_p ≤ 8.3 ms	V_{F3}		.780	V
Low temperature operation		T_A = -65°C				
Forward voltage	4011	I_{FM} = 10 A, duty cycle ≤ 2 percent (pulsed); t_p ≤ 8.3 ms	V_{F4}		1.05	V

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3 –Continued						
Breakdown voltage	4021	I_R = 100 μA	$V_{(BR)2}$			
1N5812, 1N5812R				50		V
1N5814, 1N5814R				100		V
1N5816, 1N5816R				150		V
Subgroup 4						
Reverse recovery time	4031	Test condition B4 $I_F = I_R$ = 1 A (pk) $I_{(REC)}$ = 0.1 A; di/dt = 85 A/μs minimum; (see 4.5.3)	t_{rr}		35	ns
Junction capacitance	4001	V_R = 10 V, f = 1 MHz V_{SIG} = 50 mV (p-p) maximum	C_J		300	pF
Forward recovery voltage	4026	$t_P \geq 20$ ns, t_r = 8 ns; I_F = 1,000 mA	V_{FR}		2.2	V (pk)
Forward recovery time	4026	I_F = 1,000 mA	t_{fr}		15	ns
Subgroups 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

* TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			45 devices c = 0
Thermal shock (glass strain)	1056	0°C to +100°C, 100 cycles.	
Electrical measurements		See table III, steps 1, 2, 3, and 4.	
Subgroup 2			22 devices c = 0
Steady-state dc blocking life	1038	Test condition A, except in accordance with 4.3.3; 1,000 hours.	
Electrical measurements		See table III, steps 1 and 2.	
Subgroup 3			
Not applicable			
Subgroup 4			
Thermal impedance curves		See MIL-PRF-19500.	
Subgroup 5			
Not applicable			


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

* TABLE III. Groups A, B, C, and E electrical end-point measurements. 1/ 2/ 3/ 4/ 5/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Forward voltage	4011	I_F = 10 A (pk) pulsed; $t_p \leq$ 8.3 ms duty cycle = 2 percent maximum.	V_{F1}		.860	V (pk)
2.	Reverse current	4016	DC method, V_R = rated V_R (see 1.3)	I_{R1}		10	µA dc
3.	Thermal impedance	3101	See 4.3.2			1.35	°C/W
6/ 4.	Reverse recovery time	4031	See table I, subgroup 4 herein.	t_{rr}		1.5	ns

1/ Devices which exceed table I, subgroup 2 (group A) limits for this test shall not be accepted.
2/ The electrical measurements for group B inspections in table E-VIa (JANS) of MIL-PRF-19500 are as follows:
   a. Subgroup 3, table III herein, steps 1, 2, and 3.
   b. Subgroup 4, table III herein, steps 1, 2, 3, and 4.
   c. Subgroup 5, table III herein, steps 1, 2, 3, and 4.
3/ The electrical measurements for group B inspections in table E-VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 are as follows:
   a. Subgroup 2, see table III herein, steps 1, 2, 3, and 4.
   b. Subgroup 3, table III herein, steps 1, 2, and 4.
   c. Subgroup 6, table III herein, steps 1 and 2.
4/ The electrical measurements for group C inspections in table E-VII of MIL-PRF-19500 are as follows:
   a. Subgroup 2, table III, steps 1 and 2.
   b. Subgroup 6, table III, steps 1, 2, and 4.
5/ The electrical measurements for group E inspections in table E-IX of MIL-PRF-19500 are as follows
   a. Subgroup 1, see table III, steps 1, 2, 3, and 4.
   b. Subgroup 2, see table III, steps 1 and 2.
6/ Step 6 applies to irradiated devices only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

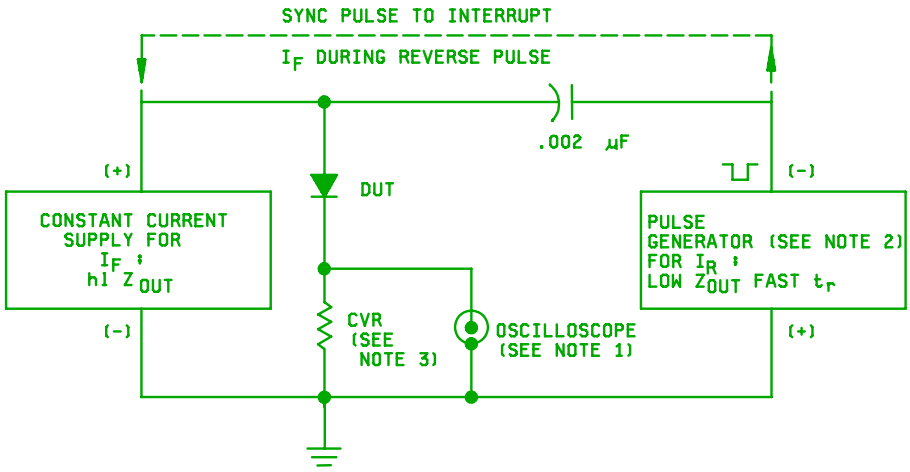

NOTES:

1. Oscilloscope: Rise time ≤ 3 ns; input impedance = 50 ohms minimum.
2. Pulse generator: Rise time ≤ 8 ns; source impedance 50 ohms maximum. (Tektronix 109, or equal).
3. Current viewing resistor: Noninductive coaxial type with resistance matched to pulse generator impedance.
   A 50-ohm, 40 ns charge line may be used.

FIGURE 6. Reverse recovery time test circuit.

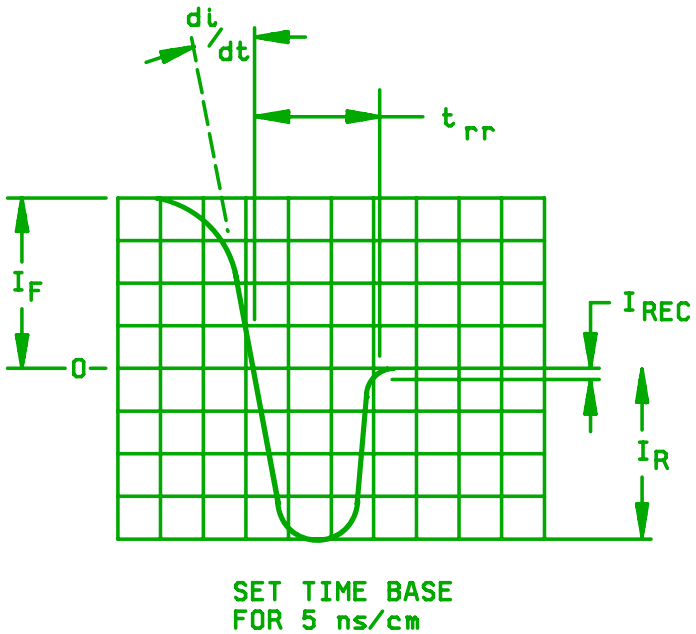


FIGURE 7. Reverse recovery time characteristic waveform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

* (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

* 6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

* 6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC/VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.

6.4 Suppliers of JANC (JANHC and JANKC) die. The qualified JANHC and JANKC suppliers with the applicable letter version (example, JANHCA1N5812) will be identified on the QPL.

JANHC and JANKC ordering information (1)						
PIN	Manufacturer					
	59377	11961	33178	12969	12969	12969
1N5812	JANHCA1N5812	JANHCB1N5812	JANHCC1N5812	JANHCD1N5812	JANHCE1N5812	JANHCF1N5812
1N5814	JANHCA1N5814	JANHCB1N5814	JANHCC1N5814	JANHCD1N5814	JANHCE1N5814	JANHCF1N5814
1N5816	JANHCA1N5816	JANHCB1N5816	JANHCC1N5816	JANHCD1N5816	JANHCE1N5816	JANHCF1N5816
Figure number	2	3	4	5	5	5

(1) For JANKC product assurance level, replace the "JANHC" prefix with "JANKC"."

6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, MC
Air Force - 19, 99
NASA - NA

(Project 5961-2007-108)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:22Z
Check the source to verify that this is the current version before use.