The documentation and process conversion measures necessary to comply with this revision shall be completed by: 7 December 2018.

INCH-POUND

MIL-PRF-19500/642E
6 June 2018
SUPERSEDING
MIL-PRF-19500/642D
24 August 2007

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER,
DUAL, COMMON CATHODE OR ANODE CENTER TAP, ULTRAFAST,
CASE MOUNT THROUGH HOLE PACKAGE, STANDARD AND REVERSE POLARITY,
TYPES 1N6762 THROUGH 1N6765, QUALITY LEVELS JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, dual ultrafast, power rectifier diodes in a center-tap configuration. Four levels of product assurance (JAN, JANTX, JANTXV and JANS) are provided for each device type as specified in MIL-PRF-19500.

1.2 Package outline. The device package for the encapsulated device types is a TO-254AA in accordance with figure 1.

1.3 Maximum ratings.

| Types | $V_{RWM}$ (1) $I_D$ = 10 µA dc | $I_F$ (1) (2) $T_C$ =+100°C | $I_{FSM}$ (1) tp= 8.3 ms | $R_{\theta JC}$ (1) | $R_{\theta JA}$ (1) | $T_{STG}$ and $T_J$ |
|---|---|---|---|---|---|---|
| | V dc | A dc | A(pk) | °C/W | °C/W | °C |
| 1N6762, 1N6762R | 50 | 12 | 165 | 2.0 | 40 | -65 to +150 |
| 1N6763, 1N6763R | 100 | 12 | 165 | 2.0 | 40 | |
| 1N6764, 1N6764R | 150 | 12 | 165 | 2.0 | 40 | |
| 1N6765, 1N6765R | 200 | 12 | 165 | 2.0 | 40 | |

(1) Each individual diode.
(2) Derate at 240 mA/°C above $T_C$ = +100°C.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, characteristics are each diode at +25°C.

| Types | $V_{F1}$ $I_F$ = 6 A dc | $V_{F2}$ $I_F$ =12 A dc | $I_{R1}$ (see 1.3) $V_R$ = 0.8 $V_{RWM}$ | $I_{R2}$ (see 1.3) $V_R$ = 0.8 $V_{RWM}$ $T_C$ = +100°C | trr | $C_J$ $V_R$ = 5 V f = 1 MHz |
|---|---|---|---|---|---|---|
| | V dc | V dc | µA dc | µA dc | ns | pF |
| 1N6762, 1N6762R | 0.95 | 1.05 | 10 | 500 | 35 | 300 |
| 1N6763, 1N6763R | 0.95 | 1.05 | 10 | 500 | 35 | 300 |
| 1N6764, 1N6764R | 0.95 | 1.05 | 10 | 500 | 35 | 300 |
| 1N6765, 1N6765R | 0.95 | 1.05 | 10 | 500 | 35 | 300 |

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", "JANTXV", and "JANS".

1.5.2 Device type. The designation system for the devices covered by this specification sheet is as follows.

1.5.2.1 First number and first letter symbols. The devices of this specification sheet use the first number and letter symbols "1N".

1.5.2.2 Second number symbols. The second number symbols for the devices covered by this specification sheet are as follows: "6762", "6763", "6764", and "6765".


1.5.3 Suffix symbols. The following suffix symbol(s) are incorporated into the PINs for this specification sheet.

| | |
|---|---|
| | A blank suffix indicates a standard polarity package configurations as shown on figure 1. |
| R | An R suffix indicates reverse polarity packaging of the diode. |

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

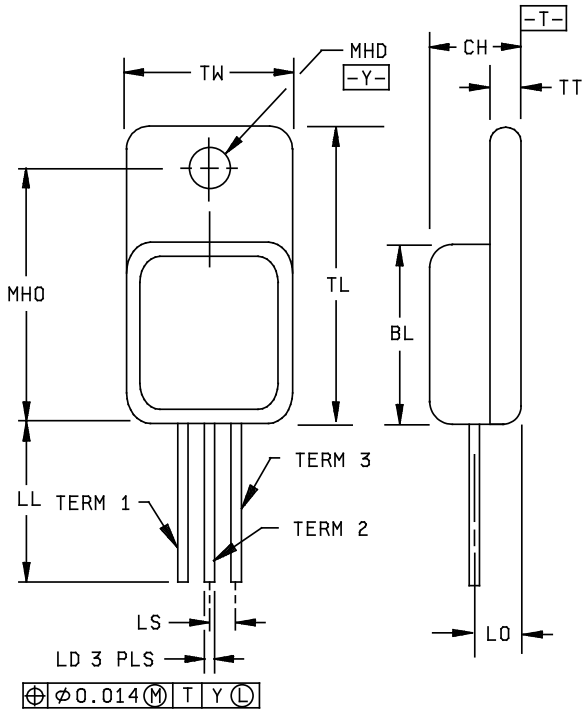



| Dimensions | | | | |
|---|---|---|---|---|
| Symbol | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| BL | .535 | .545 | 13.59 | 13.84 |
| CH | .249 | .260 | 6.32 | 6.60 |
| LD | .035 | .045 | 0.89 | 1.14 |
| LL | .510 | .570 | 12.95 | 14.48 |
| LO | .150 typ | | 3.81 typ | |
| LS | .150 bsc | | 3.81 bsc | |
| MHD | .139 | .149 | 3.53 | 3.78 |
| MHO | .665 | .685 | 16.89 | 17.40 |
| TL | .790 | .800 | 20.07 | 20.32 |
| TT | .040 | .050 | 1.02 | 1.27 |
| TW | .535 | .545 | 13.59 | 13.84 |

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. All terminals are isolated from case.
3. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.


SCHEMATIC

1N6762, 1N6763, 1N6764, 1N6765




| Terminal | Description |
|---|---|
| 1 | Anode 1 |
| 2 | Cathode |
| 3 | Anode 2 |

1N6762R, 1N6763R, 1N6764R, 1N6765R




| Terminal | Description |
|---|---|
| 1 | Cathode 1 |
| 2 | Anode |
| 3 | Cathode 2 |

FIGURE 1. Physical dimensions and configuration (TO-254AA, isolated).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods For Semiconductor Devices.

(Copies of these documents are available online at http://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Polarity. Polarity and terminal configuration shall be in accordance with figure 1 herein.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

3.6 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.7 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E inspection. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (quality levels JANTX, JANTXV, and JANS only). Screening shall be in accordance with appendix E, table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen | Measurement | |
|---|---|---|
| | JANS level | JANTX and JANTXV levels |
| 3c (1) | Thermal impedance (see 4.3.2) | Thermal impedance (see 4.3.2) |
| 9 and 10 | Not applicable | Not applicable |
| 11 | $I_{R1}$ and $V_{F1}$ | $I_{R1}$ and $V_{F1}$ |
| 12 | See 4.3.1, t = 240 hours | See 4.3.1, t = 48 hours |
| 13 | Subgroups 2 and 3 of table I herein; $\Delta I_{R1}$ ≤ 100 percent of initial value or ±2.5 µA, whichever is greater; $\Delta V_{F1}$ ≤ ±100 mV. | Subgroup 2 of table I herein; $\Delta I_{R1}$ ≤ 100 percent of initial value or ±2.5 µA whichever is greater; $\Delta V_{F1}$ ≤ ±100 mV. |

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3a, JANTX and JANTXV levels do not need to be repeated in screening requirements.

4.3.1 Power burn-in conditions. The power burn-in of devices shall be performed in accordance with condition A of method 1038 of MIL-STD-750. The power burn-in conditions shall be as follows: $T_C$ = +125°C; $V_R$ = 0.8 of rated $V_{RWM}$ (see 1.3).

4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081 of MIL-STD-750, using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{SW}$, ($V_C$ and $V_H$ where appropriate). Measurement delay time ($t_{MD}$) = 35 µs max. See table II, subgroup 4 herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I, herein. Delta measurements shall be in accordance with the applicable steps of table III herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table E-VIA (JANS) and table E-VIB (JAN, JANTX and JANTXV) of MIL-PRF-19500 and as follows. Delta measurements shall be in accordance with the applicable steps of table III herein.

4.4.2.1 Quality level JANS (table E-VIA of MIL-PRF-19500).

| Subgroup | Method | Condition |
|---|---|---|
| B4 | 1037 | $I_F$ or $I_O$ = 1.25 A to 10 A; $\Delta T_J$ = +85°C minimum, for 2,000 cycles minimum. |

4.4.2.2 Quality levels JAN, JANTX and JANTXV (table E-VIB of MIL-PRF-19500).

| Subgroup | Method | Condition |
|---|---|---|
| B3 | 1037 | $I_F$ or $I_O$ = 1.25 A to 10 A; $\Delta T_J$ = +85°C minimum, for 2,000 cycles minimum. For irradiated devices, include $t_{rr}$ as an end-point measurement. |
| B5 | 4081 | $R_{\theta JC}$ (maximum) = 2.0°C/W. |

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table E-VII of MIL-PRF-19500 and as follows. Delta measurements shall be in accordance with the applicable steps of table III herein.

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 2036 | Test condition A, 5 pounds (2.27 Kg), t = 15 seconds ±3 seconds. |
| C5 | | Not applicable. |
| C6 | 1037 | $I_F$ or $I_O$ = 1.25 A to 10 A; $\Delta T_J$ = +85°C minimum, for 6,000 cycles minimum. For irradiated devices, include $t_{rr}$ as an end-point measurement. |

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table E-IX of MIL-PRF-19500 and table II. Delta measurements shall be in accordance with the applicable steps and footnotes of table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. The conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection. 1/ 2/

| Inspection | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance | 3101 | See 4.3.2 | $Z_{\theta JX}$ | | | °C/W |
| Breakdown voltage | 4022 | $I_R$ = 10 µA dc, pulsed | $V_{BR}$ | | | V dc |
| 1N6762, 1N6762R | | | | 50 | | |
| 1N6763, 1N6763R | | | | 100 | | |
| 1N6764, 1N6764R | | | | 150 | | |
| 1N6765, 1N6765R | | | | 200 | | |
| Forward voltage | 4011 | Test condition B<br>$I_F$ = 6 A dc, pulsed 3/<br>$I_F$ = 12 A dc, pulsed 3/ | $V_{F1}$<br>$V_{F2}$ | | 0.95<br>1.05 | V dc<br>V dc |
| Reverse leakage current | 4016 | DC method; pulsed<br>$V_R$ = 0.8 of $V_{RWM}$ (see 1.3) | $I_{R1}$ | | 10 | µA dc |
| Subgroup 3 | | | | | | |
| High temperature operation: | | $T_C$ = +100°C | | | | |
| Reverse leakage current | 4016 | DC method; pulsed<br>$V_R$ = 0.8 of $V_{RWM}$ (see 1.3) | $I_{R2}$ | | 500 | µA dc |
| Low temperature operation: | | $T_A$ = -55°C | | | | |
| Forward voltage | 4011 | Test condition B<br>$I_F$ = 12 A dc, pulsed 3/ | $V_{F3}$ | | 1.25 | V dc |
| Subgroup 4 | | | | | | |
| Scope display evaluation | 4023 | 4/ | | | | |
| Reverse recovery time measurements | 4031 | Condition B1 | $t_{rr}$ | | 35 | ns |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued. 1/ 2/

| Inspection | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroups 5 and 6 | | | | | | |
| Not applicable | | | | | | |
| Subgroup 7 | | | | | | |
| Junction capacitance | 4001 | $V_R$ = 5 V dc; f = 1.0 MHz | $C_J$ | | 300 | pF |

1/ For sampling plan, see MIL-PRF-19500.
2/ Each individual diode.
3/ Pulse test: Pulse width = 300 µs, duty cycle ≤ 2 percent.
4/ The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 50 to 100 µA/division and 50 to 100 V/division. Reverse current over the knee shall be at least 500 µA. Each device may exhibit a slightly rounded characteristic and any discontinuity or dynamic instability of the trace shall be cause for rejection.

TABLE II. Group E inspection (all quality levels) for qualification only.

| Inspection | MIL-STD-750 | | Sampling plan |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices<br>c = 0 |
| Temperature cycling | 1051 | 500 cycles | |
| Hermetic seal<br>Fine leak<br>Gross leak | 1071 | | |
| Electrical measurements | | See table III herein, steps 1 and 2. | |
| Subgroup 2 | | | 45 devices<br>c = 0 |
| Steady-state reverse bias | 1038 | Test condition A; t = 1,000 hours, $T_C$ = +125°C<br>$V_R$ = 0.8 of rated $V_{RWM}$ (see 1.3) | |
| Electrical measurements | | See table III herein, steps 1 and 2. For irradiated devices, include $t_{rr}$ as an end-point measurement. | |
| Subgroup 4 | | | |
| Thermal impedance curves | | See MIL-PRF-19500. | Sample size<br>N/A |
| Subgroup 5 | | | |
| Not applicable | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

TABLE III. Groups B, C, and E delta measurements. 1/ 2/ 3/ 4/

| Step | Inspection | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|
| | | Method | Conditions | | Min | Max | |
| 1 | Forward voltage | 4011 | $I_F$ = 12 A dc pulsed | $\Delta V_{F2}$ | | ±100 mV dc from initial reading | |
| 2 | Reverse leakage current | 4016 | DC method, pulsed $V_R$ = 80 percent rated $V_R$ (see 1.3) | $\Delta I_{R1}$ | | 100-percent of initial value or ±2.5 µA dc which-ever is greater. | |

1/ The electrical measurements for table E-VIA (JANS) of MIL-PRF-19500 are as follows:
   a. Subgroup 4, see table III herein, steps 1 and 2.
   b. Subgroup 5, see table III herein, steps 1 and 2.

2/ The electrical measurements for table E-VIB (JAN, JANTX and JANTXV) of MIL-PRF-19500 are as follows:
   a. Subgroup 2, see table III herein, steps 1 and 2.
   b. Subgroup 3, see table III herein, steps 1 and 2.

3/ The electrical measurements for table E-VII of MIL-PRF-19500 are as follows:
   a. Subgroup 6, see table III herein, steps 1 and 2 for all levels.

4/ The electrical measurements for group C table E-IX of MIL-PRF-19500 are as follows:
   a. Subgroup 1, see table III herein, steps 1 and 2.

## 5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).


d. The complete PIN, see 1.5 and 6.5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at http://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

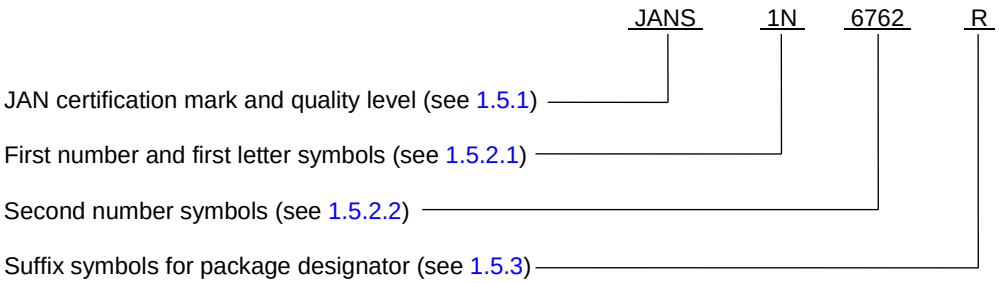


6.5 List of PINs. The following is a list of possible PINs available for encapsulated devices covered by this specification sheet.

| JAN quality level | JANTX quality level | JANTXV quality level | JANS quality level |
|---|---|---|---|
| JAN1N6762 | JANTX1N6762 | JANTXV1N6762 | JANS1N6762 |
| JAN1N6762R | JANTX1N6762R | JANTXV1N6762R | JANS1N6762R |
| JAN1N6763 | JANTX1N6763 | JANTXV1N6763 | JANS1N6763 |
| JAN1N6763R | JANTX1N6763R | JANTXV1N676R3 | JANS1N6763R |
| JAN1N6764 | JANTX1N6764 | JANTXV1N6764 | JANS1N6764 |
| JAN1N6764R | JANTX1N6764R | JANTXV1N6764R | JANS1N6764R |
| JAN1N6765 | JANTX1N6765 | JANTXV1N6765 | JANS1N6765 |
| JAN1N6765R | JANTX1N6765R | JANTXV1N6765R | JANS1N6765R |

6.6 Cross reference list. Parts covered by this specification may be used to replace the following commercial PINs:

| Preferred types | Commercial types |
|---|---|
| JANTX1N6762, JANTX1N6762R<br>JANTX1N6763, JANTX1N6763R<br>JANTX1N6764, JANTX1N6764R<br>JANTX1N6765, JANTX1N6765R | 1N6762, 1N6762R<br>1N6763, 1N6763R<br>1N6764, 1N6764R<br>1N6765, 1N6765R |
| JANTXV1N6762, JANTXV1N6762R<br>JANTXV1N6763, JANTXV1N6763R<br>JANTXV1N6764, JANTXV1N6764R<br>JANTXV1N6765, JANTXV1N6765R | 1N6762, 1N6762R<br>1N6763, 1N6763R<br>1N6764, 1N6764R<br>1N6765, 1N6765R |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army – CR
Navy – EC
Air Force – 85
NASA – NA
DLA – CC

Review activities:
Air Force – 99

Preparing activity:
DLA – CC

(Project 5961–2018–045)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:26Z
Check the source to verify that this is the current version before use.