MIL-E-1/464B
25 September 1968
SUPERSEDING
MIL-E-1/464A
21 January 1959

MILITARY SPECIFICATION SHEET

ELECTRON TUBE RECEIVING

TYPE 5704

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

DESCRIPTION: Diode, subminiature, VHF

Outline		See figure 1
Base		
Envelope		
Cathode	---	Coated unipotential

Base connections:

Pin No.	---		1	2	3	4
Element	---	Red dot	p	h	h	k

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ef	Epp	RL	CL	epx	ib	Io	i(surge)	Ⓑ Ehk	Ⓑ Alt
Unit:	V	Vac	Ohms	µf	v	ma	mAdc	ma	v	ft
Maximum:	6.9	---	---	---	460	60	10	350	360	(see note 2)
Minimum:	5.7	---	---	---	---	---	---	---	---	
TEST CONDITIONS:	6.3	165	22,000	8	---	---	---	---	---	---

GENERAL:

Qualification - Not required

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:21Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1							
1353	Operation of rectifiers	Ehk = Eo + 117 Vac (see notes 1 and 3)	0.65	II	Io	8.0	---	mAdc
1231	Emission	Eb - 10 Vdc	0.65	II	Is	40	---	mAdc
---	Anode leakage	Ef = 6.9 V; Eb = -100 Vdc	0.65	II	Id	---	1.0	μAdc
1201	Short and discontinuity detection		0.4	II	---	---	---	---
---	Visual and mechanical inspection criteria		---	---	---	---	---	---
---	Dimensions	See figure 1	1.0	I	---	---	---	---
	Quality conformance inspection, part 2							
(B)1116	Lead fatigue		4.0	S3	---	---	---	---
1301	Heater current		6.5	S3	If	138	162	mA
(B)1336	Heater-cathode leakage		6.5	S3	Ihk	---	20	μAdc
1331	Direct-interelectrode capacitance		6.5	S3	Cp-kh Cph Chk	1.5 0.43 1.5	2.9 0.83 3.2	pF pF pF
(B)1211	Insulation of electrodes		4.0	S3	R	10	---	Meg
(B)2126	Glass strain		4.0	I	---	---	---	---
(B)1105	Permanence of marking		---	---	---	---	---	---
	Quality conformance inspection, part 3							
1501	Life-test provisions (intermittent) (500 hours)	Group A; Ehk = Eo + 117 Vac (see note 1)	---	---	---	---	---	---
---	Life-test end point (intermittent) (500 hours)	Operation of rectifiers	---	---	Io	7.0	---	mAdc

NOTES:

1. Half-wave rectifier circuit with Zp = 100 to 150 ohms.
2. See "Reduced pressure (altitude) rating," and altitude, maximum peak voltage.
3. This test to be performed at the conclusion of the holding period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:21Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11


Review activities:
Army - EL
Navy - SH
Air Force - 11, 85
DSA - ES

User activities:
Army - ME
Navy - AS, OS, MC, CG
Air Force - 19

Preparing activity:
Navy - EC

(Project 5960-2211-12)

Source: https://assist.dla.mil -- Downloaded: 202610-15T13:21Z
Check the source to verify that this is the current version before use.

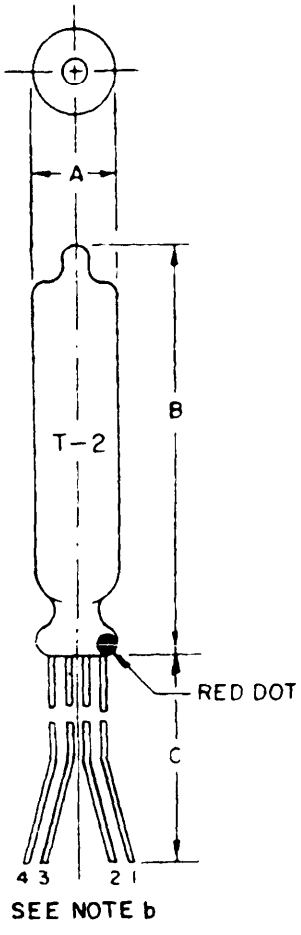

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses (See note a)	
	Minimum	Maximum
	Quality conformance inspection part 1	
A	---	.315 (8.00)
B	---	1.500 (38.10)
C	1.500 (38.10)	---

NOTES:

a. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

b. Base leads are .016 (.41 mm) dia., tinned, flexible with .048 (1.22 mm) center to center spacing.

FIGURE 1. Outline drawing of electron tube type 5704.

Source: https://assist.dla.mil -- Downloaded: 202610-15T13:21Z
Check the source to verify that this is the current version before use.