MILITARY SPECIFICATION SHEET

ELECTRON TUBE, RECEIVING

TYPE 5915

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Pentagrid amplifier, miniature

Outline --- 5-2 (EIA)

Base --- E7-1

Envelope --- T5-1/2

Cathode --- Coated unipotential

Base connections:

Pin No.	---	1	2	3	4	5	6	7
Element	---	g1	k, g5	h	h	a	g2, g4	g3

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ef	Eb	Ebb	Ec2 & 4	Ec1	Ec2 & 4	Ec3	egy3	egx3
Unit:	V	Vdc	Vdc	Vdc	Vdc	Vdc	Vdc	V	V
Maximum:	6.9	250	---	Note 1	-100	250	-100	90	-200
Minimum:	5.7	---	---	---	0	---	0	---	---
TEST CONDITIONS:	6.3	---	150	---	0	75	0	---	---

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	egy1	egx1	Pp	Pg3	Pg2 & 4	Pg1	Ik	ik
Unit:	V	V	W	W	W	W	mA	ma
Maximum:	Note 2	-200	1.0	0.5	1.0	0.5	20	70
Minimum:	---	---	---	---	---	---	---	---
TEST CONDITIONS:	---	---	---	---	---	---	---	---

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ehk	Rg1	Rg2 & 4	Rg3	Rp	TE	Alt
Unit:	V	Ohms	Ohms	Ohms	Ohms	°C	ft
Maximum:	100	---	---	---	---	120	Note 3
Minimum:	---	---	---	---	---	---	---
TEST CONDITIONS:	---	47,000	470	47,000	20,000	---	---

GENERAL:

Qualification - Required

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:22Z
Check the source to verify that this is the current version before use.


METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1								
1266	Total grid current	4	Ebb = 250 Vdc; Ec2 & 4 = 100 Vdc; Ec1 = -1.5 Vdc; Ecc3 = -1.5 Vdc; Rg3 = 0.5 Meg	0.65	II	Ic3	0	-1.9	µAdc
1256	Electrode current (1) (anode)	-	Ecc1 = -10 Vdc	0.65	II	Ib	0	200	µAdc
1256	Electrode current (2) (anode)	-	Ecc3 = -10 Vdc	0.65	II	Ib	0	200	µAdc
1256	Electrode current (3) (anode)	-	Rb = 20,000 ±1%, including meter resistance	0.65	II	Ib	5.0	6.5	mAdc
1231	Emission current	4	Eb = Ec2 & 4 = Ec1 = Ec3 = 15 Vdc	0.65	II	Is	40	---	mAdc
1201	Short and discontinuity detection	-		0.4	II	---	---	---	---
	Quality conformance inspection, part 2								
1031	Low-frequency vibration	5	Ebb = 250 Vdc; Ec2 & 4 = 100 Vdc; Ec1 = Ec3 = -1.5 Vdc; Rp = 10,000 ohms	---	---	Ep	---	300	mVac
1301	Heater current	-		---	---	If	275	325	mA
1336	Heater-cathode leakage	-		---	---	Ihk	---	20	uAdc
1256	Electrode current (screen)	-		---	---	Ic2	5.0	13.0	mAdc
(C) ---	Blocking (g3)	6	Ec2+4 = 90 Vdc; Rg2+4 = 0 ohms (see figure 1)	---	---	Ec3	---	---	---
(C) 1331	Direct-interelectrode capacitance	-	Without shield	6.5	Code E	Cg1a	---	0.08	pF
						Cg3a	---	0.35	pF
						Cg1g3	---	0.22	pF
						Cg1-all	4.0	6.8	pF
						Cg3-all	5.3	8.5	pF
						Ca-all	6.4	8.8	pF
1211	Insulation of electrodes	-		4.0	S3	---	---	---	---
2126	Glass strain	-		4.0	I	---	---	---	---
1121	Base strain	-		---	---	---	---	---	---
1105	Permanence of marking	-		---	---	---	---	---	---
	Quality conformance inspection, part 3								
1501	Intermittent life (1)	-	Group A; Ec2 & 4 = 67.5 Vdc; Ec1 = Ec3 = -25 Vdc; Rg2 & 4 = 0; TE = 120°C	---	---	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:22Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 3 -Continued								
---	Intermittent life-test (1) end points (500 hours)								
Ⓒ1256	Electrode current (3) (anode)	-		---	---	ΔIb	---	1.2	mAdc
Ⓒ1266	Total grid current	-		---	---	Ic3	---	-5.0	μAdc
1501	Intermittent life (2)	-	Group D; Ec2 & 4 = 67.5 Vdc; Ec1 = Ec3 = 0 Vdc; Rg2 & 4 = 0; TE = 120°C	---	---	---	---	---	---
---	Intermittent life-test (2) end points (500 hours)								
Ⓒ1256	Electrode current (3) (anode)	-		---	---	ΔIb	---	1.2	mAdc
Ⓒ1266	Total grid current	-		---	---	Ic3	---	-5.0	μAdc

NOTES:

1. Grids number 2 and number 4 input rating curve.

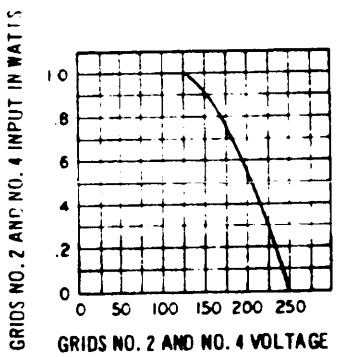

2. Peak positive voltage limited in amplitude by maximum ik rating, and in time duration by the dissipation ratings.
3. See "Reduced pressure (altitude) rating" paragraph in the basic document.
4. This test to be performed at the conclusion of the holding period.
5. Vibrate perpendicular to a plane through pins 2 and 6.
6. Ⓒ With the cathode fully preheated, operate the test switch at least 3 consecutive times. The VTVM reading must return immediately to a value less than 10 Vdc when the switch is returned to the normally closed position (applying zero bias to g3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:22Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MU
Air Force - 99
DLA - ES

User activities:
Army - ME
Navy - AS, OS, MC, CG
Air Force - 11, 17

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5960-3144)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:22Z
Check the source to verify that this is the current version before use.

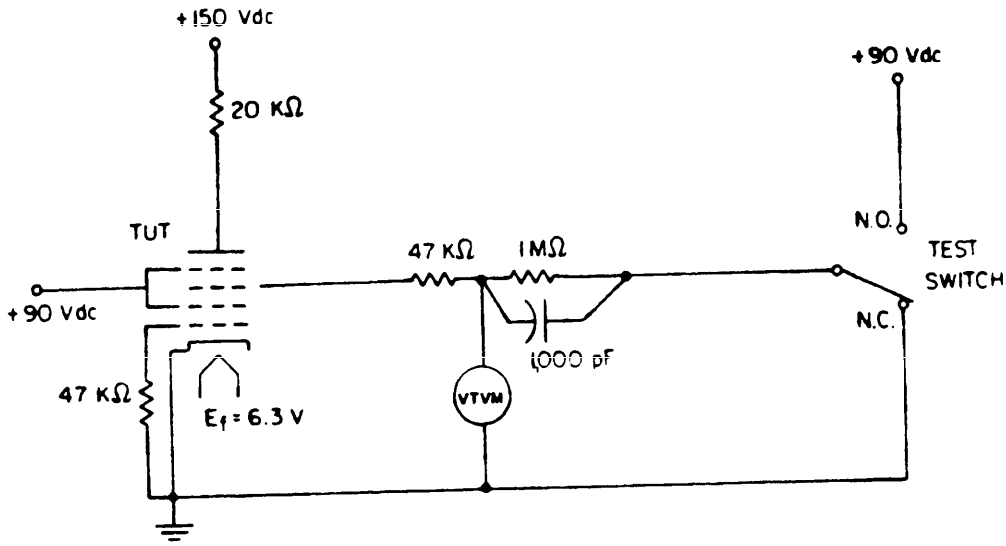


FIGURE 1. Blocking (g3) test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:22Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-15T13:22Z
Check the source to verify that this is the current version before use.