MILITARY SPECIFICATION SHEET

ELECTRON TUBE, KLYSTRON

TYPE 726B

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

DESCRIPTION: Reflex oscillator, mechanically tuned, integral cavity, power output = 110 mW, frequency range 2,883 to 3,173 MHz

ABSOLUTE RATINGS:

Parameter:	Ef	Ers	Er	Ik	Alt
Unit:	V	Vdc	Vdc	mAdc	ft
Maximum:	6.8	330	-250	35	10,000
Minimum:	5.8	---	0	---	---

PHYSICAL CHARACTERISTICS:

Dimensions: See figure 1
Cathode: Unipotential

TEST CONDITIONS:

Parameter:	Ef	Ers	Er	F
Unit:	V	Vdc	Vdc	MHz
Test condition 1:				
Maximum:	---	---	-160	---
:	6.3	300	---	F2
Minimum:	---	---	-100	---
Test condition 2:				
Maximum:	---	---	-160	---
:	6.0	300	---	F2
Minimum:	---	---	-100	---
Test condition 3:				
Maximum:	---	---	-120	---
:	6.3	300	---	F1
Minimum:	---	---	-60	---

Frequency		
F	MHz	±
1	2,883	0.3%
2	3,173	0.3%

GENERAL:

Qualification - Required

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:23Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TEST	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	Qualification inspection							
4027	Temperature coefficient	---	---		ΔF/ΔT	-0.10	+0.10	MHz/°C
1031	High-frequency vibration	---	---		---	---	---	---
	Quality conformance inspection, part 1	1	---					
4250	Power level (output)	---	2		Po	110	---	mW
1256	Electrode current (cathode)	---	1		Ik	---	30	mAdc
4223	Mechanical tuning range	--- ---	1 3		F F	3,173 ---	--- 2,883	MHz MHz
4214	Cathode emission	---	1	Ef = 5.8 V	ΔIk	---	5.0	mAdc
4229	Total reflector current	---	1		Ir	---	7.0	μAdc
4229	Reflector-leakage current	---	1		Ir	---	5.0	μAdc
4229	Reflector-gas current	---	1		Ir	---	2.0	μAdc
	Quality conformance inspection, part 2							
1336	Heater-cathode leakage	---	1	Ehk = ±45 Vdc	Ihk	0	50	μAdc
1301	Heater current	---	1		If	410	470	mA
4280	Electronic tuning range	---	1	Er 50Ω max Po	ΔF	25	---	MHz
1211	Insulation of electrodes	---	---	300 Vdc; tube cold	Rk-rs	2.0	---	Meg
4231	Electronic tuning hysteresis (2)	---	1		---	---	5.0	%
	Quality conformance inspection, part 3							
4551	Life test	---	1	Group B	t	500	---	hrs
---	Life-test end point:							
4250	Power level (output)	---	2		Po	50	---	mW

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:23Z
Check the source to verify that this is the current version before use.

NOTE:

1. Unless otherwise specified, the AQL for all tests listed under quality conformance inspection, part 1, shall be 1.0 percent, inspection level II.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army -
Air Force - 11
DSA - ES

User activities:
Army - WC, AV
Navy - AS, OS, MC, CG, SH

Preparing activity: Navy - EC

Agent: DSA - ES

(Project 5960-2425-56)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:23Z
Check the source to verify that this is the current version before use.

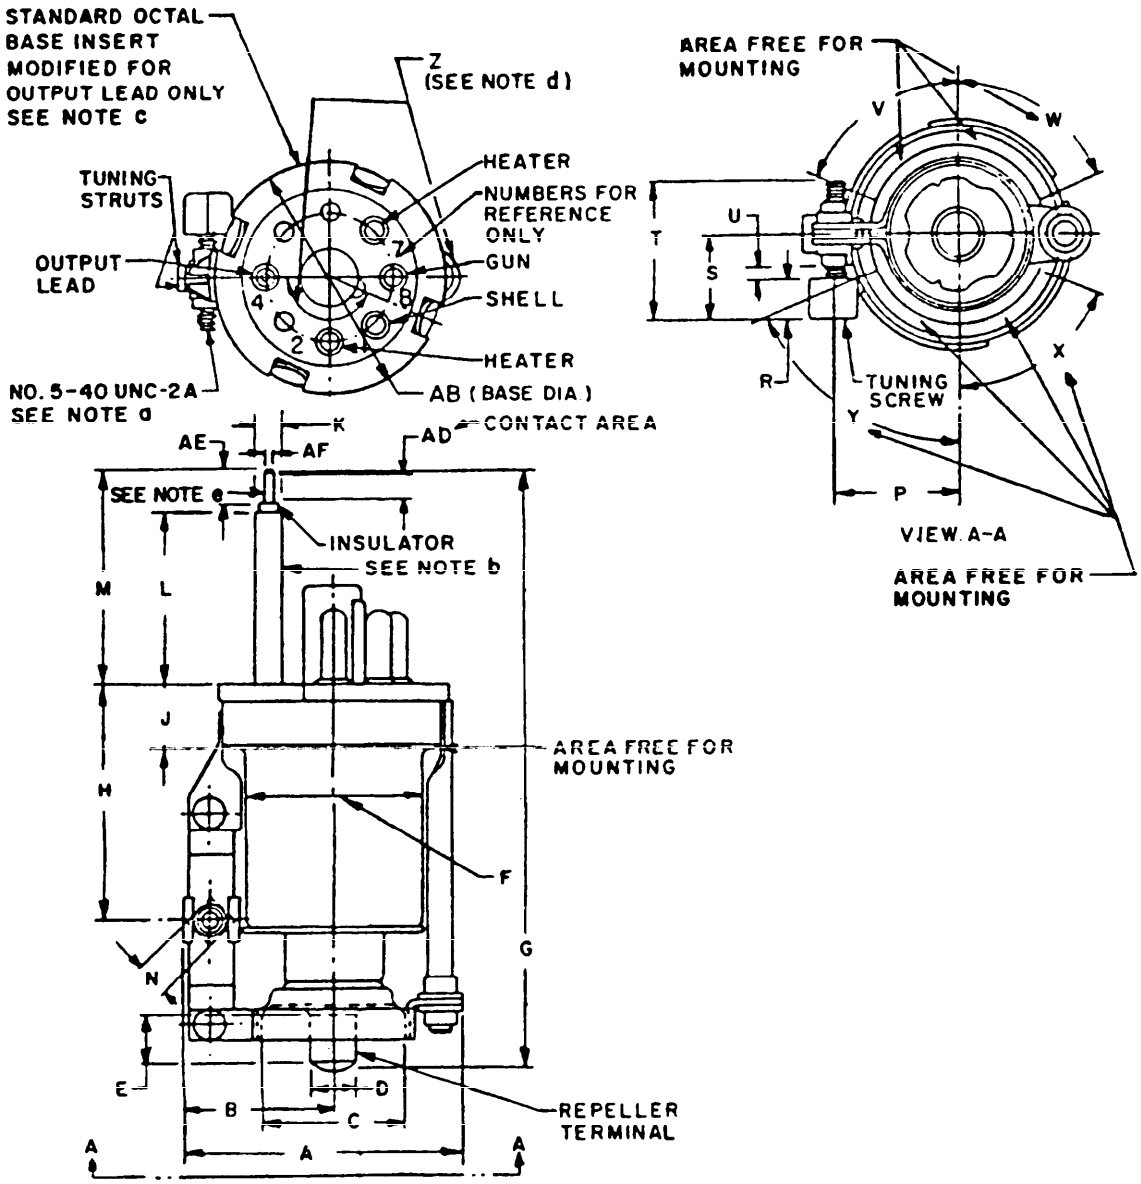


FIGURE 1. Outline drawing of electron tube type 726B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:23Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Qualification inspection		
C	.767 (19.48)	.797 (20.24)
E	.240 (6.10)	
T	.766 (19.46)	.797 (20.24)
AB	1.266 (32.16)	1.297 (32.94)
V		70°
W		70°
X		70°
Y		70°
Quality conformance inspection, part 1		
H	1.313 (33.35)	1.437 (36.50)
J	.330 (8.38)	.400 (10.16)
K	.138 (3.51)	.142 (3.61)
L	.875 (22.23)	.984 (24.99)
M	1.203 (30.56)	1.234 (31.34)
P	.656 (16.66)	.719 (18.26)
Z	154.5°	160.5°
AD	.156 (3.96) Nom	
AE	.172 (4.37)	.203 (5.16)
AF	.035 (.89)	.045 (1.14)

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
A		1.609 (40.87)
B		.859 (21.82)
D	.245 (6.22)	.255 (6.48)
F	1.000 (25.40)	1.016 (25.81)
G	3.250 (82.55)	3.500 (88.90)
N	.187 (4.75) ± .005 (.13) square	
R	.203 (5.16)	.234 (5.94)
S	.484 (12.29)	.516 (13.11)
U		.116 (2.95)

NOTES:
a. The tuning screw shall be lubricated with oil-dag or equivalent non-corrosive lubricant. It shall be capable of being operated smoothly through its entire range without perceptible binding.
b. Nickel (30 MSI silver plate permissible).
c. This base shall be capable of being inserted in a gage 1.219 (30.96 mm) thick having 4 holes .25 (6.35 mm) deep from the top of the gage with diameters of .103 (2.62 mm) for the contact pins. Remaining portion of hole to be clearance, approximately .0156 (.40 mm) larger in diameter .160 x 1.219 (4.06 x 30.96 mm) deep for the output lead. All holes located on the true centers. Also locate a center hole having the contour of the pilot, but with a clearance of .002 (.05 mm) over the maximum diameter.
d. Applies to centerline passing through center of output lead and midway between tuning struts.
e. Shall be concentric with each other within .010 (.25 mm).
f. Base is phenolic wafer.

FIGURE 1. Outline drawing of electron tube type 726B - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-15T13:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:23Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 202610-15T13:23Z
Check the source to verify that this is the current version before use.