[INCH-POUND]
A-A-1665B
September 5, 1996
SUPERSEDING
A-A-1665A
March 22, 1983

COMMERCIAL ITEM DESCRIPTION

GLOVES, MEN'S AND WOMEN'S (WORK)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers men's and women's light duty work gloves.

2. CLASSIFICATION

2.1 Classification. The gloves shall be of the following styles, as specified (see 7.3).

Style 1 - Clute pattern, knit wrist cuff, regular size.
Style 2 - Clute pattern, gauntlet, regular size.
Style 3 - Reversible palm pattern, knit wrist cuff, large size.

3. SALIENT CHARACTERISTICS

3.1 Materials.

3.1.1 Flannel fabric. The flannel fabric shall be unbleached, 100 percent cotton twill, napped on the filling side, woven from cleaned yarns, and shall meet the requirements listed in table I.

Table I. Requirements for flannel, minimum.

Characteristic	Style 1	Style 2	Style 3	Test Method
Weight	10 oz/sq yd (333.3 g/sq m)	10 oz/sq yd (333.3 g/sq m)	8 oz/sq yd (266.7 g/sq m)	ASTM D 3776
Yarns per inch				ASTM D 3775
Warp	60	60	62	
Filling	34	34	35	
Breaking Strength				ASTM D 5034
Warp	85 lbf (379.1 N)	85 lbf (379.1 N)	65 lbf (289.1 N)	
Filling	50 lbf (222.4 N)	50 lbf (222.4 N)	40 lbf (177.9 N)	

3.1.2 Knit wrist cuff fabric. The knit wrist cuff fabric shall be 1 by 1 rib knit, seamless, unbleached cotton tubing with a minimum flat width of 2-1/4 inches (5.7 cm). The fabric weight shall be 12 to 14 square yards (10 to 11.7 sq m) per pound (per 0.45 kg) and shall have a minimum of 14 wales and 20 courses per inch (2.5 cm) when tested in accordance with ASTM D 3887.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:15Z
Check the source to verify that this is the current version before use.

3.1.3 Gauntlet cuff fabric. The gauntlet cuff fabric shall be composed of two plain weave cotton or spun polyester fabrics, each weighing a minimum of 2 oz/sq yd (66.7 g/sq m), securely laminated together with not less than 12 oz/sq yd (400.0 g/sq m) of synthetic resin, synthetic rubber, or natural rubber. The finished fabric shall weigh 16 oz/sq yd (533.3 g/sq m), minimum, when tested in accordance with ASTM D 3776 and shall be unbleached.

3.1.4 Thread. The thread shall be unbleached, soft finish, machine sewing thread with a minimum breaking strength of 2 lbf (8.9 N), when tested in accordance with ASTM D 204.

3.2 Glove design. The gloves shall be constructed as illustrated in Figure 1, 2, or 3, as applicable. The backs, palms, fingers, and thumbs of the gloves shall be made from flannel, as specified in Table I. Styles 1 or 2 may be constructed with or without fourth finger side seams, at the manufacturer's option.

3.2.1 Figures. Figures 1, 2, and 3 are furnished for informational purposes only. In the event of any inconsistencies between a written description and a figure, the written description shall govern.

3.2.2 Style I. Style 1 gloves shall be a Clute-cut pattern with a sewn inseam and a knit wrist cuff, as shown in figure 1. The knit wrist cuff fabric shall be folded to form a double thickness tube with the cut edges held together by the seam at the top of the glove.

3.2.3 Style II. Style 2 gloves shall be a Clute-cut pattern with a sewn inseam and a gauntlet cuff, as shown in figure 2.

3.2.4 Style III. The style 3 gloves shall be a reversible pattern with a sewn inseam and knit wrist cuff, as shown in figure 3. The knit wrist cuff fabric shall be folded to form a double thickness tube with the cut edges held together by the seam at the top of the glove.

3.2.5 Dimensions. Dimensions of the finished glove shall be in accordance with table II. All measurements shall be made with the glove laid flat and under no tension. The length of the fingers shall be in proportion to the length of the second finger. Measurements A through D in table II correspond to the lettered dimensions in figures 1, 2, and 3. All tolerances shall be ± 1/4 in (± 0.6 cm).

Table II. - Glove dimensions.

Measurement Inches (centimeters)	Style I (see Figure 1)	Style II (see Figure 3)	Style III (see Figure 3)
A. Overall length, tip of second finger to top edge of cuff	10-3/4 (27.3)	13 (33.0)	11 (28.0)
B. Length of knit wrist cuff or gauntlet cuff, wrist seam to top edge of cuff	2-3/4 (7.0)	5 (12.7)	2-3/4 (7.0)
C. Width across palm, at thumb crotch	5-1/4 (13.3)	5-1/4 (13.3)	5-1/4 (13.3)
D. Width of knit wrist cuff or gauntlet cuff at opening	2-1/2 (6.4)	6-3/4 (17.1)	2-1/2 (6.4)

3.3 Forming. The gloves shall be properly shaped on heated forms and all seams worked out.

3.4 Label. Each glove shall be marked with the size, manufacturer's name, and last digit of the year of manufacture, in letters not less than 1/2 inch (1.3 cm) high. The marking shall be on the glove, with the bottom of the letters 1/2 ± 1/4 inch (1.3 ± 0.6 cm) from the seam joining the wristlet or gauntlet cuff to the glove.

3.5 Pairing. Gloves shall be matched and paired, and the pairs attached together in a secure manner that will keep the pairs together through shipping and handling without damaging the gloves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:15Z
Check the source to verify that this is the current version before use.

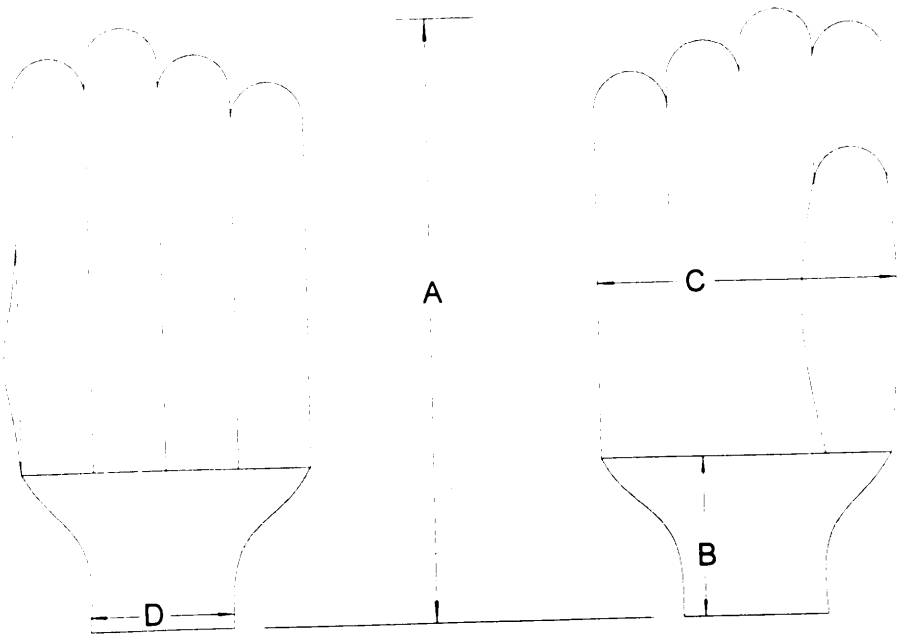


Figure 1 - Clute pattern.
Style 1 - Knit wrist cuff.

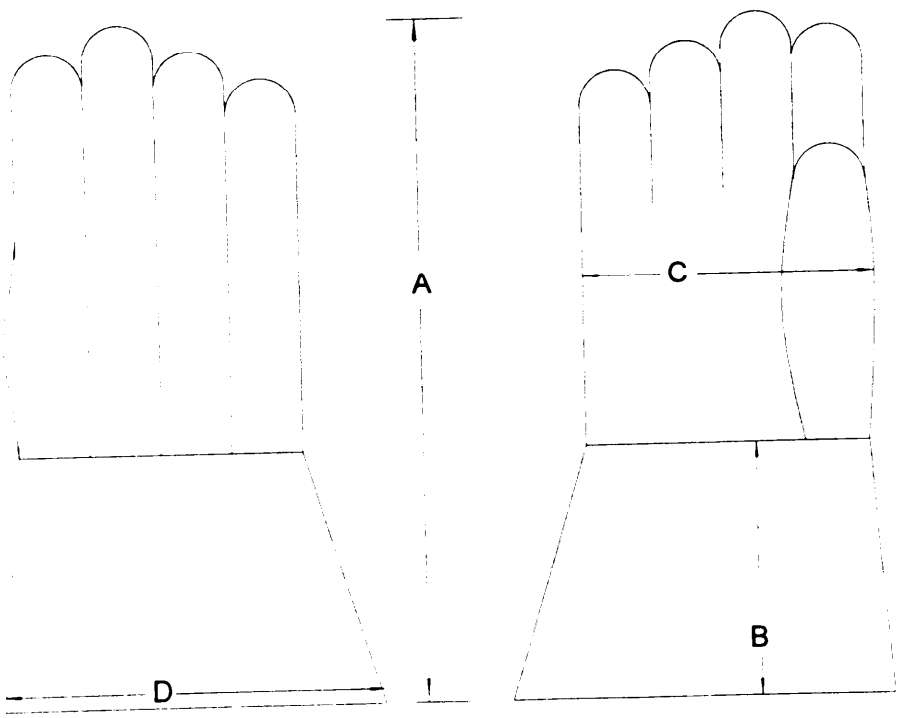


Figure 2 - Clute pattern.
Style 2 - Gauntlet cuff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:15Z
Check the source to verify that this is the current version before use.

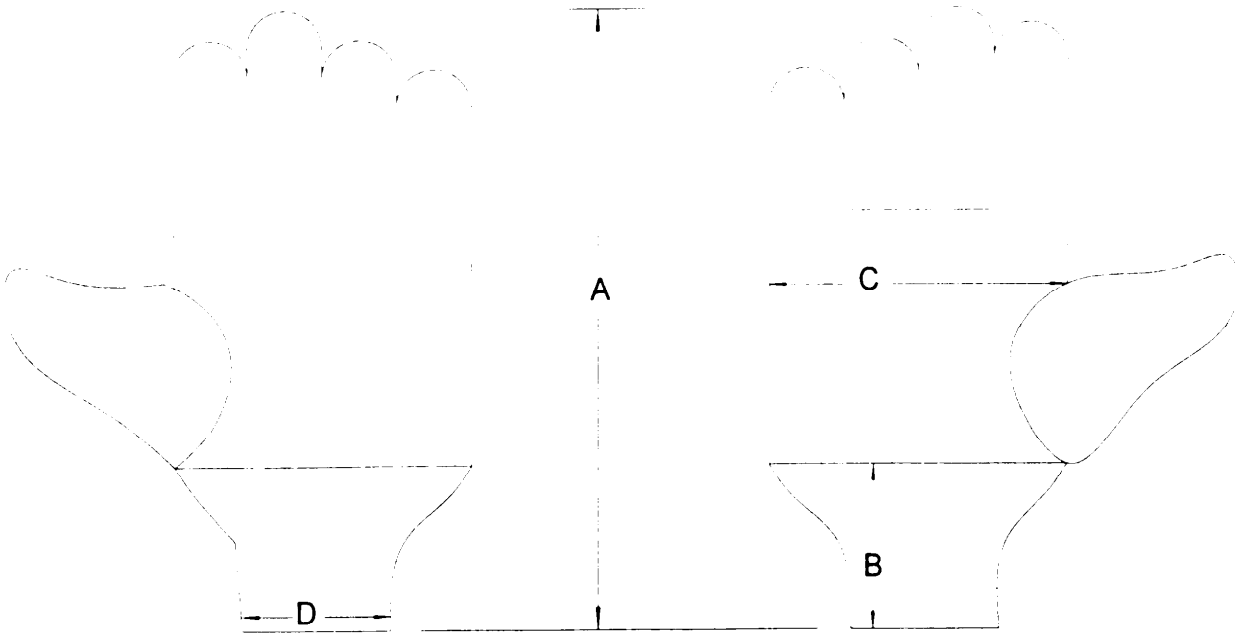


Figure 3 - Reversible palm pattern.
Style 3 - Knit wrist cuff.

3.6 Workmanship. The finished gloves shall be free from any defects which may affect durability, serviceability, or appearance. The gloves shall be comfortable to wear, shall not have oversize seams, and shall lay flat without excessive twisting of seams, shall be clean, and shall be free of all spots and stains, material defects such as weaving or knitting flaws, holes, and tears. The gloves shall be free from construction defects such as open seams, loose or skipped stitches, irregular sizes, excessive material where finger seams converge, and untrimmed thread ends.

3.7 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parenthesis are for information purposes only.

3.8 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

4. REGULATORY REQUIREMENTS.

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:15Z
Check the source to verify that this is the current version before use.

6. PACKAGING.

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES.

7.1 Part Identification Number (PIN). Gloves conforming with this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the CID number and style. An example of a part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the federal cataloging system only and does not constitute a requirement for the contractor.

EXAMPLE: AA16651 = Clute-cut, knit wrist cuff, size regular

AA16651
| |_____ Style (1 = Clute-cut/knit wrist cuff/regular
| 2 = Clute-cut/gauntlet cuff/regular
| 3 = Reversible palm cut/knit wrist cuff/large)
|_____ Commercial item description number

7.2 Sources of non-Government documents.

Copies of ASTM standards are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.3 Ordering data. Purchaser should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a) Title, number, and date of this commercial item description.
b) Style (See 2.1).
c) The preservation, packing, and marking desired.

7.4 National stock numbers (NSNs). The following NSNs correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

National Stock Number	Style	PIN
8415-00-268-8330	1	A-A-1665-1-8330
8415-00-268-8341	1	A-A-1665-1-8341
8415-00-559-5613	3	A-A-1665-3
8415-00-634-5026	1	A-A-1665-1
8415-00-634-5027	2	A-A-1665-2

7.5 Supersession data.

A-A-1665A	A-A-1665B
Style 3 - Gunn pattern, reversible, knit wristet, large size.	Style 3 - Reversible palm pattern, knit wrist cuff, large size.

MILITARY INTERESTS:

Review Activity:
Navy - NU

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:15Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:15Z
Check the source to verify that this is the current version before use.