[INCH-POUND]
A-A-267Ø
May 4, 199Ø

COMMERCIAL ITEM DESCRIPTION

STAPLE, TACKER

The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification GGG-T-2Ø for the procurement of staples.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This commercial item description covers tacker staples of the preformed type, cemented together in strip form for use in manually-operated compression type tackers conforming with Federal Specification GGG-T-2Ø.

1.2 Classification. Tacker staples shall be of the following types and sizes.

Type I - Medium duty.

Size 3 - Leg length 3/16 inch.
Size 4 - Leg length 1/4 inch.
Size 5 - Leg length 5/16 inch.

Type II - Heavy duty.

Size 4 - Leg length 1/4 inch.
Size 5 - Leg length 5/16 inch.
Size 6 - Leg length 3/8 inch.
Size 7 - Leg length 1/2 inch.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Industrial Engineering Group (7FXEI), 819 Taylor St., Fort Worth, TX 761Ø2

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The documents referenced in this commercial item description shall be the issues in effect on the date of the invitation for bids or request for proposal unless otherwise specified. These documents form a part of this commercial item description to the extent specified. In the event that there is a conflict between this commercial item description and a document referenced herein, this commercial item description shall take precedence.

Federal Specification:

GGG-T-20 - TACKER, STAPLE, (COMPRESSION TYPE, MANUALLY OPERATED), AND STAPLE, TACKER.

Federal Standard:

FED-STD-376 - Preferred Metric Units For General Use By The Federal Government.

Copies of Federal specifications and standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Alanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Franciso, CA; Los Angeles, CA; and Seattle, WA.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Copies of military specifications and standards may be obtained from Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

ASTM standard:

E 29 - Standard Practice For Using Digits In Test Data To Determine Conformance With Specifications.

Application for copies of ASTM standards should be addressed to ASTM, 1916 Race Street, Phildelphia, PA 19103.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Type I staples. Type I, medium duty staples shall be in accordance with the dimensions shown in figure 1. The staples shall be preformed to a U-shape, conforming to figure 1. The staples shall be cemented together in strip form, each strip consisting of a minimum of 137 staples and a maximum strip length of 4.48 inches. The number of staples per strip in each box (see 5.1.1) shall average 140. The cement shall be applied smoothly and shall be set in such a manner that the surfaces of the strips shall be free from tackiness. The cemented staple strip shall easily slide through the tacker (see 3.3). The staple points or ends shall be of such design that the staples will meet the test in section 4. The steel wire shall be so tempered as to provide penetration of the staple to a firm seat without buckling or fracturing. The leg length(s) of the staples shall be in accordance with the sizes(s) specified. The staples shall be tinned, galvanized, or made equally corrosion resistant.

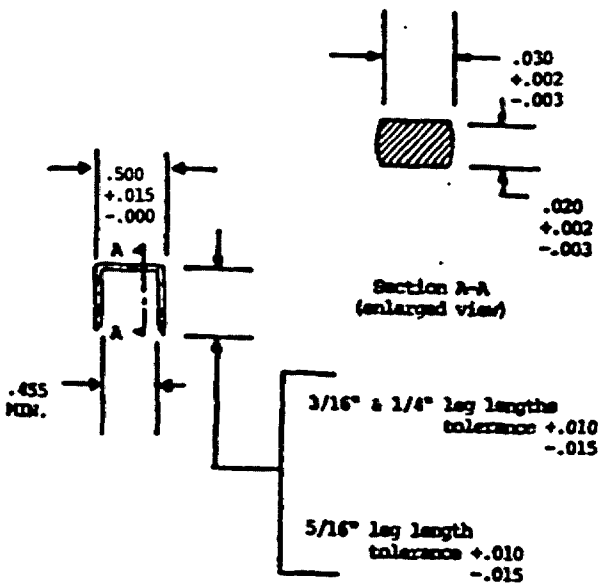


Figure 1. Type I, medium duty staple(s).

3.2 Type II staples. Type II, heavy duty staples shall be in accordance with paragraph 3.1, except that the staples shall be in accordance with the dimensions shown in figure 2, and shall be cemented together in strips consisting of a minimum of 82 staples and a maximum strip length of 4.37 inches. The number of staples per strip in each box (see 5.1.2) shall average 84.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

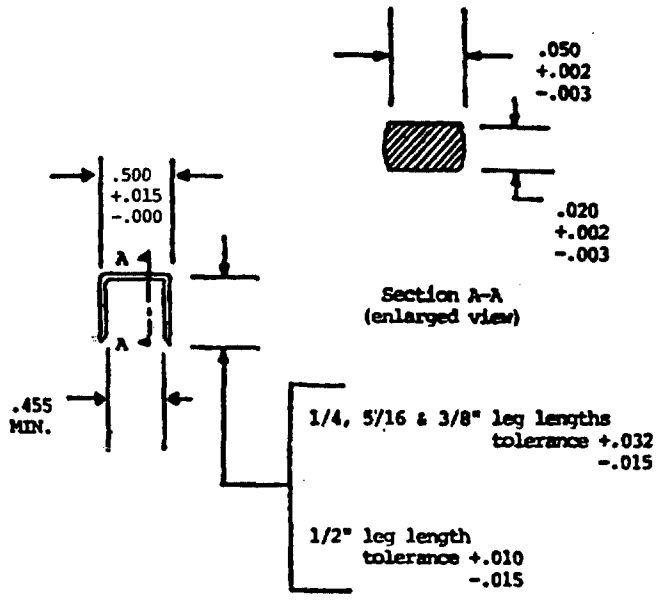


Figure 2. Type II, heavy duty staple(s).

3.3 Workmanship. The tacker staples shall function smoothly in tackers conforming with Federal Specification GGG-T-20. The staples shall be clean, well formed and free from defects that affect appearance or serviceability.

3.4 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch/pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

3.6 Commercial item. The use of the term "commercial item description" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling. The sample size levels of inspection shall be in accordance with MIL-STD-105.

4.3 Lot formation. All boxes of staples of the same type and size offered for delivery at one time shall be considered a lot for purposes of inspection and test.

4.4 Sampling for visual, dimensional and count examination. A random sample of boxes of staples shall be selected from each lot in accordance with special inspection level S-4, AQL 2.5 expressed in terms of percent defective (PD). The sample unit shall be one staple removed from one strip in each sample box. The sample unit for count shall be one complete strip of staples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

4.5 Sampling for tests. A random sample of boxes of staples shall be selected from each lot in accordance with special inspection level S-2, AQL 1.5 expressed in terms of percent defective (PD). The sample unit shall be one staple strip selected from each sample box.

4.6 Visual, dimensional and count examination. The sample staples shall be visually and dimensionally examined to verify compliance with this description. Dimensional tolerance limits specified are absolute limits as defined in ASTM E 29. Sample strips shall be examined to verify proper cementing, quantity of staples per strip (see figures 1 and 2 and paragraphs 3.1, 3.2 and 3.3) and number of strips per box (see 5.1.1 and 5.1.2).

4.7 Testing.

4.7.1 Performance test. Each sample strip of staples selected in accordance with paragraph 4.5 shall be loaded into an appropriate tacker for the type I or II staple being tested. One-hundred type I or fifty type II staples, as applicable from each strip shall be driven into a clear piece of finished Douglas fir lumber to full penetration. The sample strip shall be considered nonconforming if 98 percent of the staples in the strip do not dispense smoothly and achieve full penetration or any staple buckles, fractures or exhibits any other defect.

4.8 Examination for preparation for delivery. A random sample of unit, intermediate and shipping containers (as applicable) shall be selected from each lot and examined for conformance with the preservation, packaging, packing, labeling and marking required in the contract or order. Samples shall be selected in accordance with special inspection level S-2, AQL 6.5 expressed in terms of defects per hundred unit.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Type I. Thirty-six (36) strips of staples shall be packaged in a close-fitting box of the type normally used for this product. Each box shall contain a minimum of 5,Ø4Ø staples. The box shall be secured to prevent accidential opening during shipment, handling, storage and redistribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

5.1.2 Type II. Sixty (60) strips of staples shall be packaged in a close-fitting box of the type normally used for this product. Each box shall contain a minimum of 5,040 staples. The box shall be secured to prevent accidential opening during shipment, handling, storage and redistribution.

5.2 Packing. The packaged staples shall be packed in shipping containers and palletized as specified in the contract or purchase order. Unless otherwise specified, no shipping container shall exceed 65 pounds in weight.

5.3 Marking. In addition to the marking specified in the contract or purchase order, each box of staples shall be marked with the manufacturer's name, or brand name, or trademark, of such known character that the source of the product can be readily identified.

6. NOTES


6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. Type and size of staples.
c. Packing, palletization, labeling, and marking desired.

6.2 Part Numbering. Tacker staples conforming with this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the specification number, type and size. An example of the part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part numbers are not required to be placed on the product or container.

EXAMPLE:

AA2670A7



Size 3, 4, 5, 6, 7 or 8.

Type A=I, B=II.

General specification number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:

Air Force - 82

Review Activity:

Army - GL

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.