[INCH-POUND]
**A-A-3062**
**November 5, 1996**
SUPERSEDES
H-B-00190A(GSA-FSS)
March 31, 1963

**COMMERCIAL ITEM DESCRIPTION**

**BRUSHES, DUSTING**

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers dusting brushes set in wood, plastic, and twisted wire.

2. CLASSIFICATION. The dusting brushes shall be of the following types and styles (when applicable) as specified:

Type I - Brush, dusting, bench.
  Style 1 - Bakery bench.
  Style 2 - Counter.
Type II - Brush, dusting, wall and ceiling.
Type III - Brush, dusting, draftsman's.
Type IV - Brush, dusting, radiator.
Type V - Brush, dusting, office machine.

3. SALIENT CHARACTERISTICS

3.1 Materials.

3.1.1 Filler. The filler shall be horsetail hair or fine synthetic filament as specified. When horsetail hair is specified the filler shall be extra stiff, 100% natural horsetail hair which has been cleaned and sterilized prior to use. When synthetic filler is specified it shall be fine nylon, polypropylene, or polyester and may be color coded in accordance with standard commercial practice, level or crimped, with a round cross-section and an average diameter of 0.014 ±0.002 inch (0.36 ±0.05 mm).

3.1.2 Block. The blocks shall be one-piece wood or plastic. Wood used for blocks and handles shall be close-grained and straight-grained hardwood with no cracks, checks, splinters, or other defects which may affect appearance or serviceability. The finished wood blocks shall be sanded smooth. Plastic blocks shall be a modified general purpose polypropylene material, and shall be dense, uniform, and free from voids or channels.

3.1.3 Drawing wire. When used, drawing wire shall be 0.015 inch (0.38 mm) minimum diameter brass or copper alloy wire. In the finished product, the wire ends shall be concealed within the brush head.

3.1.4 Staple wire. When used, staple wire shall be a commercial quality wire normally used for the purpose intended.

3.2 Construction.

3.2.1 Type I brushes. Type I brushes shall meet the requirements of table 1 and shall be configured similar to figures 1 or 2 as applicable. The brush filler for the style 1 shall be fine synthetic filament. The brush filler for the style 2 shall be 100% horsetail hair. The tufts shall be secured within each tuft hole in such a manner that the tufts will withstand a 4 pound (17.8 N) pull for one minute and not loosen, break, or pull out of the block. The brush block shall be permanently marked with the NSN of the brush.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

Table 1, Type I brushes.

| Characteristic | Style 1 | Style 2 |
|---|---|---|
| Block, inches (cm) minimum | | |
| Length, overall | 13 (33) | 13 (33) |
| Length, brush part | 8 (20) | 8 (20) |
| Width, brush part | 1-3/4 (4.4) | 1-3/4 (4.4) |
| Thickness, brush part | 13/16 (2.1) | 13/16 (2.1) |
| Filler, inches (cm) minimum | | |
| Length clear of block | 3-1/8[1] (8.6[1]) | 2-3/8[1] (8.6[1]) |
| Spread | 4 (10) | 4 (10) |
| Filler weight, ounces (g) minimum | 4 (136) | 3-1/2 (99) |
| Holes, number, minimum | 85 (in 5 rows) | 85 (in 5 rows) |

[1] Within 2 inches (5 cm) of the nose, the filler may be 1/4 inch (0.6 cm) less than specified.

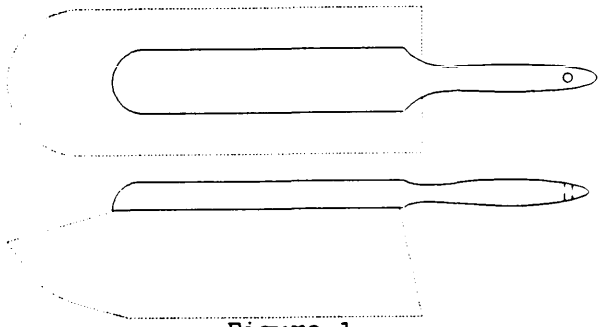


Figure 1
Type I, Style 1

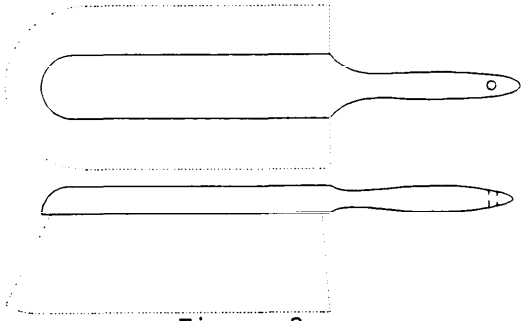


Figure 2
Type I, Style 2

3.2.2 Type II brushes. Type II brushes shall be configured similar to figure 3. The brush shall be a twisted wire type brush with a plastic or wood handle, the handle may be round in cross-section or contoured at the option of the manufacturer. The brush shall be 100% horsehair or a blend of horsehair and fine synthetic filament. The filler shall be caught in a twisted steel wire type frame, the frame wire ends shall be firmly inserted into the handle and secured. The twisted wire shall be 0.109 inch (2.8 mm) minimum diameter and shall be inherently corrosion resistant or plated to resist corrosion. The filler shall be long enough to extend a minimum of 1-1/2 inch (3.8 cm) from the frame wire. The finished brush shall be 11-1/2 inches (29.2 cm) minimum in overall length, and 5 inches (12.7 cm) minimum in overall width. The handle shall have a 3/4 inch (1.9 cm), 5 threads per inch (5 threads per 2.5 cm), ACME threaded socket in the end away from the brush.

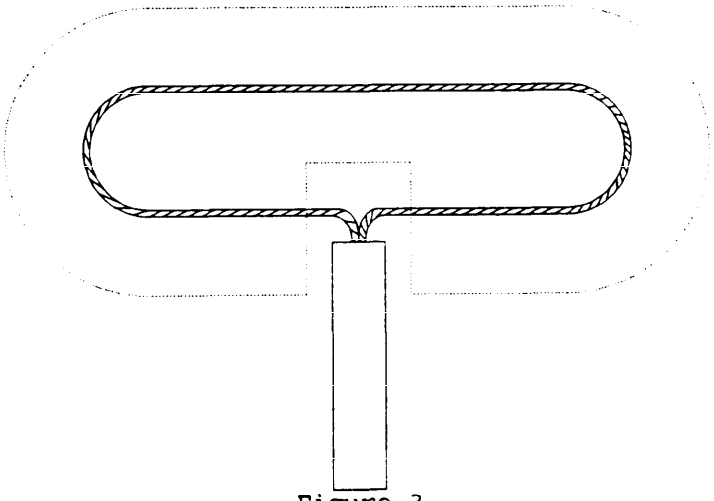


Figure 3
Type II



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.2.3 Type III brushes. The type III brushes shall meet the requirements of table 2, and shall be configured similar to figure 4. The filler shall be horsetail hair, fine synthetic filament, or a blend of both. The tufts shall be secured within each tuft hole in such a manner that the tufts will withstand a 4 pound (17.8 N) pull for one minute and not loosen, break, or pull out of the block. The block shall be permanently marked with the NSN of the brush.

Table 2, Type III brushes.

| Characteristic | Dimension |
|---|---|
| Block, inches (cm) | |
| Length, overall | 13-1/4 (33.7) minimum |
| Length, brush part | 7-7/8 (20.0) minimum |
| Width, brush part | 1-1/4, -1/2 +0 (3.1, -1.3 +0) |
| Thickness, brush part | 5/8, -1/4 +0 (1.6, -0.6 +0) |
| Filler | |
| Weight, ounces (g) | 0.80 (23) minimum |
| Length clear of block, inches (cm) | 2-1/4 ±1/4 (5.7 ±0.6) |
| Holes, number minimum | 25 (in 1 row) |

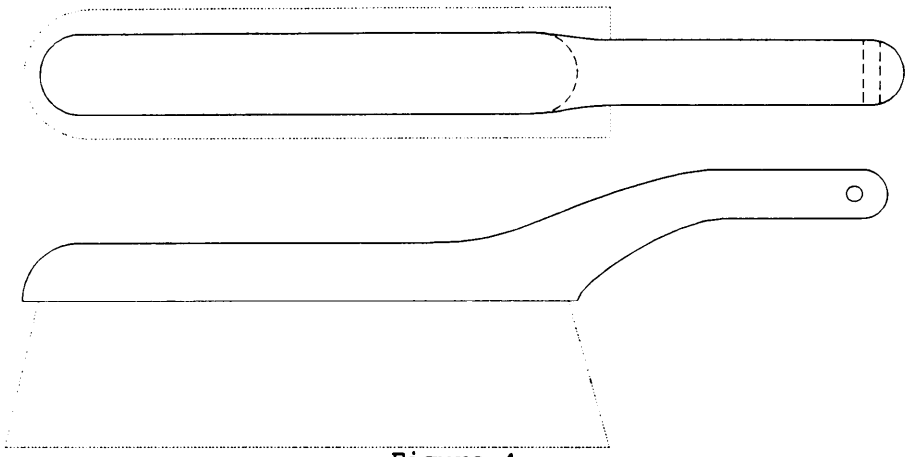


Figure 4
Type III

3.2.4 Type IV brushes. The type IV brush shall meet the requirements of table 3 and shall be configured similar to figure 5. The filler shall be 100% horsetail hair. The tufts shall be secured within each tuft hole in such a manner that the tufts will withstand a 4 pound (17.8 N) pull for one minute and not loosen, break, or pull out of the block. The block shall be permanently marked with the NSN of the brush.

Table 3, Type IV brushes

| Characteristic | Dimension |
|---|---|
| Block, inches (cm) | |
| Length, overall | 24 (61.0) minimum |
| Length, brush part | 9-1/2 (24.1) minimum |
| Width, center of brush part | 1-1/8 ±1/8 (2.9 ±0.3) |
| Thickness, brush part | 3/8 ±1/16 (1.0 ±0.2) |
| Filler | |
| Length clear of block, inches (cm) | 2-1/8 (5.4) minimum |
| Weight, ounce (g) | 1 (28) minimum |
| Holes, number minimum | 25 (in 1 row) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

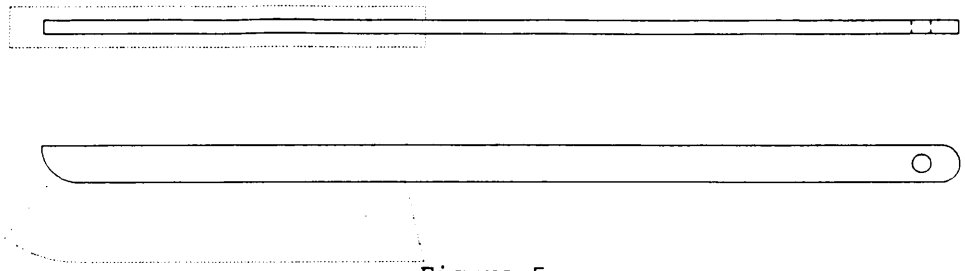


Figure 5
Type IV

3.2.5 Type V brushes. The type V brushes shall meet the requirements of table 4 and shall be configured similar to figure 6. The filler shall be 100% horsetail hair. The tufts shall be secured within each tuft hole in such a manner that the tufts will withstand a 4 pound (17.8 N) pull for one minute and not loosen, break or pull out of the block.

Table 4, Type V brushes.

| Characteristics | Dimensions |
|---|---|
| Block, inches (cm) | |
| Length, overall | 10 (25.4) minimum |
| Length, brush part | 5 (12.7) minimum |
| Width, brush part | 1-1/2 ±1/4 (3.8 ±0.6) |
| Thickness, overall | 1/2 (1.3) minimum |
| Filler | |
| Length clear of block, inches (cm) | 1 (2.5) minimum |
| Weight, ounce (g) | 1/2 (14) minimum |
| Holes, number minimum | 31 |

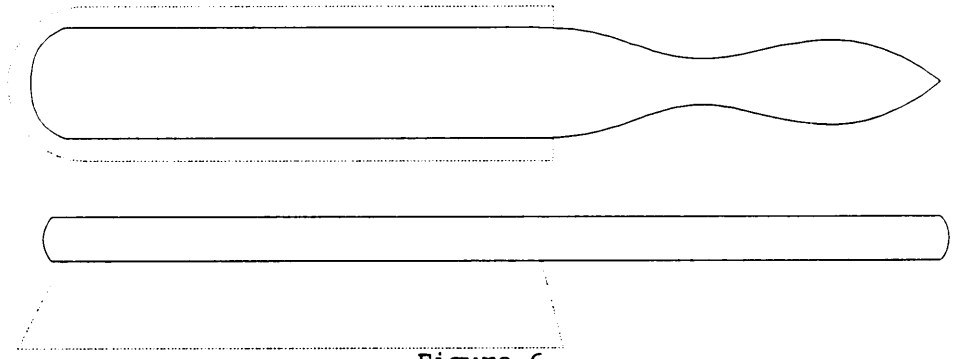


Figure 6
Type V

3.2.6 Workmanship. The brushes shall be of good quality workmanship and shall have no defects that may affect appearance, serviceability, or durability.

3.3 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

4. REGULATORY REQUIREMENTS.

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING, PACKING AND MARKING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.


7. NOTES

7.1 Intended use. The brushes are intended for general housekeeping duties.

7.2 Ordering data. Purchases should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this CID.
(b) Type and Style (when applicable).
(c) Packaging, packing, and markings required.

7.3 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

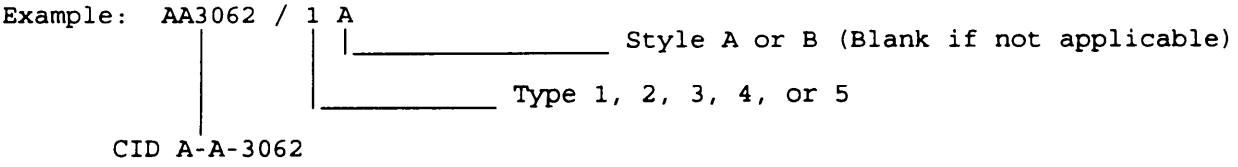


7.4 National Stock Numbers. The following NSNs (with the appropriate part number) are known to use this document:

| NSN | Type | Style | Part Number |
|---|---|---|---|
| 7920-00-240-6358 | I | 1 | AA3062/1A |
| 7920-00-178-8315 | I | 2 | AA3062/1B |
| 7920-00-292-2370 | II | | AA3062/2 |
| 7920-00-291-5812 | III | | AA3062/3 |
| 7920-00-233-3737 | IV | | AA3062/4 |
| 7920-00-543-7148 | V | | AA3062/5 |

Preparing Activity
GSA-FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.