
INCH-POUND
MIL-PRF-32271/7A
03 JUNE 2025
SUPERCEDING
MIL-PRF-32271/7
30 OCTOBER 2008

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, LITHIUM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification and MIL-PRF-32271.

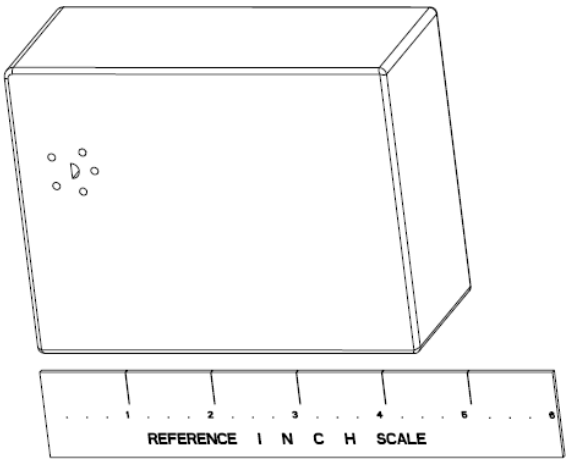

See NOTES for nominal dimensions; see applicable drawing for dimensional requirements.

Figure 1 – General view, M32271/7 battery shape

For clarity, MIL-PRF-32271 tables are labeled with capital Roman numerals (e.g. IX) and MIL-PRF-32271/7A tables are labeled with lower case Roman numerals (e.g. ix).

REQUIREMENTS (see 1.2 for Type, Class, and Features descriptions):

Type:	I		II	
Class:	2		2	
Features:	C	E	C	E
PIN:	M32271/7-12C	M32271/7-12E	M32271/7-22C	M32271/7-22E

Distribution Statement A. Approved for public release: distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:37Z
Check the source to verify that this is the current version before use.

Specification requirements: The following requirements of MIL-PRF-32271, identified therein as "when specified", are applicable as indicated below:

TABLE i. *"When specified" requirements*

Requirement	Requirement Paragraph	Verification Paragraph	Applicability by PIN Suffix (M32271/7-)			
			12C	12E	22C	22E
Parallel discharges	Tables II, III, IV, IX, X, XI, & XII		Yes	Yes	Yes	Yes
Additional material requirements	*3.3.5*	*4.6.1.11*	*No*	*No*	*No*	*No*
Parallel cell arrangements[1]	3.4		Yes	Yes	*No*	*No*
Connectors	3.4.5	4.6.1.7	Yes	Yes	Yes	Yes
Battery charger connection	*3.4.5.1*	*4.6.1.7.1*	*No*	*No*	*No*	*No*
Connection integrity	*3.4.5.2*					
Static	*3.4.5.2*	*4.6.1.7.2*	*No*	*No*	*No*	*No*
Dynamic	*3.4.5.2*	*4.6.1.7.3*	*No*	*No*	*No*	*No*
Terminal integrity	3.4.6					
Socket Strength	3.4.6.1	4.6.1.8.1	Yes	Yes	Yes	Yes
Terminal Strength	*3.4.6.2*	*4.6.1.8.2*	*No*	*No*	*No*	*No*
Complete discharge device	3.4.7	4.6.1.9	Yes	Yes	Yes	Yes
State of charge device	3.4.8	4.6.1.10	*No*	Yes	*No*	Yes
State of charge data output	3.4.8e	4.6.1.10	*No*	Yes	*No*	Yes
Additional design and construction requirements	*3.4.11*	*4.6.1.12*	*No*	*No*	*No*	*No*
Cell charging	3.5.3	4.6.2.3	Yes	Yes	Yes	Yes
Nail penetration	3.5.4	4.6.2.4	Yes	Yes	*No*	*No*
Parallel string charge protection[2]	3.5.6	4.6.2.6	Yes	Yes	*No*	*No*
Cell series string short circuit	3.5.7	4.6.2.7	Yes	Yes	*No*	*No*
Battery charge protection	3.5.12	4.6.2.12	Yes	Yes	Yes	Yes
Over-current protection	3.5.14.1	4.6.2.14	Yes	Yes	Yes	Yes
Over-temperature protection	3.5.15	4.6.2.15	Yes	Yes	Yes	Yes
Projectile	3.5.16	4.6.2.17	Yes	Yes	Yes	Yes
Additional safety requirements	*3.5.18*	*4.6.2.18*	*No*	*No*	*No*	*No*
Capacity LR	3.6	4.6.4.1.5	*No*	*No*	Yes	Yes
Capacity LRT	3.6	4.6.4.1.9	*No*	*No*	Yes	Yes
Capacity IDC	*3.6*	*4.6.4.1.10*	*No*	*No*	*No*	*No*
Surface temperature	3.6h	4.6.4.1	Yes	Yes	Yes	Yes
Immersion	3.7.8	4.6.5.8	Yes	Yes	Yes	Yes
Watertight integrity	*3.7.9*					
Shallow	*3.7.9*	*4.6.5.9*	*No*	*No*	*No*	*No*
Deep	*3.7.9*	*4.6.5.10*	*No*	*No*	*No*	*No*

[1] Parallel cell arrangements are permitted for Type I batteries described by this specification sheet but are not required.
[2] Only required if parallel cell arrangements are used for Type I batteries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:37Z
Check the source to verify that this is the current version before use.

TABLE i. *"When specified" requirements* - Continued

Requirement	Requirement Paragraph	Verification Paragraph	Applicability by PIN Suffix (M32271/7-)			
			12C	12E	22C	22E
Electromagnetic interference	*3.7.10*	*4.6.5.11*	*No*	*No*	*No*	*No*
Electrostatic discharge	*3.7.11*	*4.6.5.12*	*No*	*No*	*No*	*No*
Additional environmental requirements	*3.7.12*	*4.6.5.13*	*No*	*No*	*No*	*No*
DO NOT CHARGE! marking	*3.8.1.2b*		*No*	*No*	*No*	*No*
Complete discharge device marking/label	3.8.4		Yes	Yes	Yes	Yes
State of charge marking	3.8.5		*No*	Yes	*No*	Yes
Simplified battery label	*3.8.7*		*No*	*No*	*No*	*No*
Additional markings	*3.8.8*		*No*	*No*	*No*	*No*

Circuit protection devices (3.5.6.1; 3.5.11; 3.5.13.1; 3.5.13.2; & 3.5.14): All battery circuit protection devices (charge, over-current, and over-temperature) shall be electrically located so that the protection applies to either section A_1 or A_2.

Dimensions, marking and configuration, Types I & II

Battery - Drawing A3315884
Battery Connector (3.4.5 & 4.6.1.7) – Drawing A3315884
Mating Connector (3.4.5 & 4.6.1.7) – Drawing SM-C-447075
Battery Charger Connector – Not Applicable

Battery voltages (3.4.4 & 4.6.1.5):

Battery open circuit voltage (3.4.4.1 & 4.6.1.5.1):

Type:	Type I		Type II	
Section:	A_1	A_2	A_1	A_2
Maximum:	3.30	16.50	3.05	15.25
Minimum:	2.98	14.90	2.90	14.40

Battery closed circuit voltage (3.4.4.2 & 4.6.1.5.2):

For capacity, initial voltage delay, and closed circuit voltage test (A_2):
Minimum – 10.0 volts

Closed circuit voltage (A_1) Minimum: 2.2 volts

Cell closed circuit voltage test (3.4.4.3 & 4.6.1.3):

Minimum - 2.0 volts per cell

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:37Z
Check the source to verify that this is the current version before use.

Maximum weight (3.1 & 4.6.1.6):

Type I – 1.95 lbs. (885 g)
Type II – 1.5 lbs. (680 g)

Capacity test requirements (3.6 & 4.6.4), Type I:

Test	Initial voltage delay Time (MAX)	to Volts	Minimum Capacity		Cut-off Volts
			Storage Period		
			1-Week	4-Week	
I	1 second	10.0	5.3 hours		10.0
L	1 second	10.0	2.8 hours		10.0
H	1 second	10.0	9.1 hours		10.0
IT	1 second	10.0	4.9 hours	4.8 hours	10.0
LT	1 second	10.0	2.6 hours	2.5 hours	10.0
HT	1 second	10.0	8.4 hours	8.2 hours	10.0

Capacity test requirements (3.6 & 4.6.4), Type II:

Test	Initial voltage delay Time (MAX)	to Volts	Minimum Capacity		Cut-off Volts
			Storage Period		
			1-Week	4-Week	
I	5 seconds	10.0	3.8 hours		10.0
L	60 seconds	10.0	2.0 hours		10.0
H	5 seconds	10.0	6.5 hours		10.0
LR	5 seconds	10.0	49.0 hours		1.5
IT	5 seconds	10.0	3.5 hours	3.4 hours	10.0
LT	60 seconds	10.0	1.9 hours	1.8 hours	10.0
HT	5 seconds	10.0	6.0 hours	5.8 hours	10.0
LRT	5 seconds	10.0	45.6 hours	44.1 hours	1.5

Abuse test pulse discharge capacity requirement (3.5.13 & 4.6.2.13l):

Type I – 9.8 ampere- hours
Type II – 7.0 ampere-hours

METHODS OF EXAMINATION AND TEST:

Cell closed-circuit voltage test: When cells are tested as specified in 4.6.1.3, load each cell to be used in a single series cell string design with 2 amperes constant current, 1 ohm constant resistance, or 4 watts constant power. In the event that parallel cell arrangements are used (Type I only), use a load that produces a current equivalent to 2 amperes divided by the number of parallel cell strings to be used, as a minimum.

Battery closed-circuit voltage test: When tested as specified in 4.6.1.5.2, load each battery in the A_2 circuit with 2.0 amperes constant current, 5.0 ohms resistance, or 20 watts constant power. Load the A_1 circuit with 6.76 ohms.

Abuse test, pre-discharge: When tested as specified in 4.6.2.13a, discharge with a load of 2.0 amperes or 50 watts for: 2.6 hours for Type I batteries; and 1.9 hours for Type II batteries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:37Z
Check the source to verify that this is the current version before use.

Abuse test, pulse discharge: When tested as specified in 4.6.2.12i, discharge with a load of 2.5 ampere for 1 minute followed by 1.8 amperes for 4 minutes, cycled continuously to 10.0 volts.

Battery over-current protection: When tested as specified in 4.6.2.13, load batteries with either 4.0 amperes or 48 watts.

Immersion: When tested as specified in 4.6.5.8, apply a load of 0.2 amperes during the storage and immersion time periods specified.

Capacity tests (4.6.4):

Test	Discharge Rate[3]	Duty Cycle
I	2.0 amperes	Continuous discharge to cut-off volts, followed by 2.0 amperes To zero volts, then 2.0 amperes forced discharge for 10 minutes.
L	2.0 amperes	Continuous discharge to cut-off voltage
H	2.0 amperes	Discharge for 5 minutes at 2 amperes, followed by 5 minutes on open circuit; repeat cycle continuously to cut-off voltage
LR	160 mA/2.75W	Continuous discharge at 160 milli-amperes to 10.5 volts, then Discharge at 2.75 watts to cut-off voltage
IT	2.0 amperes	Continuous discharge to cut-off voltage
LT	2.0 amperes	Continuous discharge to cut-off voltage
HT	2.0 amperes	Discharge for 5 minutes at 2 amperes, followed by 5 minutes on open circuit; repeat cycle continuously to cut-off voltage
LRT	160 mA/2.75W	Continuous discharge at 160 milli-amperes to 10.5 volts, then Discharge at 2.75 watts to cut-off voltage

NOTES:

(This section contains information of a general nature which may be helpful, but is not mandatory)

Intended use: This specification covers non-rechargeable lithium batteries of the non-reserve type composed of electrochemical cells using lithium metal in the anode. They are intended for use in military communications and electronics equipment.

[3] Apply all discharges to the A_2 section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:37Z
Check the source to verify that this is the current version before use.

Nominal ratings[4]: The following are the nominal ratings for the battery described by this specification sheet. They are provided for information purposes.

Battery PIN:	**M32271/7-12C or -12E (Li/MnO_2)**	**M32271/7-22C or -22E (Li/SO_2)**
Overall Dimensions:	3.6 in. H x 4.6 in. W x 2.06 in. D	
MAX Weight:	1.95 lbs (885 grams)	1.5 lbs (680 grams)
Voltage Range:	10.0-16.5	10.0-15.25
Nominal Capacity (Ampere-hours):	10.6 Amp-hrs	7.6 Amp-hrs
Nominal Energy (Watt-hours):	155 Watt-hrs	110 Watt-hrs
MAX Rated Power Output:	25 Watts	
MAX Continuous Load Rating:	2.0 Amperes	
MAX Pulse Rating:	2.5 Amperes	
Instantaneous Trip Rating:	4.0 Amperes	
Operating Temperature Range:	-4 to 130ºF (-20 to 55ºC)	-20 to 130ºF (-29 to 55ºC)
Storage Temperature Range:	-40 to 160ºF (-40 to 71ºC)	
MAX Abusive Temperature (non-operating):	195ºF (91ºC)	

Other data:

Military Type Designations. The military type designations that relate to the PINs covered by this specification sheet are as follows: The BA-5398()/U designation has been used for the Type I PIN; the BA-5598()/U designation has been used for the Type II PIN.

All battery types covered by this specification sheet are subject to the transportation requirements of 49 CFR 173.185. Type I has solid cathodes and more than 2.0 grams of lithium content; Type II has a liquid cathode and more than 1.0 grams of lithium. See applicable Safety Data Sheet (SDS) for the maximum lithium weight per cell and battery. It should be noted that all non-rechargeable lithium batteries are restricted from shipment as cargo aboard passenger aircraft within, entering, or leaving the US.

All battery types include a complete discharge device in order to render each battery non-reactive after use. If a battery is damaged, or if the device does not operate as indicated by an amber or yellow light, the battery is considered reactive waste. All three battery types may be recycled after use. Universal waste rules, where applicable, apply only when recycling is the chosen disposal method.

The US Army CECOM Life Cycle Management Command (LCMC) publishes guidelines for the design of battery compartments for devices using the types I and II batteries covered by this specification sheet: Technical Bulletin 43-6135. Please contact the CECOM LCMC Directorate for Safety at usarmy.APG.cecom.mbx.amsel-sf-sec-cecom-lcmc--ds@army.mil for further information.

[4] Capacity and energy delivered by a battery are significantly affected by usage conditions, such as temperature and loads applied. If you have any questions about use of this battery in a particular device or circumstance, please visit the following web site (contact info is posted): https://battery.army.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:37Z
Check the source to verify that this is the current version before use.

Navy safety tests of NAVSEA S9310-AQ-SAF-010 are required for this battery during first article testing. The test data provided from the testing will be used to evaluate applications for specific using devices and Navy platforms. Devices using any of the three battery types covered by this specification sheet will require US Navy Safety Approval prior to use by Department of Navy users unless such approval has already been granted. Please consult with NAVSEA Instruction 9310.1 for further information.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army – CR
Navy – SH
Air Force – 99
DLA – GS

Review activities:
Navy – AS
Air Force – 71

Preparing activity:
Army – CR
(Project Number 6135-2025-008)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil or https://quicksearch.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:37Z
Check the source to verify that this is the current version before use.