METRIC
MIL-PRF-32273/1A(SH)
18 October 2010
SUPERSEDING
MIL-PRF-32273/1(SH)
31 October 2007

PERFORMANCE SPECIFICATION SHEET

BATTERY CELL, VALVE REGULATED LEAD-ACID, MAIN STORAGE, SUBMARINE, CLASSIFICATION TYPE B

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-32273(SH).

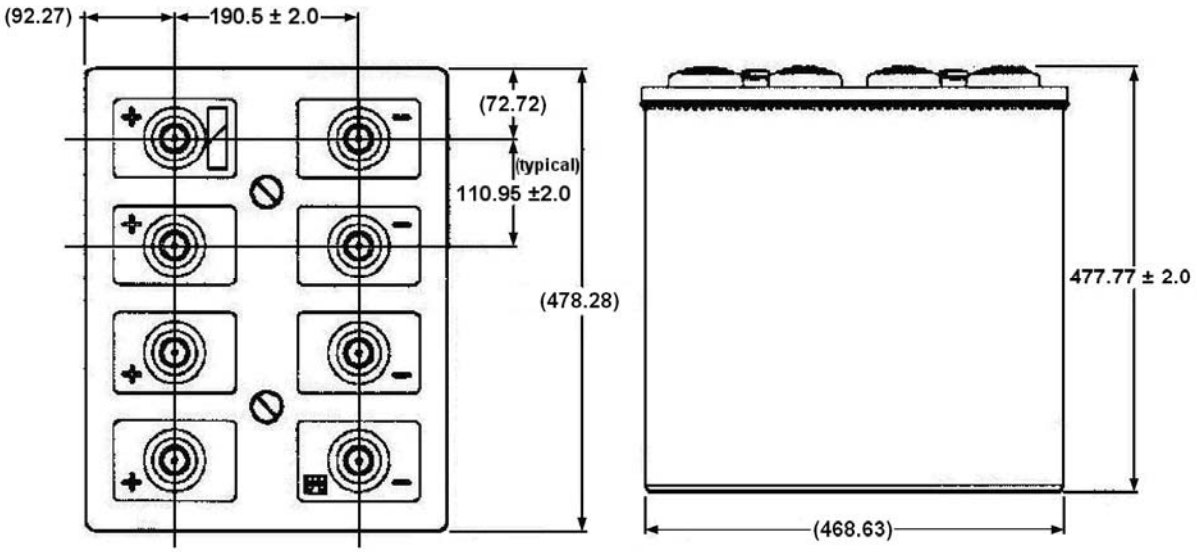


FIGURE 1. Type B cell.
(Dimensions are in millimeters.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:40Z
Check the source to verify that this is the current version before use.

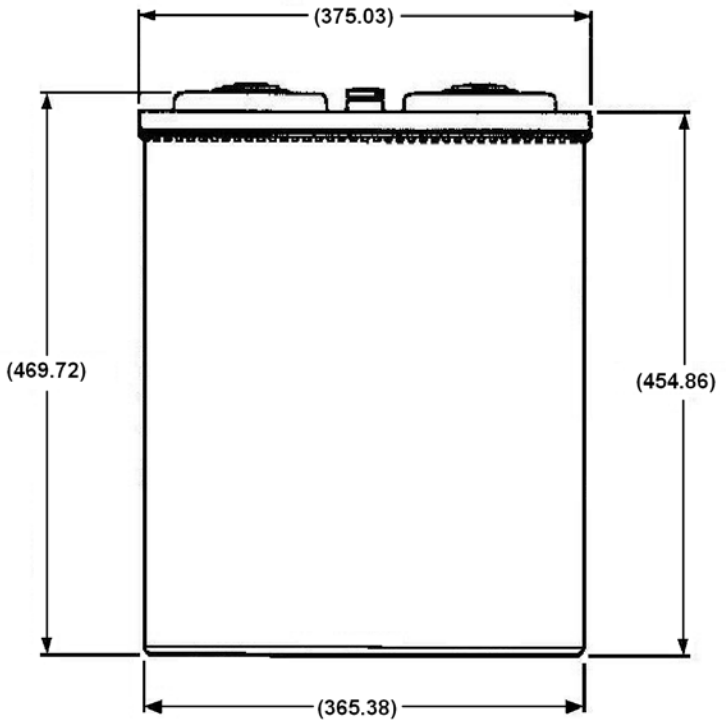


FIGURE 1. Type B cell – Continued.
(Dimensions are in millimeters.)

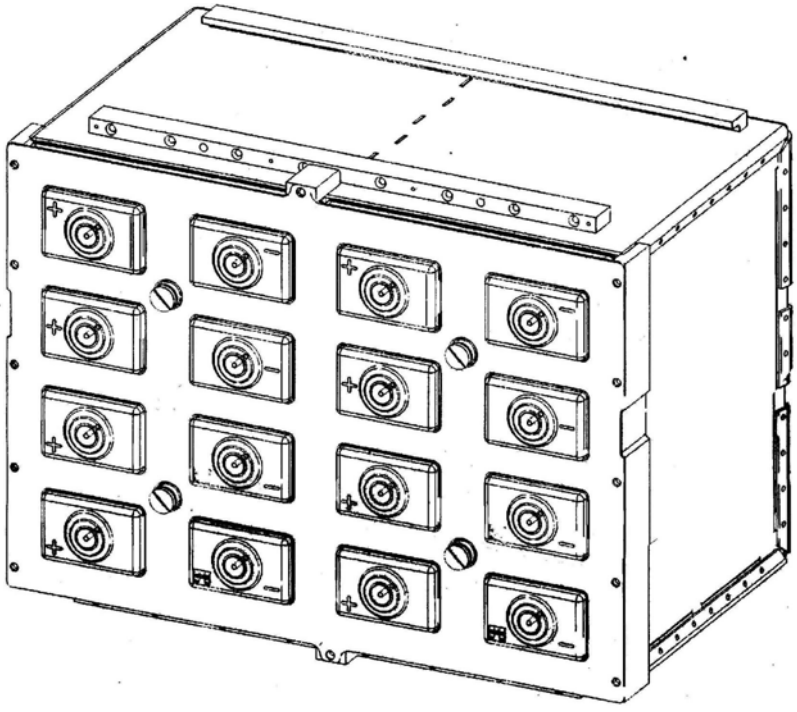


FIGURE 2. Type B dual cell module.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Qualification Required.

MIL-PRF-32273 Requirement			Type B Cell Requirement
3.3.1	-	Service life	240 equivalent Navy cycles or 96 months, whichever occurs first
3.3.1	-	Equivalent Navy cycle in ampere-hours of charge	2915 Ah
3.3.2	-	Capacity	Discharge characteristics shall be not less than as specified in table I below.
3.4.1.2	-	Mass per dual tray Mass per single tray	Nominal - 86.2 kg Nominal - 46.9 kg
3.4.2	-	Mass per cell (filled and charged)	Maximum - 254.4 kg Nominal - 244.9 kg

TABLE I. Type B cell electrical characteristics at 25 °C.

Hours	Amps	Rated Ampere-Hour Capacity (Ah)	Minimum Cell Voltage	kW	kWh	Average Cell Voltage During Discharge
1	2675	2675	1.50	5.002	5.002	1.87
3	1125	3375	1.70	2.182	6.546	1.94
6	650	3900	1.70	1.274	7.644	1.96
8	520	4160	1.70	1.024	8.195	1.97
10	440	4400	1.70	0.871	8.710	1.98

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:40Z
Check the source to verify that this is the current version before use.

TABLE II. 7-Day cycle test profile for Type B cell.

Clock Time	Day 1		Day 2		Day 3		Day 4		Day 5		Day 6		Day 7	
	Amps	Duration	Amps	Duration	Amps	Duration	Amps	Duration	Amps	Duration	Amps	Duration	Amps	Duration
8:00	138	20			276	20					276	20		
8:30			276	20			138	20	1380	30				
9:00					1380	30	138	20						
9:30							138	20			276	20		
10:00			276	20					138	20				
10:30	276	20									1380	30		
11:00			690	20					138	20				
11:30	276	20			1380	30	276	20						
12:00									690	20				
12:30							276	20			1380	30		
13:00	138	20	690	20			276	20						
13:30					276	20								
14:00											138	20		
14:30	1380	30									138	20		
15:00							1380	30						
15:30					690	20			276	20	4140	30		
16:00							138	20						
16:30	690	20			2760	60								
17:00	1380	30	276	20										
17:30							690	20	276	20				
18:00			138	20										
18:30	276	20					690	20						
19:00			138	20							690	20		
19:30							276	20	1380	30				
20:00	276	20												
20:30			1380	30					138	20				
21:00	138	20												
21:30					138	20			138	20				
22:00			138	20										
22:30														
23:00									690	20				
23:30											690	20		
0:00	138	20												
0:30														
1:00			276	20										
1:30														
2:00									276	20				
2:30														
3:00					138	20								
3:30														
4:00														
4:30														
5:00									276	20				
5:30			138	20										
6:00														
6:30														
7:00														
7:30														
Discharge Time		240		230		220		230		260		210		0

NOTE: “Duration” is time in minutes and “Amps” is the total circuit current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:40Z
Check the source to verify that this is the current version before use.

Preparing Activity:
Navy – SH
(Project 6140-2009-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/online.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:40Z
Check the source to verify that this is the current version before use.