INCH-POUND

MIL-DTL-83723/93D
1 October 2010
SUPERSEDING
MIL-DTL-83723/93C
23 May 2003

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SOLDER OR WELD FLANGE MOUNT, BAYONET COUPLING, STRAIGHT PIN CONTACT), (SERIES III, CLASSES H AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

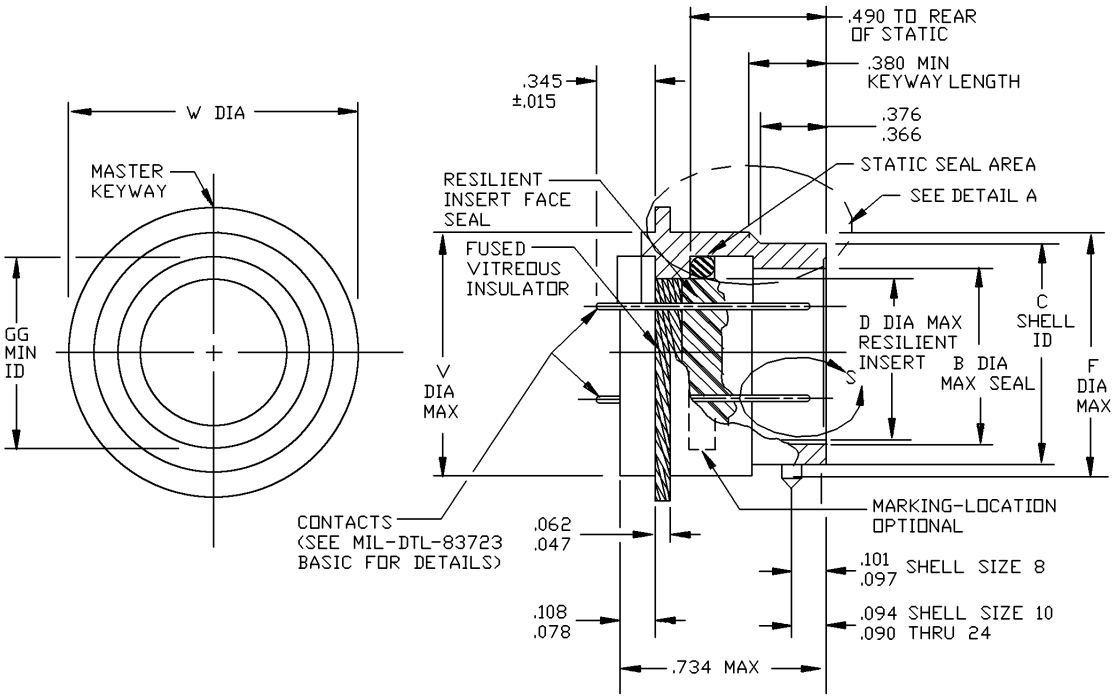


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

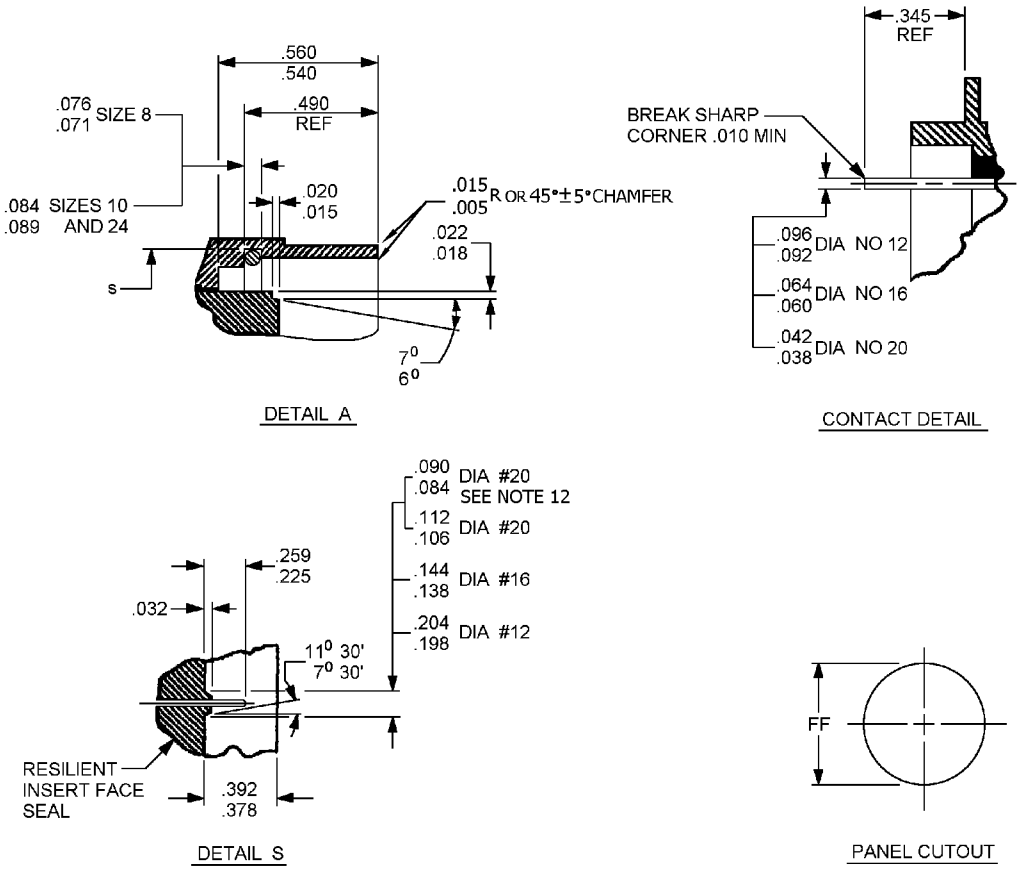


FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Shell size	C	D	E	F	S +.005 -.000	V	W	FF	GG
8	.428 .433	.312	.536 .531	.561	.508	.500	.760 .720	.505 .515	.406
10	.530 .535	.388	.659 .654	.696	.636	.562	.860 .820	.567 .577	.443
12	.700 .705	.558	.829 .824	.875	.806	.750	1.065 1.025	.755 .765	.668
14	.769 .774	.627	.898 .893	.935	.875	.812	1.110 1.070	.817 .827	.668
16	.896 .901	.772	1.025 1.020	1.062	1.002	.937	1.230 1.190	.942 .952	.763
18	1.002 1.007	.860	1.131 1.126	1.187	1.108	1.062	1.360 1.320	1.067 1.077	.862
20	1.127 1.132	.985	1.256 1.251	1.312	1.233	1.187	1.450 1.410	1.192 1.202	1.108
22	1.252 1.257	1.110	1.381 1.376	1.437	1.358	1.312	1.610 1.570	1.317 1.327	1.204
24	1.377 1.382	1.235	1.506 1.501	1.562	1.483	1.437	1.730 1.690	1.442 1.452	1.388

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.00005	0.001	.406	10.31	.769	19.53	1.131	28.73
.003	0.08	.428	10.87	.772	19.61	1.132	28.75
.004	0.10	.433	11.00	.774	19.66	1.187	30.15
.005	0.13	.443	11.25	.806	20.47	1.190	30.23
.015	0.38	.490	12.45	.812	20.62	1.192	30.28
.020	0.51	.500	12.70	.817	20.75	1.202	30.53
.032	0.81	.505	12.83	.820	20.83	1.204	30.58
.048	1.22	.508	12.90	.824	20.94	1.230	31.24
.062	1.57	.515	13.08	.827	21.01	1.235	31.37
.071	1.80	.530	13.46	.829	21.06	1.251	31.78
.076	1.93	.531	13.49	.860	21.84	1.252	31.80
.078	1.98	.535	13.59	.862	21.89	1.256	31.90
.084	2.13	.536	13.61	.875	22.23	1.257	31.93
.089	2.26	.540	13.71	.893	22.68	1.312	33.32
.090	2.29	.558	14.17	.896	22.76	1.317	33.45
.094	2.39	.560	14.22	.898	22.81	1.327	33.71
.097	2.46	.561	14.25	.901	22.89	1.358	34.49
.101	2.57	.562	14.27	.935	23.75	1.376	34.95
.106	2.69	.567	14.40	.937	23.80	1.377	34.98
.108	2.74	.577	14.66	.942	23.93	1.381	35.08
.112	2.84	.627	15.93	.952	24.18	1.382	35.10
.138	3.51	.636	16.15	.985	25.02	1.388	35.26
.144	3.66	.654	16.61	1.002	25.45	1.410	35.81
.198	5.03	.659	16.74	1.007	25.58	1.422	36.12
.204	5.18	.668	16.97	1.020	25.91	1.437	36.50
.225	5.72	.696	17.68	1.025	26.04	1.450	36.83
.259	6.58	.700	17.78	1.062	26.97	1.452	36.88
.312	7.52	.705	17.91	1.065	27.05	1.483	37.67
.345	8.75	.720	18.29	1.067	27.10	1.501	38.13
.366	9.30	.734	18.64	1.070	27.18	1.506	38.25
.376	9.55	.750	19.05	1.077	27.36	1.562	39.67
.378	9.60	.755	19.18	1.108	28.14	1.570	39.88
.380	9.65	.760	19.30	1.110	28.19	1.610	40.89
.388	9.86	.763	19.38	1.126	28.60	1.690	42.93
.392	9.96	.765	19.43	1.127	28.63	1.730	43.94

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 inches (0.13mm) for three place decimals, ± .01 inches (0.25mm) for two place decimals, and ± 1° for all angles.
4. Notes 5 through 10 applicable to contacts only.
5. Dimensions apply after plating.
6. Contact finish: Gold plate .000050 inch (0.00127 mm) minimum in accordance with ASTM B488. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.
7. Surface finish: 63 ( ) all over in accordance with ASME-B46.1 unless otherwise specified.
8. Remove all burrs and sharp edges .003 to .005 inches (0.076 to 0.127 mm) R.
9. Diameters to be concentric within .004 inches (0.102 mm) TIR.
10. Diameters in the same cross-sectional plane to be concentric with each other within .003 inches (0.076 mm) TIR.
11. Three (3) pins to be located within .004 inches (0.102 mm) either side of (TP) relative to master polarizing keyway.
12. See table I for contact cavities requiring these dimensions.

FIGURE 1. Dimensions and configurations – Continued.

REQUIREMENTS

Dimensions and configuration: See figure 1.

This connector mates with MIL-DTL-83723/75 and /77.

Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.


TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	03, 98	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

Connector accessories: See SAE-AS85049.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

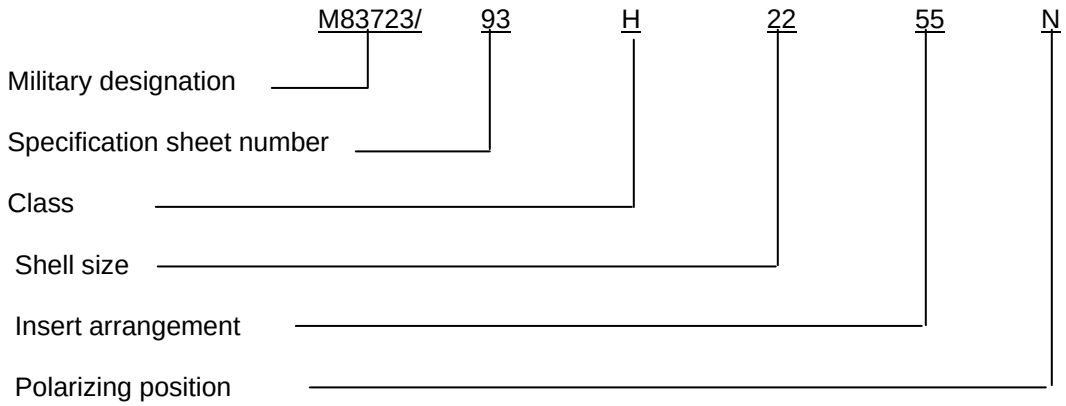

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-DTL-83723/75
MIL-DTL-83723/77
MIL-STD-1554
ASME-B46.1
ASTM B488
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2010-054)

Review activities:
Army – AR, MI
Navy – EC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.