INCH-POUND

MIL-DTL-83723/95G
1 October 2009
SUPERSEDING
MIL-DTL-83723/95F
15 September 2006

DETAIL SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, SELF-LOCKING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, K, M, R, T, W AND Z)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

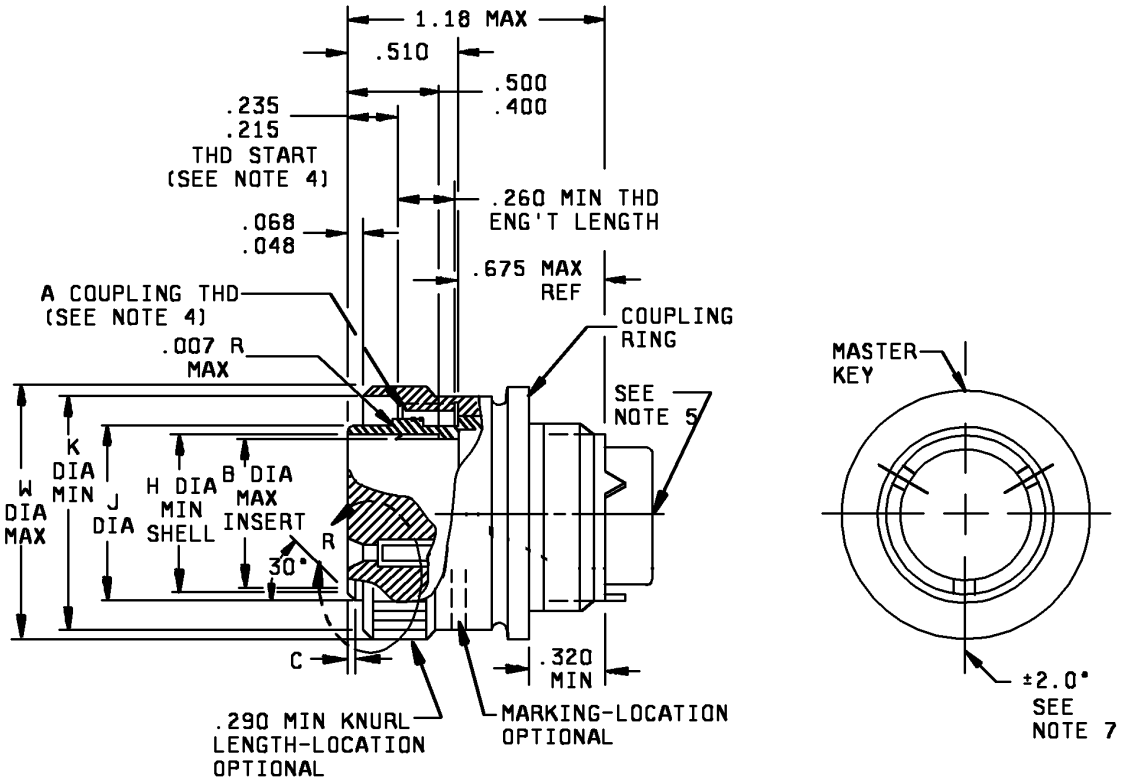



FIGURE 1. Dimensions and configurations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

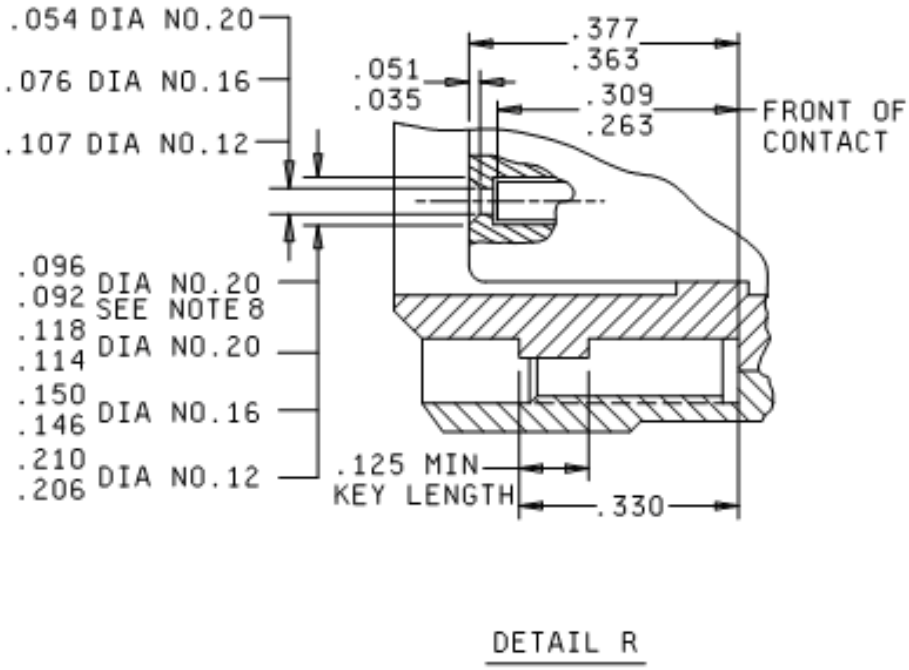



FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

| Shell size | A Thread UNEF-2B | B max | C | H min | J | K | W max |
|---|---|---|---|---|---|---|---|
| 8 | .5625-24 | .290 (7.37) | .025 (.64) | .294 (7.47) | .405 (10.29) .396 (10.06) | .575 (14.61) | .832 (21.13) |
| 10 | .6875-24 | .388 (9.86) | .031 (.79) | .428 (10.87) | .526 (13.36) .517 (13.13) | .707 (17.96) | .959 (24.36) |
| 12 | .875-20 | .558 (14.17) | .031 (.79) | .598 (15.19) | .696 (17.68) .687 (17.45) | .895 (22.73) | 1.097 (27.86) |
| 14 | .9375-20 | .627 (15.93) | .031 (.79) | .667 (16.94) | .765 (19.43) .756 (19.20) | .957 (24.31) | 1.236 (31.39) |
| 16 | 1.0625-18 | .772 (19.61) | .031 (.79) | .794 (20.17) | .892 (22.66) .883 (22.43) | 1.084 (27.53) | 1.360 (34.54) |
| 18 | 1.1875-18 | .860 (21.84) | .031 (.79)) | .900 (22.86) | .998 (25.35) .989 (25.12) | 1.209 (30.71) | 1.473 (37.41) |
| 20 | 1.3125-18 | .985 (25.02) | .031 (.79)) | 1.025 (26.04) | 1.123 (28.52) 1.114 (28.30) | 1.334 (33.88) | 1.586 (40.28) |
| 22 | 1.4375-18 | 1.110 (28.19) | .031 (.79) | 1.150 (29.21) | 1.248 (31.70) 1.239 (31.47) | 1.459 (37.06) | 1.703 (43.26) |
| 24 | 1.5625-18 | 1.235 (31.37) | .031 (.79) | 1.275 (32.39) | 1.373 (34.87) 1.364 (34.65) | 1.584 (40.23) | 1.846 (46.89) |

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .005 | 0.13 | .290 | 7.37 | .707 | 17.96 | 1.114 | 28.29 |
| .007 | 0.18 | .294 | 7.47 | .756 | 19.20 | 1.123 | 28.52 |
| .025 | 0.64 | .309 | 7.85 | .765 | 19.43 | 1.150 | 29.21 |
| .031 | 0.79 | .330 | 8.38 | .772 | 19.61 | 1.180 | 29.97 |
| .035 | 0.89 | .366 | 9.30 | .794 | 20.17 | 1.1875 | 30.16 |
| .048 | 1.22 | .377 | 9.58 | .832 | 21.13 | 1.209 | 30.71 |
| .051 | 1.30 | .388 | 9.86 | .860 | 21.84 | 1.235 | 31.37 |
| .054 | 1.37 | .396 | 10.05 | .875 | 22.23 | 1.236 | 31.39 |
| .068 | 1.73 | .400 | 10.16 | .880 | 22.35 | 1.239 | 31.47 |
| .076 | 1.93 | .405 | 10.29 | .883 | 22.43 | 1.248 | 31.70 |
| .092 | 2.34 | .428 | 10.87 | .892 | 22.66 | 1.275 | 32.39 |
| .096 | 2.44 | .500 | 12.70 | .895 | 22.73 | 1.334 | 33.88 |
| .107 | 2.71 | .510 | 12.95 | .900 | 22.86 | 1.360 | 34.54 |
| .114 | 2.90 | .517 | 13.13 | .9375 | 23.81 | 1.364 | 34.65 |
| .118 | 3.00 | .526 | 13.36 | .957 | 24.31 | 1.373 | 34.87 |
| .125 | 3.18 | .528 | 14.71 | .959 | 24.36 | 1.4375 | 36.51 |
| .146 | 3.71 | .5625 | 14.29 | .985 | 25.02 | 1.459 | 37.06 |
| .150 | 3.81 | .575 | 14.60 | .989 | 25.12 | 1.5625 | 39.69 |
| .206 | 5.23 | .598 | 15.19 | .998 | 25.35 | 1.584 | 40.23 |
| .210 | 5.33 | .627 | 15.93 | 1.025 | 26.03 | 1.586 | 40.28 |
| .215 | 5.46 | .667 | 16.94 | 1.0625 | 26.99 | 1.703 | 43.26 |
| .235 | 5.97 | .675 | 17.15 | 1.084 | 27.53 | 1.846 | 46.89 |
| .260 | 6.60 | .6875 | 17.46 | 1.097 | 27.86 | | |
| .263 | 6.68 | .696 | 17.68 | 1.110 | 28.19 | | |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ± 1° for all angles.
4. The dimensions showing the relationship between the coupling ring and connector shell apply only when the coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. The centerline of indicated projection must be located on vertical centerline ± 2.0°.
8. See table I for contact cavities requiring this dimension.

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This connector mates with MIL-DTL-83723/83, MIL-DTL-83723/85, MIL-DTL-83723/90 and MIL-DTL-83723/88 and MIL-DTL-83723/89.


Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfers on contact cavities.

| Shell size | Insert arrangements | Contact cavities |
|---|---|---|
| 8 | 03 | 1, 2, 3 |
| 10 | 06 | 1, 2, 3, 4, 5, 6 |

Connector accessories: See SAE-AS85049.

Part or Identifying Number (PIN) example:

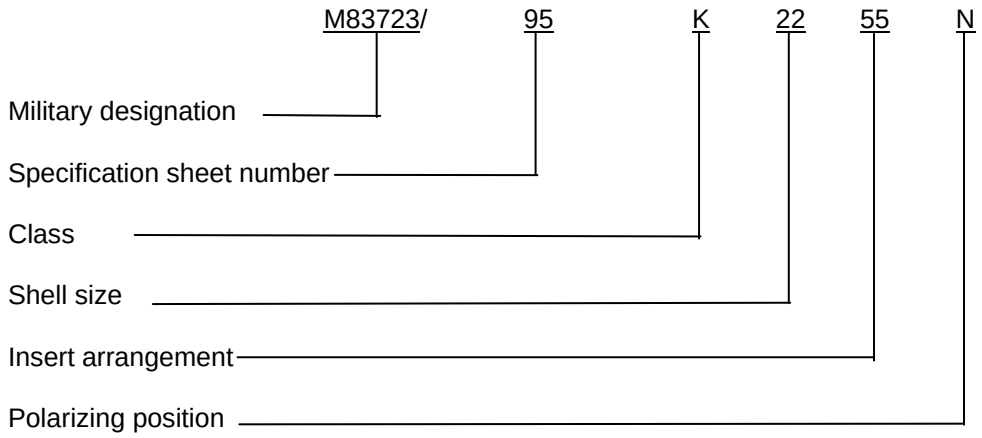


Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-STD-1554
MIL-DTL-26500
MIL-DTL-83723/83
MIL-DTL-83723/85
MIL-DTL-83723/88
MIL-DTL-83723/89
MIL-DTL-83723/90
SAE-AS85049



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-2008-170)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.