INCH-POUND

MIL-R-83726/22E
19 September 2005
SUPERSEDING
MIL-R-83726/22D(USAF)
31 August 1994

DETAIL SPECIFICATION SHEET

RELAYS, SOLID STATE, REPEAT CYCLE TIMER, TYPE IV, CLASS C, SPST, 250 MILLIAMPERES

Inactive for new design after 26 October 1993.
No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-83726.


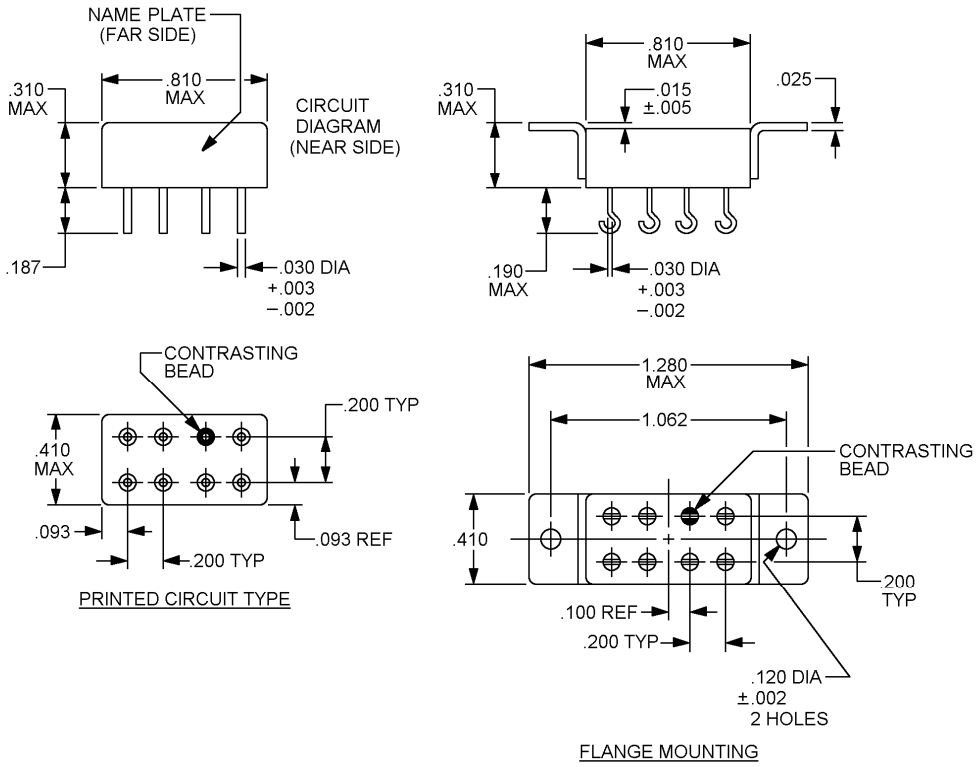


FIGURE 1. Dimensions and configurations.


AMSC N/A

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:28Z
Check the source to verify that this is the current version before use.

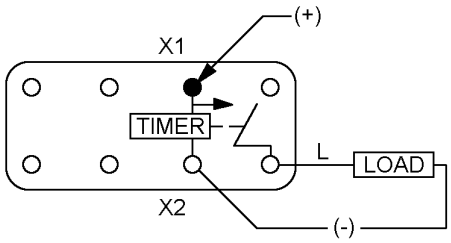

CIRCUIT DIAGRAM
(SEE NOTE 4)

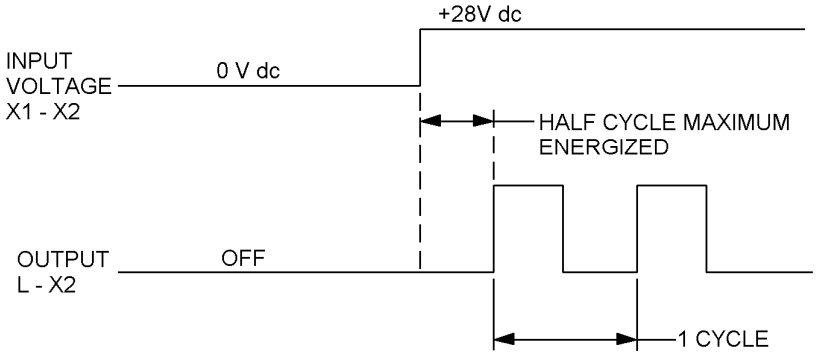

TIMING DIAGRAM

Inches	mm	Inches	mm
.002	0.05	.187	4.75
.003	0.08	.190	4.83
.010	0.25	.200	5.08
.025	0.64	.310	7.87
.030	0.76	.410	10.41
.093	2.36	.810	20.57
.100	2.54	1.062	26.97
.120	3.05	1.280	32.51

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.03 (0.8 mm) for two place decimals.
4. Spare terminals are connected internally. Do not use for external tie points or for terminals.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Operating data:

Timing action: Repeat cycle.

Cycle rate: 10 maximum per second; 1.0 minimum per 60 seconds; on time 50 percent.

Timing accuracy: 1/ 10 percent of the total cycle time.

Recycle time: 2/ 10 milliseconds.

Input data:

Input voltage: 28 V dc nominal; range 18 to 32 V dc.

Duty rating: Continuous.

Current drain: 5 milliamperes maximum plus load at 25°C.

Polarity protection: The timer shall be inoperative during, and unclamped by, reversal of the polarity of the operating voltage.

Output data:

Configuration: SPST; switch closure to +28 V dc.

Rating: Equivalent of two M6363/8-7 lamps in parallel (see MIL-DTL-6363/8).

Suppression: Inductive suppression provided for output protection.

Voltage drop: 2 V dc maximum.

Endurance: 1,000,000 cycles minimum for test.

Qualification: 2,000 hours or 1,000,000 cycles, whichever is less.

1/ The accuracy requirement applies for any combination of operating temperature and voltage.
2/ Recycle time is defined as the maximum time that power must be removed from the input terminals to assure that the next timing cycle will be completed within the specified timing tolerance. (Units can be recycled during timing or after time-out.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:28Z
Check the source to verify that this is the current version before use.

Electrical data:

Transients in accordance with MIL-STD-704 for 28 volts dc system (figure 11).

Radio noise: MIL-STD-461, class 1D.

Motor load: Not applicable.

Insulation resistance: 1,000 megohms at 500 V dc at sea level; 100 V dc at 80,000 feet between each pin and case.

Dielectric strength: 1,000 V rms at 60 Hz at sea level; 350 V rms at 80,000 feet between case and pins connected together.

Environmental data:

Ambient temperature (operating or nonoperating): -55°C to +125°C.

Vibration (sinusoidal): .06 inch DA, 10 Hz to 100 Hz.
30 g's, 100 Hz to 3,000 Hz.

Vibration (random): MIL-STD-202, method 214, test condition 1, letter J, duration of 30 minutes.

Shock: 1,100 g's for 09.5 millisecond.

Acceleration: 100 g's, any axis.

Seal: MIL-STD-883, method 1014, conditions B and C, except for gross leak, step 2.

Moisture resistance: MIL-STD-202, method 106.

Maximum altitude rating: 80,000 feet.

Physical data:

Dimensions and configuration: See figure 1.

Terminations: See figure 1.

Terminal strength: 3 pounds pull.


Weight: 0.5 ounce.

Marking: See MIL-PRF-83726. In addition, relays shall be marked with the ESDS identifier as specified in MIL-STD-1285.

Electrostatic discharge (ESD) control program: Applicable (see MIL-PRF-83726).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:28Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): Consists of the prefix M83726/22-, a four-digit dash number denoting the length of one complete cycle (expressed in milliseconds), and a suffix letter W for relays with less stringent EMI requirements and a suffix letter A for relays with more stringent EMI requirements.

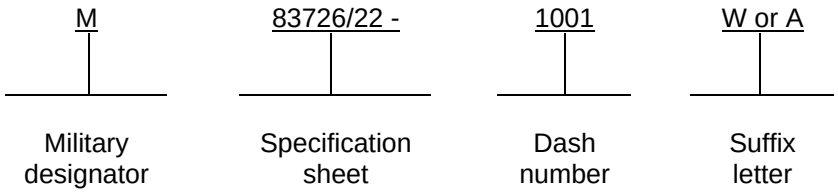

Examples

The first three digits of the dash number are significant; the fourth digit is the number of zeros to follow the first three digits. The time delay is expressed in milliseconds and converted to seconds.

M83726/22 - 1000W - Time delay repeat cycle 1 per 100 ms for printed-circuit type mounting.
M83726/22 - 2500A - Time delay repeat cycle 4 per second with flange mounting.

Conformance inspection: Performance of group B and group C testing is not applicable.

Referenced documents. In addition to MIL-PRF-83726, this document references the following:

MIL-STD-202	MIL-STD- 461	MIL-STD-704
MIL-STD-883	MIL-STD-1285	MIL-DTL-6363/8

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1320)

Review activities:
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:28Z
Check the source to verify that this is the current version before use.