MILITARY SPECIFICATION SHEET

(A) CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, RIGHT-ANGLE, PIN CONTACTS, FOR PRINTED CIRCUIT BOARDS,
(.100 INCH CONTACT SPACING), 12, 16, 20, 28, 40, 60, 80, AND 100 CONTACT POSITIONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

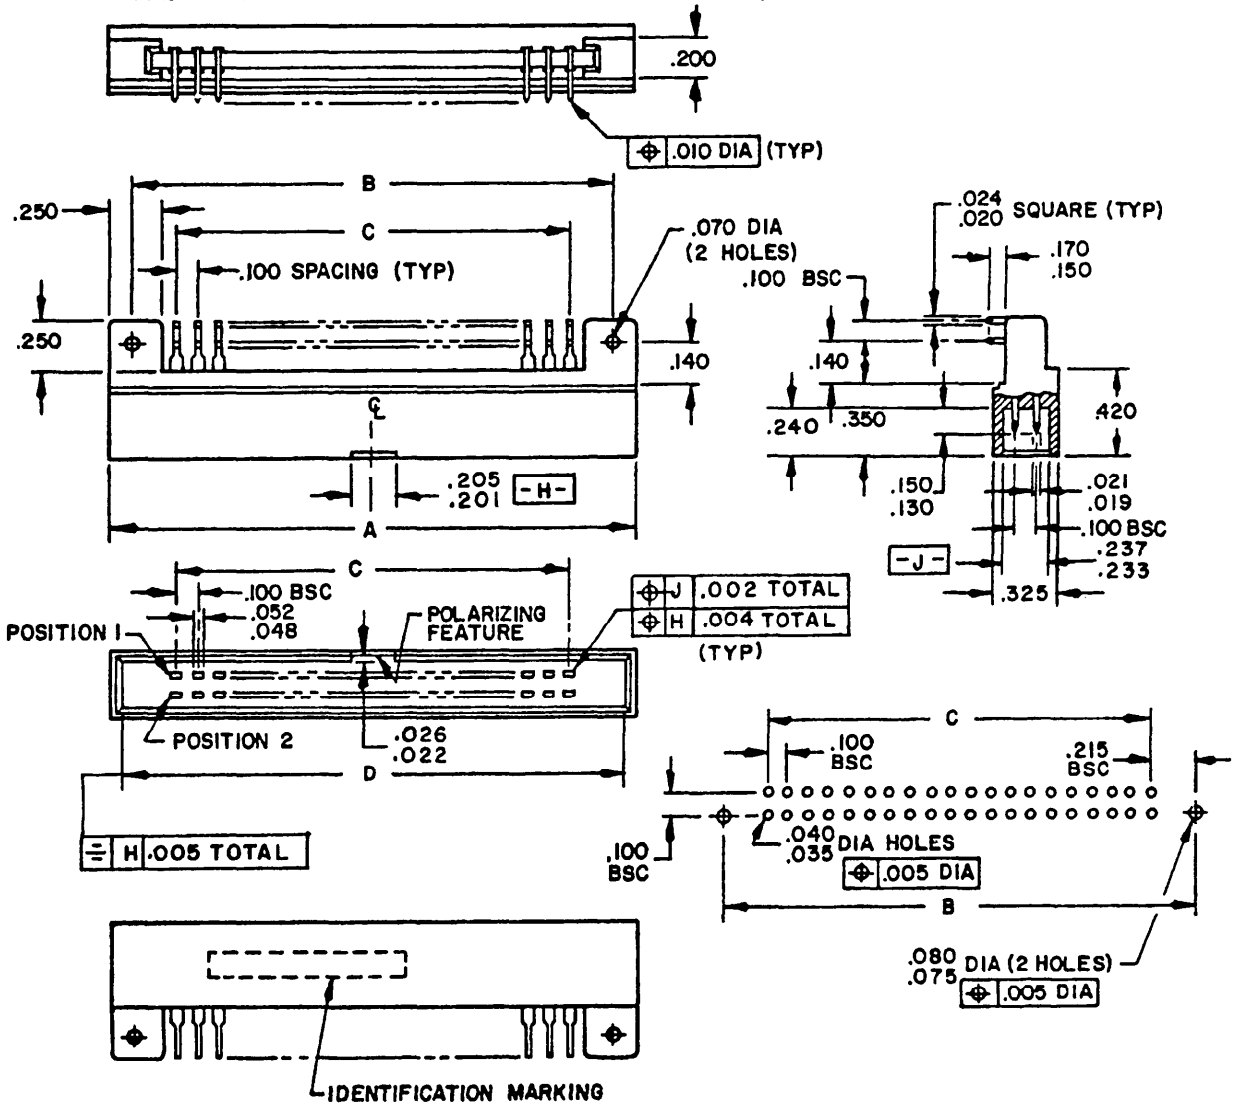


FIGURE 1. Connector, right angle plug (.100 inch contact spacing).

(A) denotes change

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:50Z
Check the source to verify that this is the current version before use.

Dash numbers	Number of contacts	A ±.010	B ±.010	C Ref.	D ±.005
01	12	1.150	.930	.500	1.060
02	16	1.350	1.130	.700	1.260
03	20	1.550	1.330	.900	1.460
04	28	1.950	1.730	1.300	1.860
05	40	2.550	2.330	1.900	2.460
06	60	3.550	3.330	2.900	3.460
07	80	4.550	4.330	3.900	4.460
08	100	5.550	5.330	4.900	5.460

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.052	1.32	.233	5.92	1.150	29.21	2.550	64.77
.004	.10	.070	1.78	.237	6.02	1.260	32.00	2.900	73.66
.005	.13	.075	1.90	.240	6.10	1.300	33.02	3.330	84.58
.010	.25	.080	2.03	.250	6.35	1.330	33.78	3.460	87.88
.019	.48	.100	2.54	.325	8.26	1.350	34.29	3.550	90.17
.020	.51	.130	3.30	.350	8.89	1.460	37.08	3.900	99.06
.021	.53	.140	3.56	.420	10.67	1.550	39.37	4.330	109.98
.022	.56	.150	3.81	.500	12.70	1.730	43.94	4.460	113.28
.024	.61	.170	4.32	.700	17.78	1.840	46.74	4.550	115.57
.026	.66	.200	5.08	.900	22.86	1.900	48.26	4.900	124.46
.035	.89	.201	5.11	.930	23.62	1.950	49.53	5.330	135.38
.040	1.02	.205	5.21	1.060	26.92	2.330	59.18	5.460	138.68
.048	1.22	.215	5.46	1.130	28.70	2.460	62.48	5.550	140.97

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/114.

FIGURE 1. Connector, right angle plug (.100 inch contact spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Contact identification: See figure 1 (position identification relative to polarizing feature).
Material:
Molded plastic insulator: Type MFH per MIL-M-14.
Pin contact: Brass, CDA260 per QQ-B-613.
(A) Plating:
Pin contact: Gold per MIL-G-45204, type II, grade C, class 1, over nickel plating per QQ-N-290, class 2, 50 to 150 microinches.
Current rating: 3 amperes maximum.
Keying: See Mil-C-55302/116.

Mating and unmating: The maximum mating force in pounds shall be the number of contacts multiplied by .50 and the minimum unmating force shall be .06 times the number of contacts and shall not exceed the measured mating force.

Contact resistance: The average contact resistance of all contracts shall not exceed .010 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: 3 pounds, minimum.

Dielectric withstanding voltage:
Sea level: 600 volts rms.
High level: 300 volts rms.

Part number: M55302/115- (dash number from figure 1).

Replacement data: The connectors covered by this specification were formerly identified with printed circuits as ML2B( ) P -( ).

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review Activities:
Army - MI, AR
Navy - AS, OS
Air Force - 11, 17, 85, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3095-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.