INCH-POUND
MIL-C-55302/156C
31 October 1988

SUPERSEDING
MIL-C-55302/156B
08 March 1985

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, DECADE INCREMENTS 10 THRU 120, 150, 160 AND 180 CONTACT POSITIONS FOR PRINTED WIRING BOARDS (.075 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

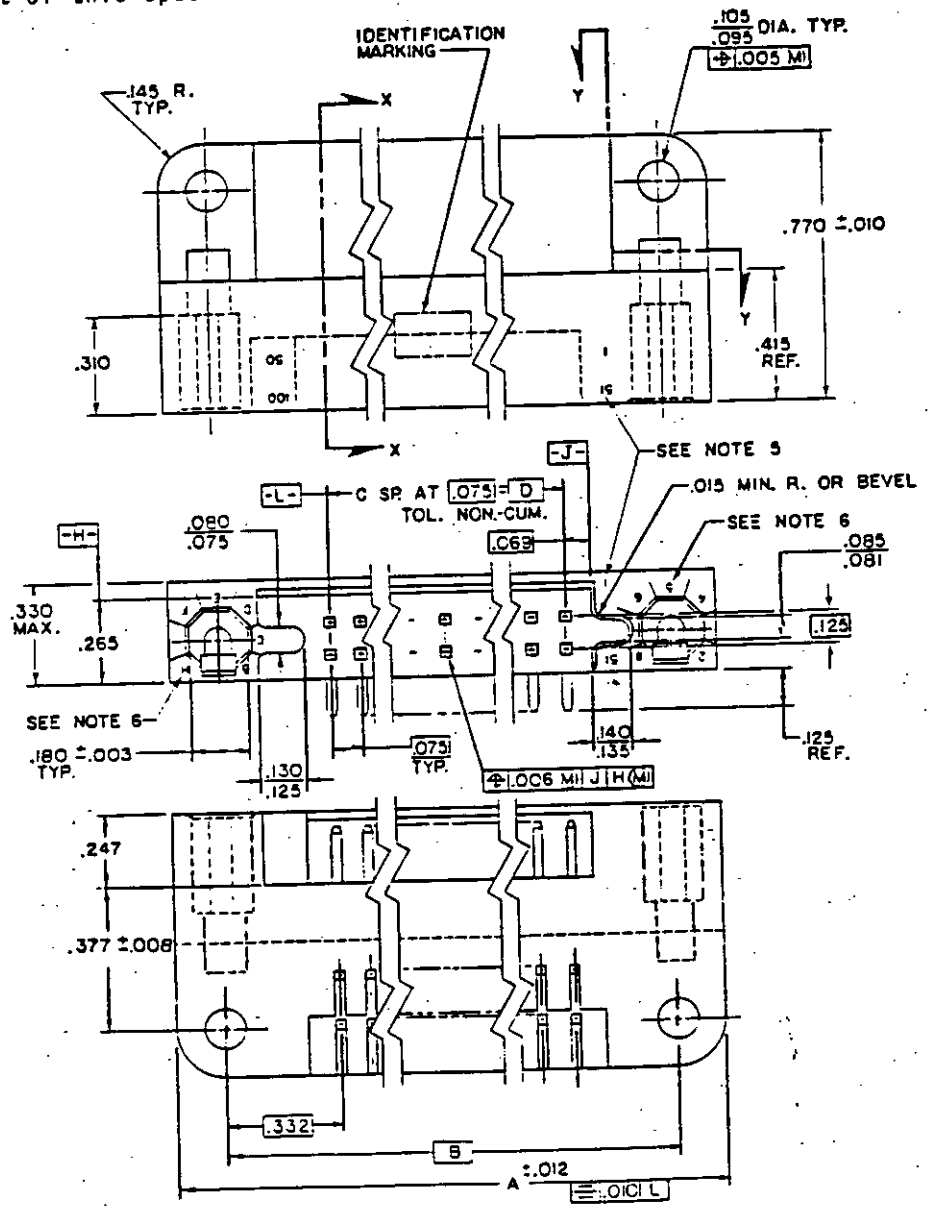


FIGURE 1. Connector plug, type I (.075 spacing).

Ⓒ denotes changes

FSC 5935
AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.


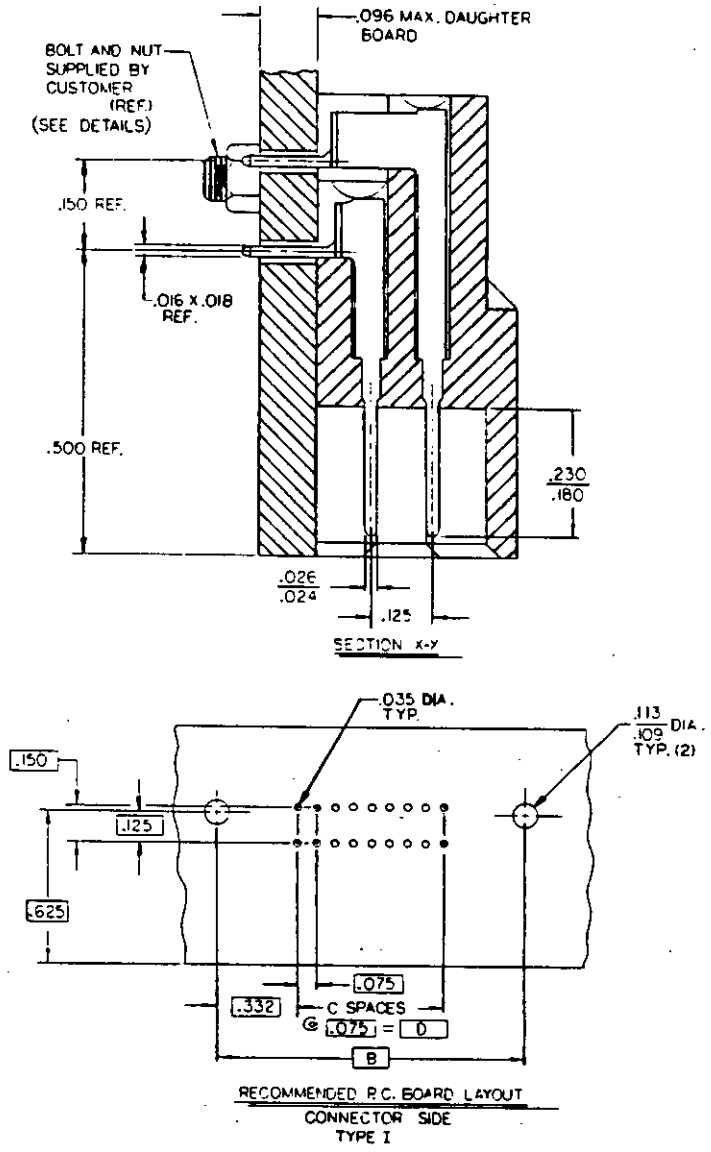


FIGURE 1. Connector plug, type I (.075 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

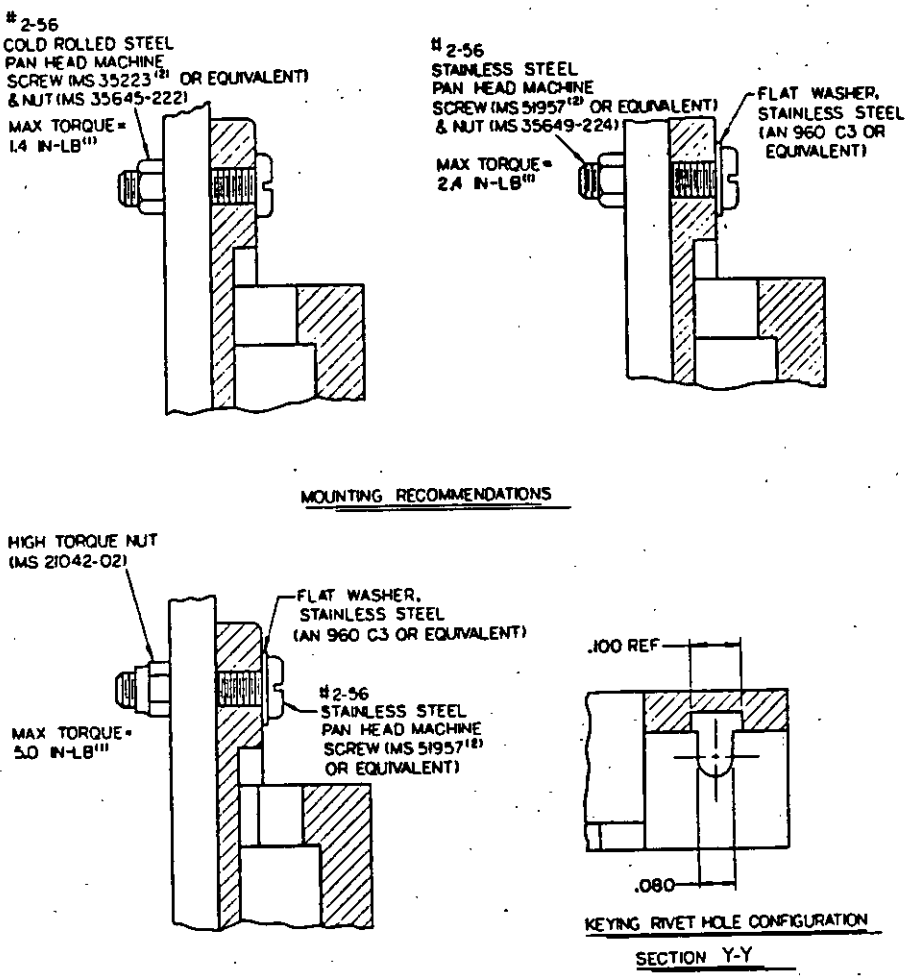

(1) TORQUE WRENCH MUST BE USED WHEN FASTENING CONNECTOR TO PRINTED CIRCUIT BOARD

(2) LENGTH TO BE DETERMINED BY USER

FIGURE 2. Connector plug, type I (.075 spacing) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.035	0.89	.109	2.77	.247	6.27
.005	0.13	.069	1.75	.113	2.87	.265	6.73
.006	0.15	.075	1.91	.125	3.18	.310	7.87
.008	0.20	.080	2.03	.130	3.30	.330	8.38
.010	0.25	.081	2.06	.135	3.43	.332	8.43
.012	0.30	.085	2.16	.140	3.56	.377	9.58
.015	0.38	.095	2.41	.145	3.68	.415	10.54
.016	0.41	.096	2.44	.150	3.81	.500	12.70
.018	0.46	.100	2.54	.180	4.57	.625	15.88
.024	0.61	.105	2.67	.230	5.84	.770	19.56
.026	0.66						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/24 and /25.
5. Numbers indicating every 5 cavities stamped on side. Numbers indicating end cavities and line indicating every 5 cavities stamped on mating face.
6. Key locations embossed on indicated surfaces.

FIGURE 1. Connector plug, type I (.075 spacing) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

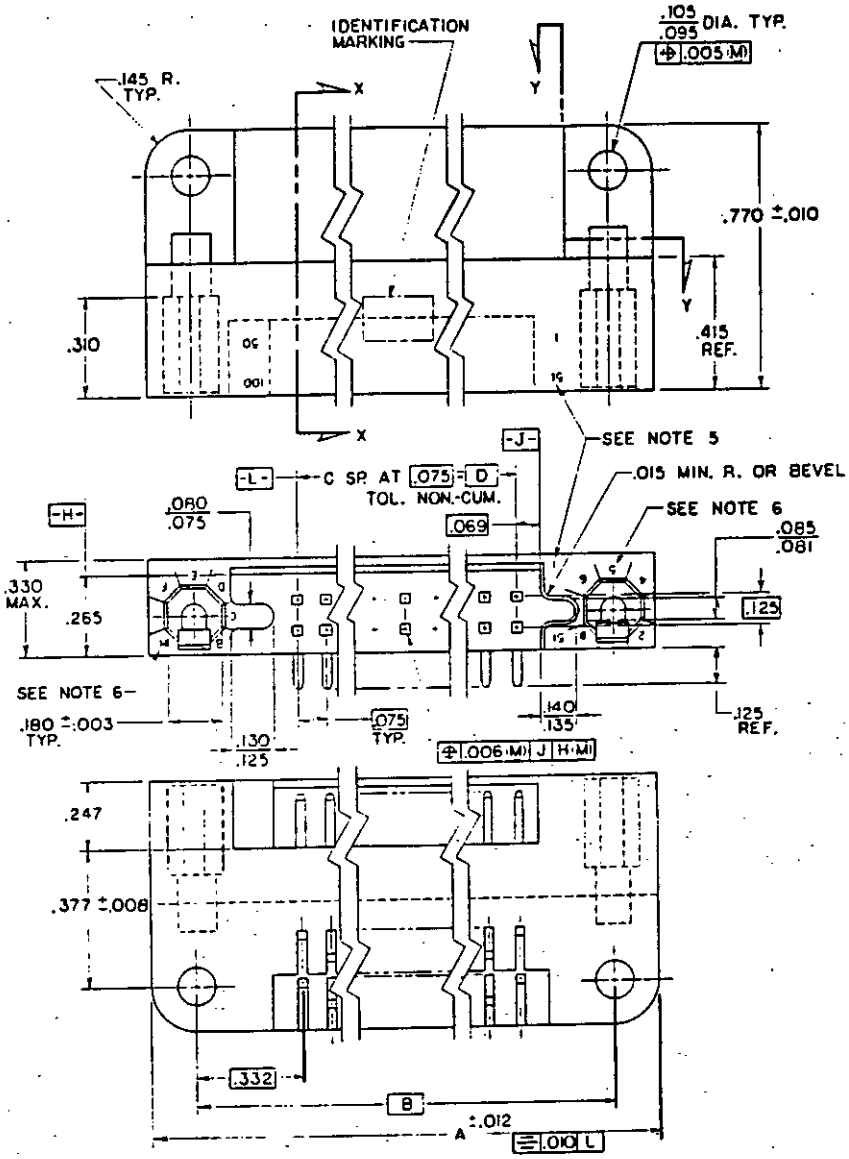


TYPE II

FIGURE 2. Connector plug, type II (.075 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

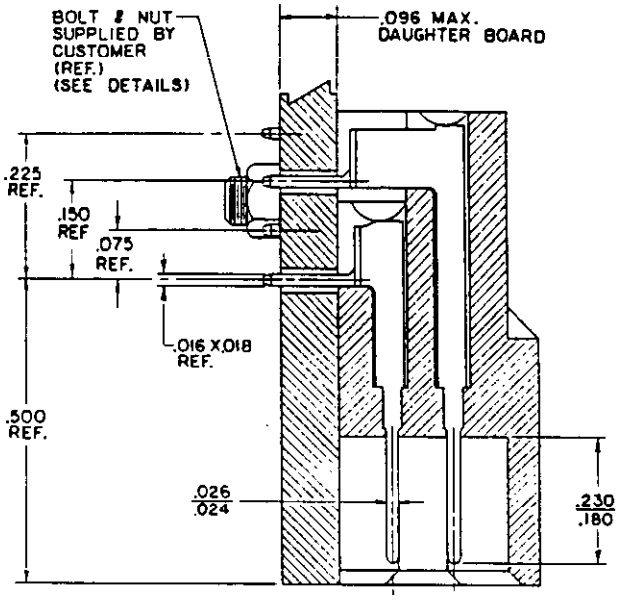


SECTION X-X

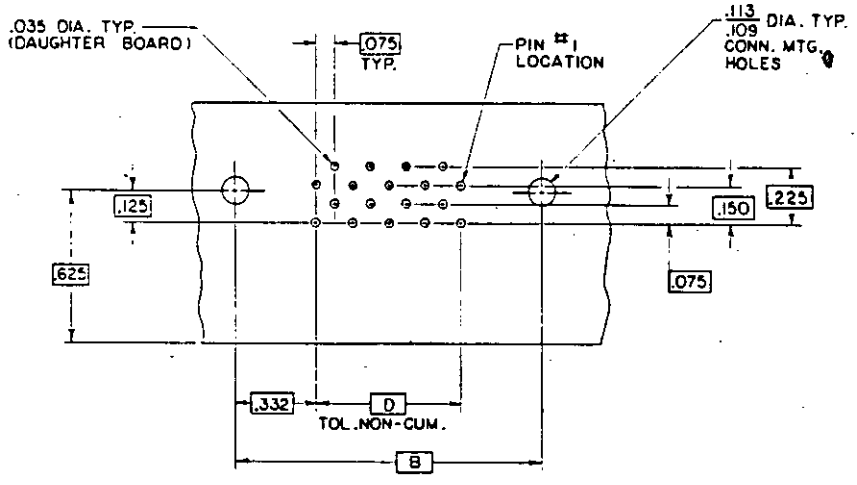

RECOMMENDED P.C. BOARD LAYOUT (CONN. SIDE)
TYPE II

FIGURE 2. Connector plug, type II (.075 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

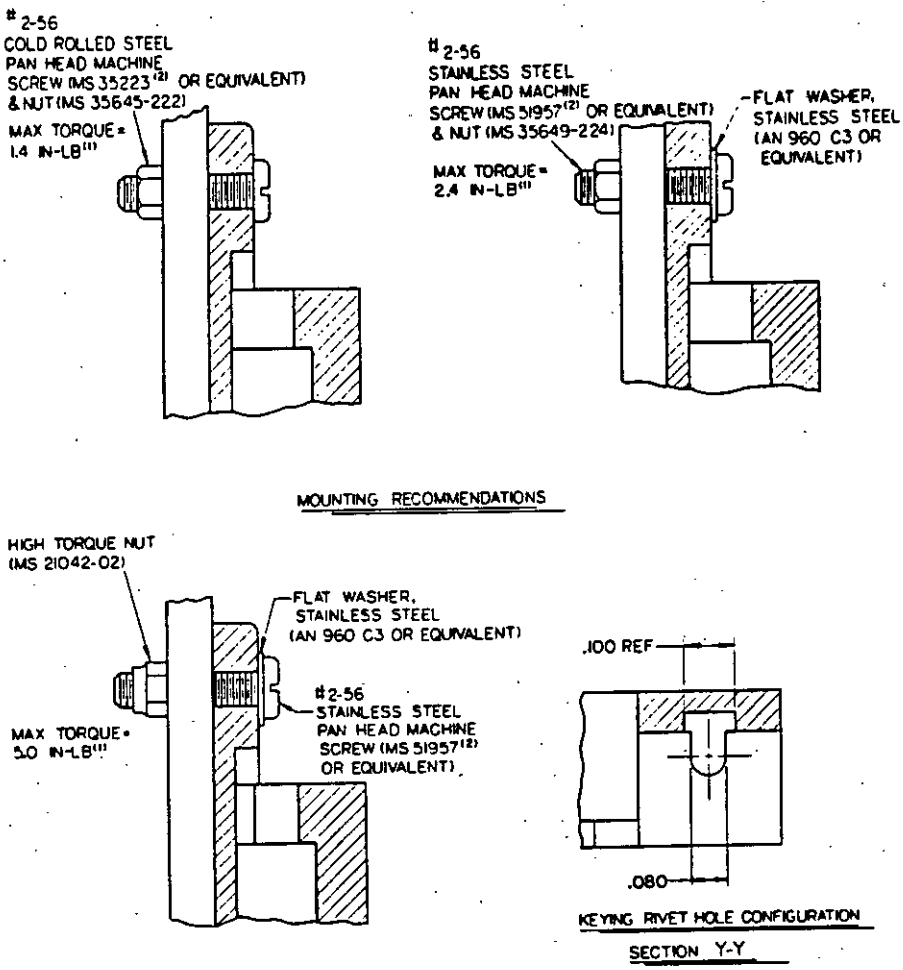

(1) TORQUE WRENCH MUST BE USED WHEN FASTENING CONNECTOR TO PRINTED CIRCUIT BOARD

(2) LENGTH TO BE DETERMINED BY USER

FIGURE 1. Connector plug, type II (.075 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.035	0.89	.113	2.87	.265	6.73
.005	0.13	.069	1.75	.125	3.18	.310	7.87
.006	0.15	.075	1.91	.130	3.30	.330	8.38
.008	0.20	.080	2.03	.135	3.43	.332	8.43
.010	0.25	.081	2.06	.140	3.56	.377	9.58
.012	0.30	.085	2.16	.145	3.68	.415	10.54
.015	0.38	.095	2.41	.150	3.81	.500	12.70
.016	0.41	.096	2.44	.180	4.57	.625	15.88
.018	0.46	.100	2.54	.225	5.72	.770	19.56
.024	0.61	.105	2.67	.230	5.84		
.026	0.66	.109	2.77	.247	6.27		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/24 and /25.
5. Numbers indicating every 5 cavities stamped on side. Numbers indicating end cavities and line indicating every 5 cavities stamped on mating face.
6. Key locations embossed on indicated surfaces.

FIGURE 2. Connector plug, type II (.075 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Table I. Dash number and dimensions, types I and II

Dash number	Type number	Number of contacts	A	B	C	D	Contact identification numbers
-01 -16	I II	10	1.255 (31.88)	.965 (24.51)	4	.300 (7.62)	1, 6
-02 -17	I II	20	1.630 (41.40)	1.340 (34.04)	9	.675 (17.14)	1, 11
-03 -18	I II	30	2.005 (50.93)	1.715 (43.56)	14	1.050 (26.67)	1, 16
-04 -19	I II	40	2.380 (60.45)	2.090 (53.09)	19	1.425 (36.20)	1, 21
-05 -20	I II	50	2.755 (69.98)	2.465 (62.61)	24	1.800 (45.72)	1, 26
-06 -21	I II	60	3.130 (79.50)	2.840 (72.14)	29	2.175 (55.24)	1, 31
-07 -22	I II	70	3.505 (89.03)	3.215 (81.66)	34	2.550 (64.77)	1, 36
-08 -23	I II	80	3.880 (98.55)	3.590 (91.19)	39	2.925 (74.30)	1, 41
-09 -24	I II	90	4.255 (108.08)	3.965 (100.71)	44	3.300 (83.82)	1, 46
-10 -25	I II	100	4.630 (117.60)	4.340 (110.24)	49	3.675 (93.34)	1, 51
-11 -26	I II	110	5.005 (127.13)	4.715 (119.76)	54	4.050 (102.87)	1, 56
-12 -27	I II	120	5.380 (136.65)	5.090 (129.29)	59	4.425 (112.40)	1, 61
-13 -28	I II	150	6.505 (165.23)	6.215 (157.86)	74	5.550 (140.97)	1, 76
-14 -29	I II	160	6.880 (174.75)	6.590 (167.39)	79	5.925 (150.50)	1, 81
-15 -30	I II	180	7.630 (193.80)	7.340 (186.44)	89	6.675 (169.54)	1, 91

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1, 2, and table I.

Material: In accordance with MIL-C-55302.

© Plating: The contact plating for the engagement area, (.150 inch minimum length) shall be gold over nickel per MIL-C-55302. The contact area between the engagement area and the solder tail shall be nickel per MIL-C-55302. The contact plating for the solder tail area shall be tin lead over nickel per MIL-C-55302.

Contact identification: See figures 1, and 2.

© Contact rating: 3.0 amperes maximum per contact, 2.25 amperes continuous per contact at 75°F.

Mating and unmating: The maximum mating force in pounds shall be the number of contacts multiplied by .25 and the withdrawal force in pounds shall be a minimum of .025 times the number of contacts and shall not exceed the measured insertion force.

Contact resistance: No individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: 3 pounds minimum.

Dielectric withstanding voltage:
Sea level - 900 volts rms.
High altitude - 200 volts rms.

Keying: See MIL-C-55302/31.

Part number: M55302/156 - (and dash number from table I).

Patent number 3,404,367. The Government has a royalty-free license under the above patent for the benefit of manufacturers of the items called for in this specification, either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 85, 99

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3645-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.