
Ⓐ MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY, FLANGE MOUNTED,
(BETWEEN SERIES BNC PLUG TO SERIES N JACK), CLASS 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the latest issue of Specification MIL-A-55339.

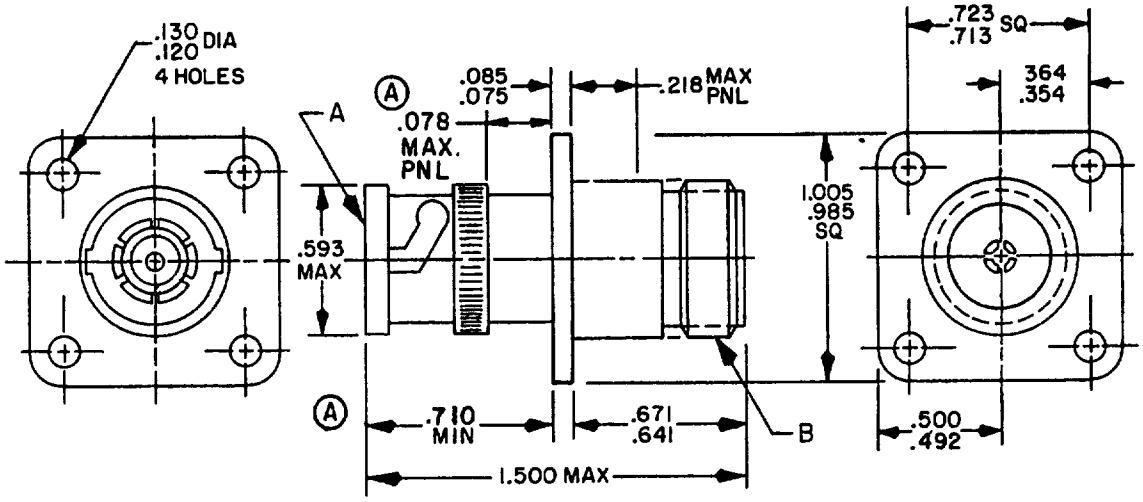

INCHES	MM	INCHES	MM
.075	1.91	.630	16.00
.085	2.16	.641	16.28
.120	3.05	.671	17.04
Ⓐ .130	3.30	.710	18.03
.218	5.54	.713	18.11
.354	8.99	.723	18.36
.364	9.25	.985	25.02
.492	12.50	1.005	25.53
.500	12.70	1.500	38.10
.593	15.06		

Reference	Series	Contact	Figure
A	BNC	Pin	2
B	N	Socket	3


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. All undimensioned pictorial representations are for reference purposes only.

FIGURE 1. General configuration.


Ⓐ denotes change

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

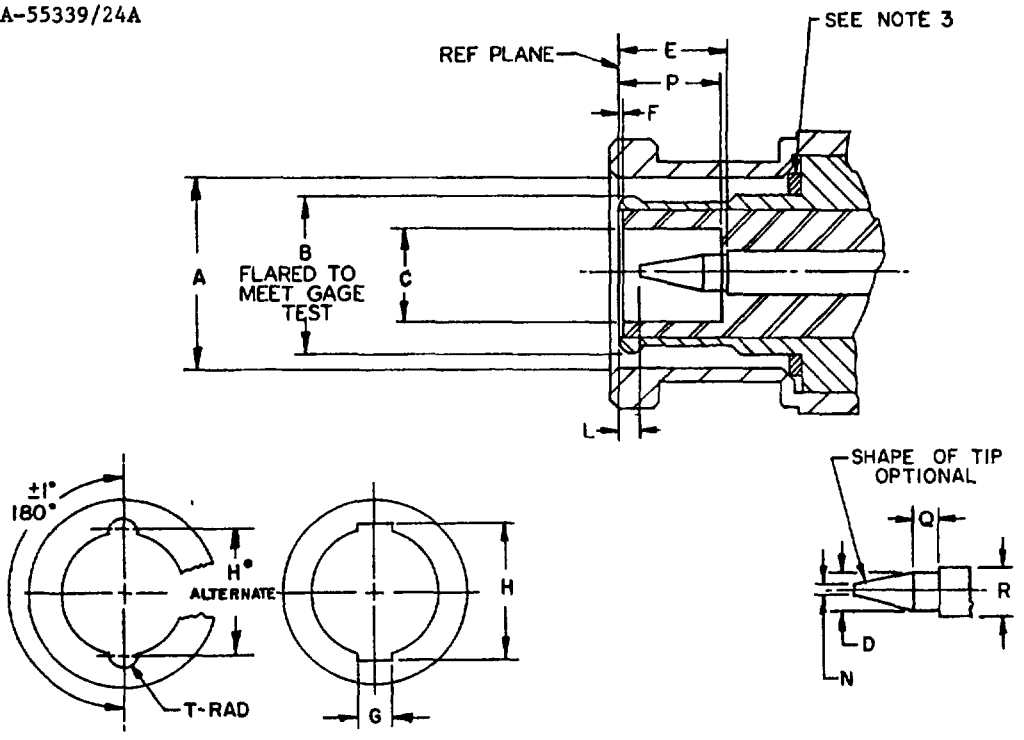


Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.385 (9.78)	.390 (9.91)
B	Gage test	
C	.190 (4.83)	
D	.052 (1.32)	.054 (1.37)
E	.210 (5.33)	.230 (5.84)
F	.006 (.15)	
G	.091 (2.31)	.097 (2.46)
H	.463 (11.76)	.473 (12.01)
H*	.394 (10.01)	.400 (10.16)
Ⓐ U	.180 (4.57)	.184 (4.67)
J	.124 (3.15)	
K	.091 (2.31)	.097 (2.46)
L	.003 (.08)	.040 (102)
M	.018 (.46)	.022 (.56)
N		.025 (.64)
P	.208 (5.28)	228 (5.79)
Q	.078 (1.98)	
R	.081 (2.06)	.087 (2.21)
T	.045 (1.14)	049 (1.24)

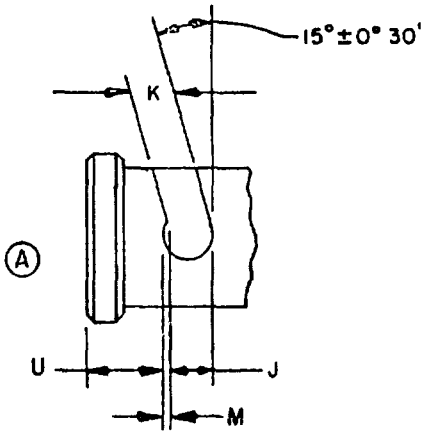


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. In the mated condition the longitudinal force of the spring of the coupling mechanism shall exceed the pressure exerted by the sealing gasket by an amount necessary to insure butting of the outer contacts at the reference plane.
4. All undimensioned pictorial representations are for reference purposes only.
5. Outer contact shall have a minimum of four slots.

FIGURE 2. Mating dimensions for BNC pin contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

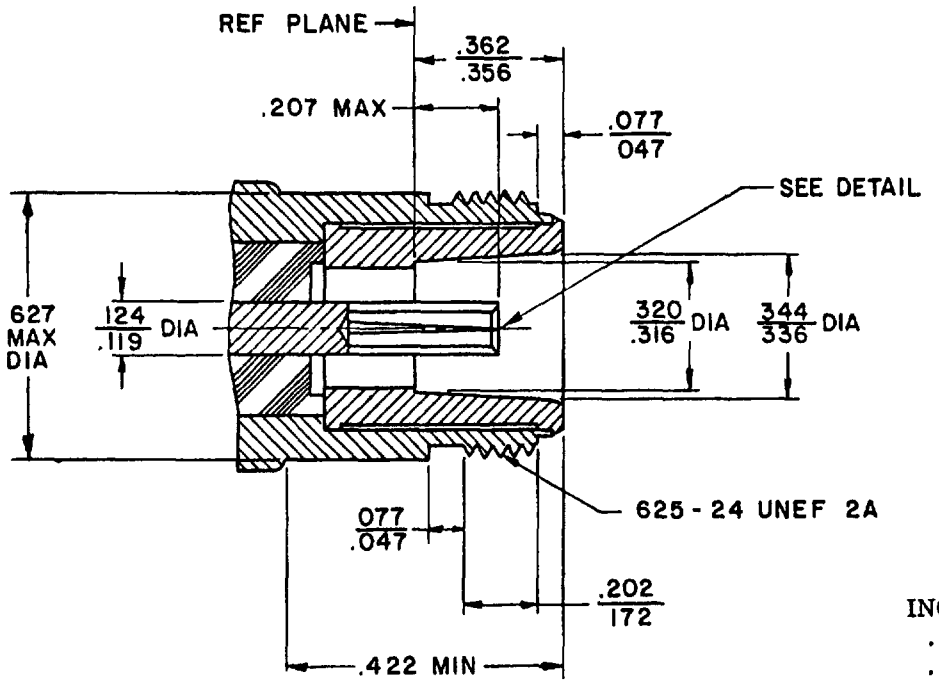

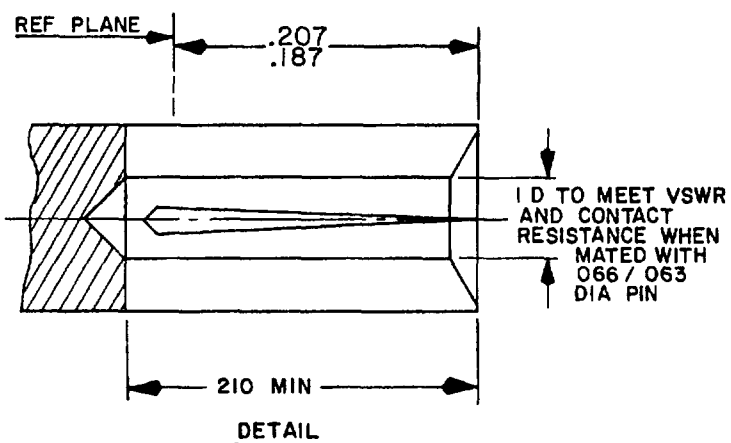

DETAIL

INCHES	MM
.047	1.19
.063	1.60
.066	1.68
.077	1.96
.119	3.02
.124	3.15
.172	4.37
.187	4.75
.202	5.13
.207	5.26
.316	8.03
.320	8.13
.336	8.53
.344	8.74
.356	9.04
.362	9.19
.422	10.72
.625	15.88
.627	15.93

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3 Slitting of inner contact optional
4. All undimensioned pictorial representations are for reference purposes only

FIGURE 3. Mating dimensions for N socket contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nom.

Working voltage: Sea level - 500 Vrms.
70,000 feet - 125 Vrms.

Frequency range: 0 to 4 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque of 6 to 10 in. lb, series N).

Dimensions: See figures 1, 2, and 3.

Center contact retention:	Series BNC	Series N
Axial force (lb, min)	6	6
Torque (in. oz, min)	N/A	N/A

Force to engage and disengage:	Series BNC	Series N
Longitudinal force (lb, max)	3.0	N/A
Torque (in. lb, max)	2.5	6.0

Coupling proof torque: N/A

Mating characteristics, series N:
- Center contact (socket):
  - Oversize test pin dia - .074 in., min.
    - Insertion depth - .125 in., min.
    - No. of insertions - 1.
  - Max test pin (insertion force test), series N:
    - Steel test pin dia - .066 in., min.
    - Pin finish - 16 microinches.
    - Insertion force - 2 lb, max.
    - No. of insertions - 1.
  - Min test pin (withdrawal force), series N:
    - Steel test pin dia - .063 in., max.
    - Pin finish - 16 microinches.
    - Withdrawal force - 2 oz, min.
    - No. of withdrawals - 1.
- Outer contact, series BNC:
  - Min test ring ID - .319 in., max.
    - Ring finish - 16 microinches.
    - Insertion force - 5 lb, max.
    - Insertion depth - .093 in., min.
    - No. of insertions - 1.
  - Max test ring ID - .324 in., min.
    - Test ring finish - 16 microinches.
    - Insertion depth - .031 in., max.
    - No. of insertions - 1.

Permeability: <2.0.

Seal: Hermetic - Not applicable.
Pressurized - Not applicable.
Weatherproof - Not applicable.

Insulation resistance: 5,000 megohms, min.

VSWR: 1.35, max at .5 to 4 GHz.

RF leakage (total): -55 dB, min, 2 to 3 GHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

RF insertion loss: .1 dB, max, 3 GHz
(.006 $\sqrt{F\ (GHz)}$ dB max tested at 3 GHz).

Durability: 500, min.
Rate: 12 c/m, min.

Dielectric withstanding: Test voltage - 1,500 Vrms, min (sea level).

Contact resistance (milliohms, max):

Contact	Initial	After
Center	1.0	1.5
Outer	1.5	N/A

Vibration, high frequency: Interruptions - 1 µs, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, min.

Corona level: Voltage - 375 V, min.
Altitude - 70,000 feet, min.

RF high potential withstanding voltage: RF voltage - 1,000 Vrms, min.
Frequency - 5 MHz, min.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: Not applicable.

MARKING: As specified in MIL-A-55339.
Part No. M55339/24-00335.

TABLE I. Cross reference of part numbers.

Part number	Superseded part number or type designation 1/
M55339/24-00335	REB49103 UG-335A/U

1/ The superseded part number or the type designation is for cross reference only. Where a superseded part number or type designation is not given, none was assigned or will be assigned. The part number M55339/24-00335 shall be used in all cases for marking and identifying the adapter.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH, OS
Air Force - 11, 99
DLA - ES

User activities:
Army - AT
Navy - SH, AS, MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3057-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-A-55339/24A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN. DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:06Z
Check the source to verify that this is the current version before use.