MIL-C-24012B(MC)
12 February 1985
SUPERSEDING
MIL-C-24012A(MC)
27 August 1971

MILITARY SPECIFICATION

CAPS, GARRISON: MEN'S, POLYESTER/WOOL

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for polyester/wool garrison caps.

1.2 Classification. The caps shall be of one type in the following classes and sizes as specified (see 6.2):

Class 1 - Cap, Tropical Polyester/Wool, Green 2241
Class 2 - Cap, Gabardine, Polyester/Wool, Green 2240

Schedule of sizes

6-3/8	6-7/8	7-3/8
6-1/2	7	7-1/2
6-5/8	7-1/8	7-5/8
6-3/4	7-1/4	7-3/4

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions), and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
V-T-301	- Thread, Silk.
CCC-C-461	- Cloth, Twill, Uniform, Cotton.
DDD-L-20	- Label; For Clothing, Equipage, and Tentage, (General Use).

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon.
MIL-C-10176	- Cloth, Gabardine, Wool, Polyester and Wool.
MIL-C-10296	- Cloth, Sateen, Cotton.
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes).
MIL-C-21115	- Cloth, Tropical: Wool, Polyester/Wool.

STANDARDS

FEDERAL

FED-STD-751	- Stitch, Seam and Stitching.

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-147	- Palletized Unit Loads.
MIL-STD-901	- Provisions for Evaluating Quality of Caps, Garrison, Men's.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies of the Manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association Inc., Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Standard samples. The standard sample is furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article, consisting of the number of finished caps specified by the procuring activity (see 6.2), shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of the specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material for class 1 caps shall be 10.0 ounce tropical polyester/wool, green shade 2241 conforming to type III, class 3 of MIL-C-21115. The basic material for the class 2 caps shall be 9.5 ounce gabardine, polyester and wool, green shade 2240 conforming to type II, class 8 of MIL-C-10176.

3.3.2 Lining. The material for lining the caps shall be cloth, rayon twill, 3.7 ounce, green shade 2208 (see 6.3), conforming to class 1 of MIL-C-368.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

3.3.3 Sweatband. The material for the sweatband shall be cloth, cotton, uniform twill, green shade 2224 (see 6.3), 8 ounce, conforming to type III of CCC-C-461, except the requirements for colorfastness to bleaching and light shall not apply or cloth, sateen, cotton, olive green shade 107 conforming to class 1 of MIL-C-10296.

3.3.4 Threads.

3.3.4.1 Cotton thread. The cotton thread used for inside seaming shall be type IC2, 3 ply, ticket No. A and for overedging type IA3, 2 ply, ticket No. 70 conforming to V-T-276.

3.3.4.2 Silk thread. The silk thread used for topstitching the top crown and hemming the curtain shall be type I, 3 ply, size A conforming to V-T-301.

3.3.4.3 Color and colorfastness. The cotton and silk thread shall be green shade T-1, Cable No. 66023. The threads, when tested in accordance with the applicable thread specification, shall show good fastness to wet-dry cleaning and light.

3.3.5 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores. The flange of the eyelet shall be enameled a shade to closely match the shade of the basic material (see 3.3.1), or the entire eyelet may be enameled. Eyelets with a washer may be used. The eyelets shall conform to the following dimensions (see Section 4, Table IV for required tests):

Outside diameter of barrel, inch:	0.185 ± 0.004
Outside diameter of flange, inch:	0.312 ± 0.005
Length of barrel under flange, inch:	0.145 ± 0.004
Metal thickness, inch:	0.008 ± 0.001

3.3.6 Labels. Each cap shall have a combination identification, instruction and size label conforming to type VI, class 4 of DDD-L-20 except the content shall include the name of contractor 1/ and the Wool Products Act information. The label shall measure not less than 1-3/4 by 1-1/4 inches, with a minimum 1/4-inch margin at the top edge for sewing. The caps are intended to be dry cleaned and shall show fastness to dry cleaning.

Nomenclature (item identification)
Contract number
Name of contractor
Size
National Stock Number
Wool Product Act
DRY CLEAN ONLY

1/ Size of characters for name of contractor shall be minimum 6 point (approximately 1/16 inch).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

3.4 Design. The cap shall be the U. S. Marine Corps design shown on Figure 1.

3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the working patterns. The standard patterns provide 1/4-inch seam allowance, except as otherwise specified in Table I, show size and are marked or notched for the proper cutting, placement, and assembly of the component parts.

3.5.1 List of pattern parts. Caps shall be cut from materials specified herein in accordance with the pattern parts indicated below:

Pattern Nomenclature

Item	Basic material	No. of cut parts
1.	Side crown	2
2.	Curtain	2
3.	Top crown	1
	Material: Cloth, Rayon Twill	
4.	Lining, side crown	2
5.	Lining, top crown	1

3.6 Construction. The caps shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps.

3.6.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.1 Serge stitching. Serge stitching shall be done on serging machines having a knife attachment properly set to trim the raveled edge without cutting the material.

3.6.1.2 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

3.6.2 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the cap. Any method of shade marking may be used except:

(a) Corrosive metal devices.
(b) Adhesive-type tickets which show discoloration and adhesive mass which adheres to the material upon removal of the tickets.
(c) Sew-on shade tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the cap in strict accordance with the patterns furnished by the Government. b. Cut the material in the direction indicated by directional lines on the patterns. c. Cut the wool parts of the cap from one piece of the basic material. d. Cut the lining for the cap from one piece of the rayon twill material. e. Cut the sweatband on the straight (warp or filling direction) of the cotton material. The sweatband shall be cut 1-5/8 inches wide and sufficiently long in order to lap the ends 3/4 inch, with the top end turned under not less than 3/4 inch.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Replacement of damaged parts.					
	a. Replace, at time of cutting, all parts of the cap or lining materials containing holes, serious weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into a hole, shade bars, dye streaks or unslightly slubs, etc., affecting appearance.					
	b. Replace any part damaged during manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns and large drill holes in the material affecting appearance.					
3.	Shade marking.					
	a. Mark all component parts as specified in 3.6.2, in order to insure a uniform shade and size throughout the cap and proper assembly.					
4.	Make curtain.					
	Finished appearance. The curtain shall be uniformly stitched and shall be smooth and flat without twists, gathers, puckers, or pleats.					
	a. The curtain shall be made of two plies of basic material.					
	b. Position the two plies face to face, with edges even and notches matching. Stitch together with a 1/4-to 5/16-inch seam along the upper edges.	301 or 101	SSe-2 (a)	12-16 or 10-14	A	A
	c. Turn curtain, forcing out the seam. Uniformly edgestitch 1/8 inch from seamed edge.	301 or 101	SSe-2 (b)	12-16 or 10-14	A (silk)	A
	d. Close bottom of curtain uniformly with 3/16- to 1/4-inch seam.	301 or 101	SSa-1	12-16 or 10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Join ends of curtain.					
	Finished appearance. The ends of the curtain shall be joined without twists, fullness, or puckers.					
	a. Lap the left end of the curtain over the outside of the right end, with the bottom edges even and the front notches matching. Seam together along the bottom 1/8 to 3/16 inch from the raw edge.	301	SSa-1	12-16	A	A
6.	Make top crown.					
	Finished appearance. The top crown lining shall not be tight, short, or twisted, affecting smoothness on the outside of crown. The folded edge of top crown-lining assembly shall be stitched without twists, puckers, pleats, or distortion.					
	a. Top crown shall be made of one ply of basic material and one ply of lining material.					
	b. Position lining and underside of crown, with edges even and notches matching. Seam together 1/8 inch from raw edges.	301	SSa-1	12-16	A	A
	c. Fold crown-lining assembly in half lengthwise with lining side out. Stitch along folded edge from end to end. The line of stitching shall taper from zero at each end to 1/8 to 3/16 inch from folded edge at the center.	301	OSf	12-16	A	A
	d. Stitch the folded top crown-lining assembly 5/8 to 3/4 inch from raw edge.	301	SSa-1	12-16	A	A
7.	Join top and side crowns.					
	Finished appearance. The top and side crowns shall be joined together without twists, puckers, pleats, or distortion.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Join top and side crowns. (con't)					
	a. Position the left and right side crown on the outside of the respective top crown, with top edges even and the point at each end of the top crown matching the notches in the side crowns.					
	b. Join the left and right side crowns, respectively, to the top crown with a 1/4-inch seam, beginning and ending on the top crown 1/4 inch from each end.	301 or 101	LSq-2 (a)	10-14 or 6-10	A	A
8.	Join side crown lining to cap.					
	Finished appearance. The side crown lining shall be joined to the cap without twists, puckers, pleats or distortion.					
	a. Position the left and right side crown lining, respectively, on the lining side of top crown, with edges even and notches matching, and join to the top crown-side crown seam outlet with a 1/4-inch seam. The seam shall begin and end on the center fold of the top crown 1/4 inch from each end.	301	SSa-1	10-14	A	A
9.	Join ends of side crown.					
	Finished appearance. The ends of side crown shall be joined together without twists, puckers, pleats, or distortion. The center of the top crown shall be in line with the front and back seams of cap. The stitching shall not extend to the top edge of the side crown.					
	a. Join the left and right side crowns at front and back ends of cap with a 3/8-inch seam at the lower end, tapering to 1/4 inch at the top crown joining stitch.	301	SSz-3(a)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10.	Join ends of side crown lining. Finished appearance. The ends of the side crown lining shall be joined without twists, puckers, pleats, or other distortion.					
	a. Join the left and right side crown lining at front and back ends of cap with a 3/8-inch seam at the lower end tapering to 1/4 inch at the top crown joining stitch.	301	SSa-1	10-14	A	A
11.	Topstitch side crown. Finished appearance. The side crown shall be uniformly topstitched. The side crown lining at front and back ends of cap shall not be caught in the topstitching.					
	a. Turn cap right side out, working out the upper front and back corners. Spread open the seam at each end of cap and topstitch the left and right side crowns, respectively, 1/16 inch from the raised edge, catching the outlet in the stitching. The topstitching at each end of cap shall not be through the side crown lining. b. On the finished cap, the width of the top crown shall be 3/4 to 1 inch, measured from raised edge of side crowns with the spread fully extended.	301	SSz-3 (b) (ends LSq-2 (b) (raised edge)	10-14	A (silk)	A
12.	Join lining to side crown. Finished appearance. The lining shall be joined to side crown without twists, puckers, pleats or other distortion. The front and back seams of lining and side crown shall match.					
	a. Turn cap wrong side out, matching the front and back lining seams to the respective crown seam. Join lining to side crown 1/4 inch from raw bottom edge of crown, with the front and back seams of side crown lining turned flat against the respective side crown seams and the ends caught in the stitching.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13.	Join curtain to cap. Finished appearance. The curtain shall fit close to sides of the cap without pleats or puckers. The right and left ends of the curtain shall cross at the center front 1/2 inch below the top end of the side crown seam. a. Turn the cap right side out and position the curtain on the outside with bottom edge even and notches in curtain matching the front seam. b. Join the curtain to the cap through the lining with a 3/8-inch seam, and with the front and back seams turned flat against the body of the cap and caught in the stitching.	101	SSa-1	6-10	A	A
	c. On the finished cap, the left end of the curtain shall overlap the right end 4-1/2 + 1/4 inches, as indicated on Figure 1, measured along the bottom finished edge of the cap.					
14.	Join sweatband to cap. Finished appearance. The sweatband shall be smoothly and evenly stitched to the cap, without wrinkles, puckers, gathers, twists, or other distortion. The sweatband shall cover the raw bottom edge of the curtain, with the lower edge of sweatband 1/8 to 3/16 inch above the bottom finished edge of cap. The ends of the sweatband shall finish to the right or left of, but not on, the back seam for the crown and shall lap each other not less than 3/4 inch with the top end turned under not less than 3/4 inch. The combination identification, instruction and size label shall be placed to the right or left of the back seam of the crown with the top end under the sweatband.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14.	Join sweatband to cap. (con't)					
	a. Turn down the curtain and properly position the 1-5/8-inch-wide strip of cotton material for the sweatband on the inside of the cap. Stitch the sweatband to the cap with a double row of stitches, turning under the top and bottom edges, lapping the ends, turning under the top end and catching the turned-under edges and top end in the stitching 1/16 to 1/8 inch from the top and bottom folded edges. The combination identification, instruction and size label shall be properly positioned, with the top end placed under the sweatband and caught in the top row of stitches.	301	LSd-1 (each edge)	10-14	A	A
	b. Turn up the curtain.					
	c. On the finished cap, the sweatband shall be 1±1/8 inches.					
15.	Clean cap.					
	a. Pull and remove all basting thread. Trim all ends of stitching and remove all loose ends of thread from the cap. Remove all spots, stains, shade tickets and markings without injury to the material.					
16.	Press caps.					
	Finished appearance. The top crown shall not extend beyond the topstitched upper edge of side crowns. The front and back of cap curtain shall not be creased.					
	a. Insert a side shaper between the cap curtain and each side crown, and spread the curtain smoothly and evenly on the shaper.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16.	Press caps. (cont'd) b. Press the cap smooth and flat with a heated pressing machine or heated pressing iron, carefully folding and creasing the bottom edge. The pressing shall be done in such a manner that the seams joining side crowns to top crown will finish at the top edge of cap and the sweatband will not be exposed beyond the bottom edge of cap. c. Remove all pressing marks.					
17.	Attach eyelet to curtain. Finished appearance. The eyelet shall be properly positioned and securely attached through the outside of the left side of the curtain and securely clinched on the inside without distorting and cutting material or splitting the flange of the eyelet. a. Mark the left side of the curtain 1-1/4±1/8 inches from the top edge 2 +1/4-1/8 inches from front of cap when laid flat as shown in Figure 1. b. Attach the metal eyelet to the curtain at the mark.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished caps shall conform to the measurements shown in Table II.

Table II - Finished measurements

Size	Head measurements 1/	Height of cap at center 2/	Height of curtain 3/ front	Height of curtain 3/ back
	inches	inches	inches	inches
6-3/8	20-1/8	4-7/8	2-3/8	2-7/8
6-1/2	20-1/2	4-7/8	2-3/8	2-7/8
6-5/8	20-7/8	4-7/8	2-3/8	2-7/8
6-3/4	21-1/4	4-7/8	2-3/8	2-7/8
6-7/8	21-5/8	4-7/8	2-3/8	2-7/8
7	22	4-7/8	2-3/8	2-7/8
7-1/8	22-3/8	4-7/8	2-3/8	2-7/8
7-1/4	22-3/4	4-7/8	2-3/8	2-7/8
7-3/8	23-1/8	4-7/8	2-3/8	2-7/8
7-1/2	23-1/2	4-7/8	2-3/8	2-7/8
7-5/8	23-7/8	4-7/8	2-3/8	2-7/8
7-3/4	24-1/4	4-7/8	2-3/8	2-7/8
Tolerance	+1/4 -1/8	+1/4 -1/8	+1/4 -1/8	+1/4 -1/8

1/ Head measurements shall be taken with a gage (see 6.4).

2/ Height of cap measurement shall be taken at the center of the cap from the folded edge at the bottom of the curtain to the raised edge of the side crown.

3/ Height of curtain measurments shall be taken at the location for the front and back seams from the folded bottom edge to the folded top edge of the curtain.

3.8 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality level (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsibile for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Inspection shall be in accordance with provisions set forth in MIL-STD-901, except where otherwise indicated herein.

4.4 First article. When first article is required, inspection and testing shall be made on a completely fabricated cap of each class for all provisions of this specification applicable to end product examination and test.

4.5 Quality conformance inspections.

4.5.1 Component and material testing. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of reference specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components listed in Table III for characteristics noted. All requirements are applicable to the sample unit. All test reports shall contain the individual values utilized in expressing the final results.

4.5.2 Sampling for testing. Sampling shall be in accordance with MIL-STD-901 except for components specified below. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein. The unit for expressing lot size and sample unit for testing each component shall be in accordance with the following:

Component	Lot size expressed as	Sample Unit for Testing
Eyelets	1000	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

TABLE III - Test Methods

Components	Characteristic	Rqmt. para.	Test method	Determinations per sample unit	Results reported are:
Eyelets	Material identification 1/	3.3.5	Std. Com'l	1	Pass or fail
	Flange color	3.3.5	Visual	1	Pass or fail
	Barrel				
	Scores	3.3.5	Visual	1	Pass or fail
	Outside diameter	3.3.5	Std. Com'l	1	Pass or fail
	Length	3.3.5	Std. Com'l	1	Pass or fail
	Flange				
	Outside diameter	3.3.5	Std. Com'l	1	Pass or fail
	Metal thickness	3.3.5	Std. Com'l	1	Pass or fail

1/ A certificate of compliance will be acceptable for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

4.5.3 Examination of the end item. The end item examination for the finished caps shall be as specified in MIL-STD-901.

4.5.4 Finished measurements. Any measurement deviating from the nominal dimension and tolerance specified in Table II. shall be classified as a measurement defect.

4.5.5 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-901.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each cap shall be placed in an individual polyethylene bag measuring approximately 6 inches wide by 15 inches long with a 1-inch lip at the open end along the 6-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. The caps shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. One hundred twenty-five (125) caps of one class and size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, size No. 2A or MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container.

5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers, (750 caps of one class and size only) shall be packed in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. One hundred twenty five (125) caps of one class and size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class domestic, size No. 2A of MIL-B-17757, assembled and closed as specified in the appendix thereto. Fiberboard used to fabricate the boxes shall be grade 275. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules, National Motor Freight Classification Rule and U. S. Postal Services Manual, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Nomenclature
Size _____ Stock Number _____ Class _____
Contract Number
Name of contractor

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

5.4 Palletization. When specified (see 6.2), caps packed as specified in 5.2 shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The caps are intended for wear by enlisted male personnel of the Marine Corps.

6.2 Ordering data.

6.2.1 Acquisition requirements. The acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of caps in first article (see 3.2).
(e) Selection of applicable level of packaging and packing (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).
(g) When palletization is required (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph no.	Data requirements	Applicable DID no.	Options
(a) 4.	Inspection System Program Plan	DI-R-4803	------
(b) 4.4	First Article Inspection Procedures	DI-T-4901	------
(c) 4.4	First Article Inspection Report	DI-T-4902	------
(d) 4.5	Production/Acceptance Inspection Procedures	DI-T-4903	------
(e) 4.5	Production Inspection Reports	DI-T-4904	-------

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard samples. For information regarding the availability of a sample of the cap and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Gages. Information concerning the gages may be obtained upon request to the contracting officer.

6.5 First article. Examinations, test, and approval shall be as specified by the contracting officer (see 3.2).


6.6 Figures. The figure is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issues. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:
Navy-MC
Project No. 8405-N951

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

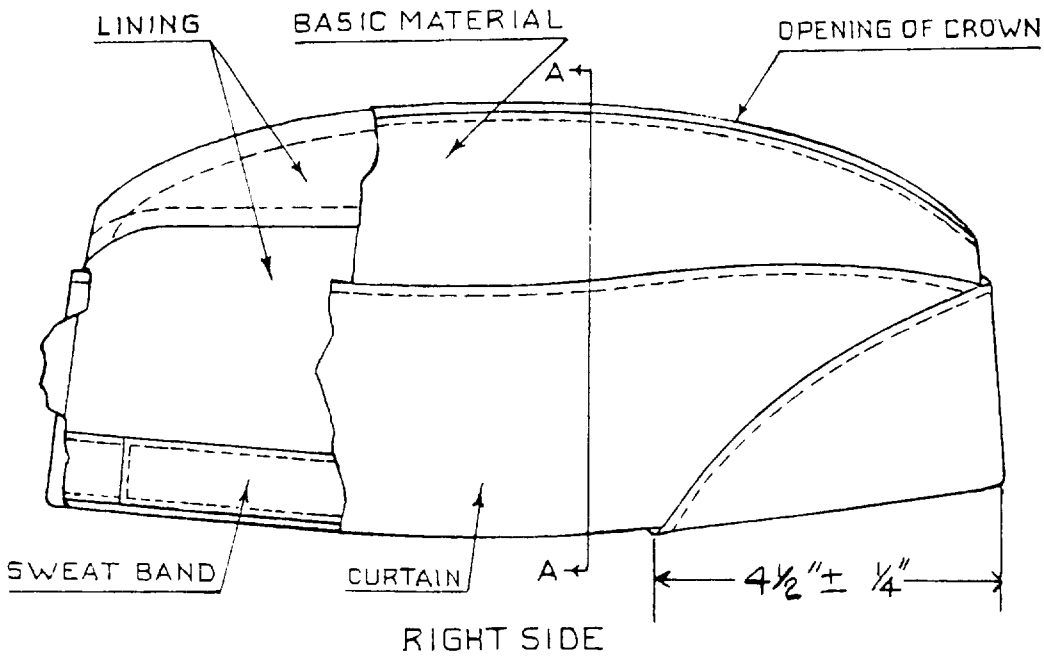

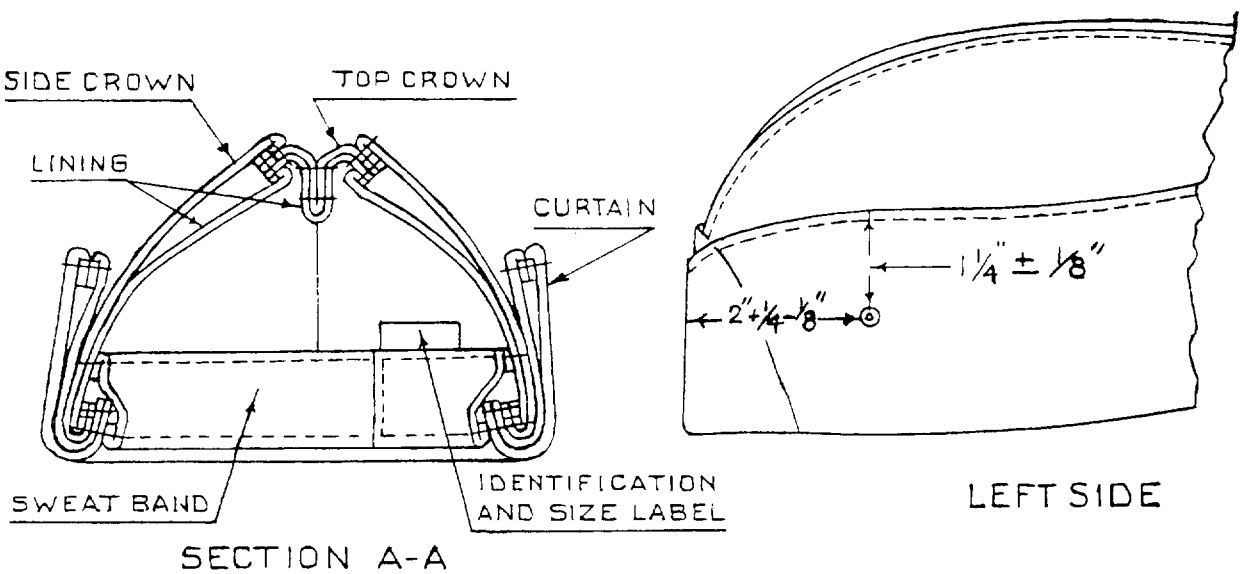


FIGURE 1. CAPS, GARRISON: MEN'S, POLYESTER/WOOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-24012B(MC)	Caps, Garrison: Men's, Polyester/Wool

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U.S. Marine Corps
Attn: Code LMA-1
Washington, D. C. 20380

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:43Z
Check the source to verify that this is the current version before use.