
MILITARY SPECIFICATION SHEET

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, FLAT PACK

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the power divider/combiners described herein shall consist of this document and the latest issue of specification MIL-P-23971.

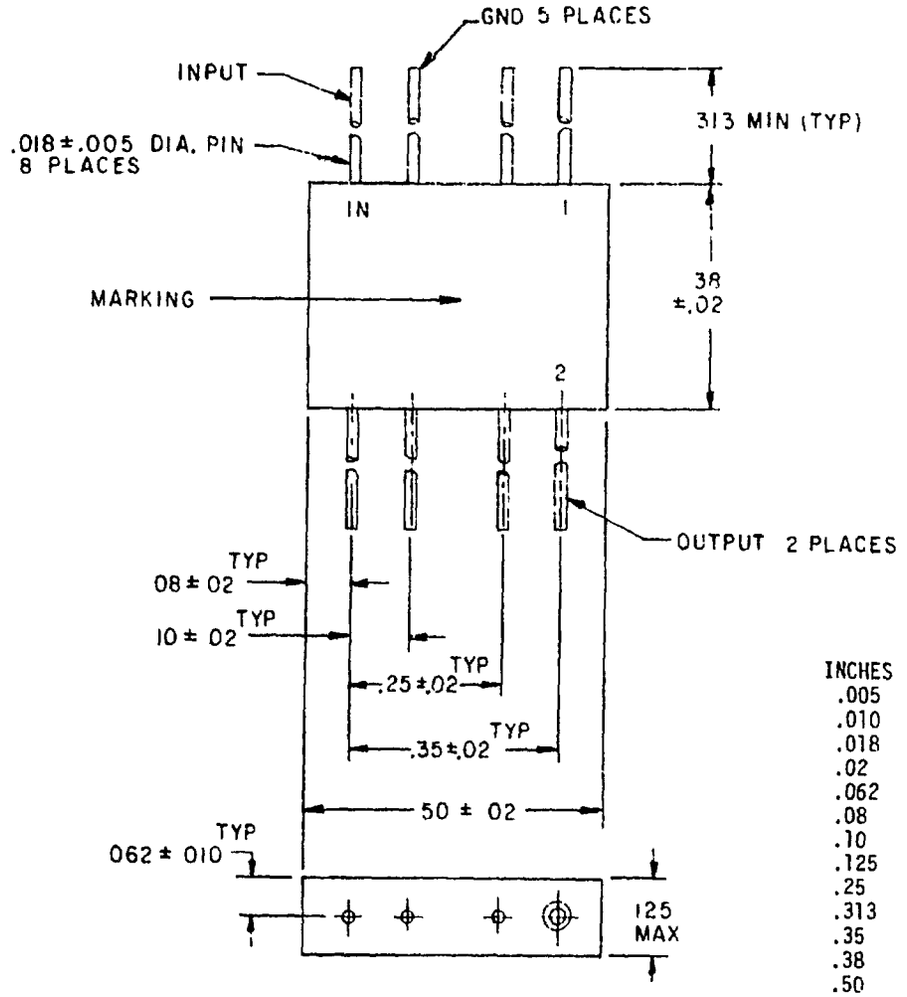


INCHES	MM
.005	.13
.010	.25
.018	.46
.02	.5
.062	1.57
.08	2.0
.10	2 5
.125	3.18
.25	6.4
.313	7.95
.35	8.9
.38	9.7
.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, 2-way, dash numbers 01, 02, and 03.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

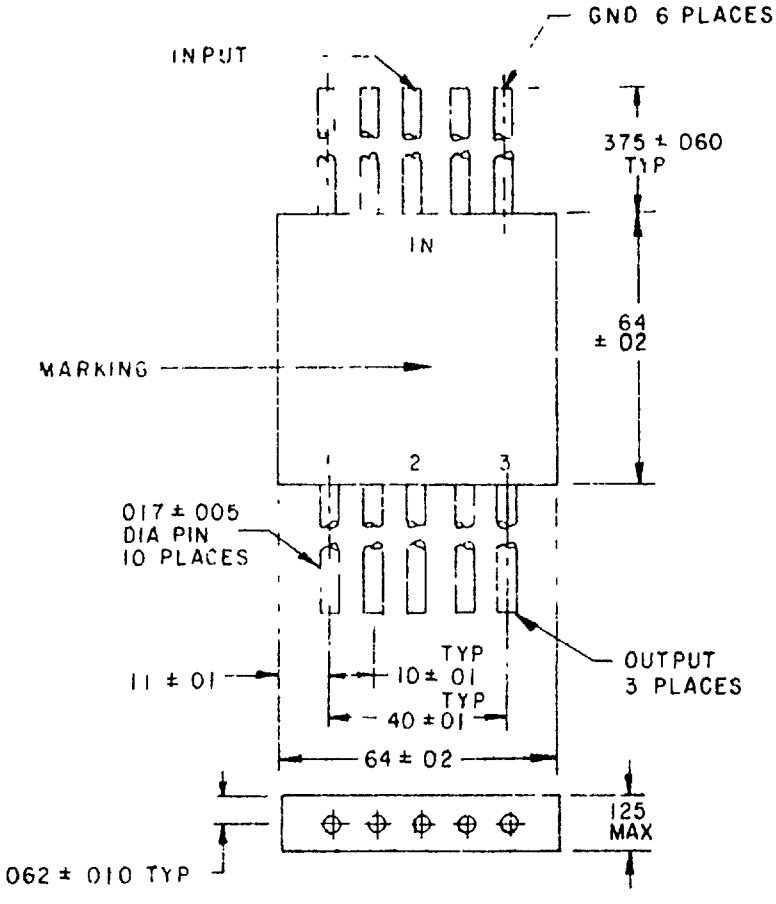


INCHES	MM
.005	.13
.01	.3
.010	.25
.017	.43
.020	.51
.02	.508
.060	1.52
.062	1.57
.10	2.5
.11	2.8
.125	3.18
.375	9.52
40	10.2
.640	16.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration, 3-way , dash number 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

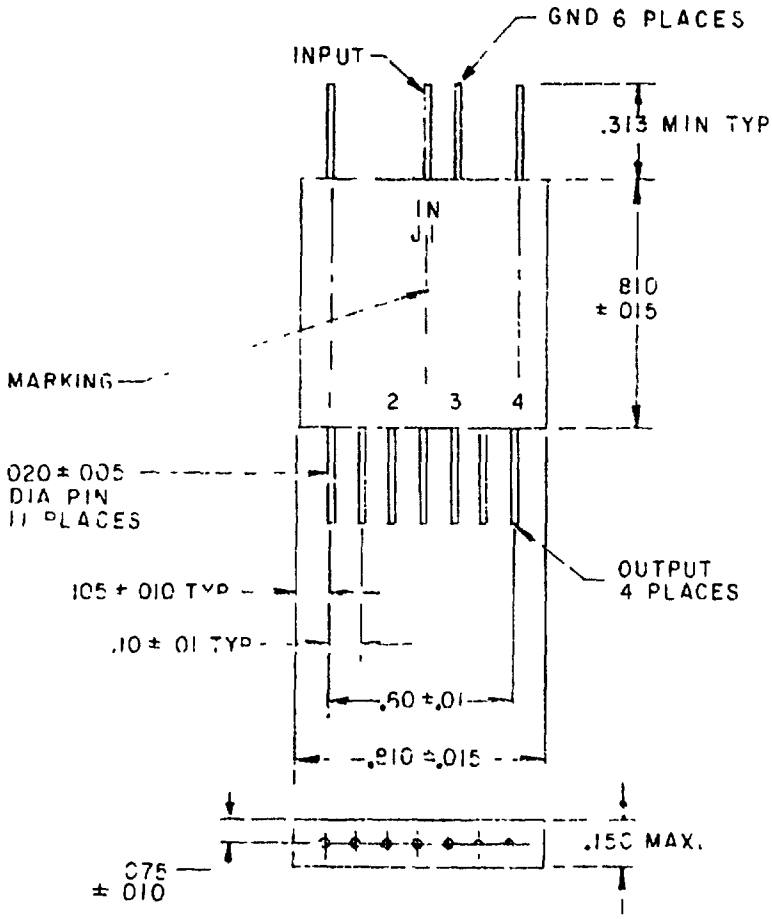

INCHES	MM
005	.13
.010	.25
015	.38
.020	.51
.075	1.90
.10	2.5
.105	2.67
.150	3.81
313	7.95
60	15.2
.810	20.57

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm

FIGURE 3 Dimensions and configuration, 4-way, dash number 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

TABLE I Electrical performance characteristics and physical requirements

M23971/14–	Impedance (ohms)	Frequency range (MHz)	Average coupling (dB)	VSWR max	Insertion loss max (dB)	Isolation min (dB)	Phase balance max (degree)	Amplitude balance (dB) max	Power level avg (W)	Power level pk (W)	Weight pounds (grams)	Ambient temperature Operating	Ambient temperature Storage	Figure
01	50	5-100	3 + 2 - 0	1.3:1	0.4	30	±1.0	±0.1	–	1.0	.006 (2.8)	20° to +71°C	40° to +85°C	1
02	50	10-25 / 25-500	3 + 6 - 0	1.3:1	0.6	25 / 30	±1.0	±0.1		1.0	.006 (2.8)	-55°C to +85°C	-65°C to +100°C	1
03	50	300-500	3 + 2 – 0	1.3:1	0.5	30	±2.0	±0.1	–	1.0	.006 (2.8)	-20°C to +71°C	-40°C to +85°C	1
04	50	3-32	4.8 + 3 – 0	1.2:1	0.6	30	±2.0	±0.2	–	0.5	.008 (3.5)	-20°C to +71°C	-40°C to +85°C	2
05	50	10-25	–	1.5:1	–	25	±2.0	±2.0	–	1.0	.006 (2.8)	-55° to +85°C	-55° to +85°C	3
		25-500	–	1.35:1	–									
		10-400	6 + 7.5 – 0	–	0.75									
		400-500	6 + 8.5 – 0	–	0.85									

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction See figures 1, 2, and 3

Case Hermetically sealed

Terminals. Solderable

Electrical characteristics See table I

Weight See table I

Ambient temperature See table I

Part number M23971/14 – (dash number from table I)

NOTE Power dividers covered by this specification sheet are substituted for the following manufacturer's part number This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	00724 12457	69-00316-002 PDG-2A-53/16101	
02	05869 21912 82577 12457 05375	723133-1 DS-109 909111 PDF-2A-225/17889 SH-209	
03	00724 12457	69-00316-001 PDF-2A-400/16101	
04	00724 12457	69-00313-001 PDF-3C-20/16101	
05	05869 21912	723134-1 DS-112	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army -
Navy -
Air Force -
DLA - ES

User activities:
Army -
Navy - OS, MC, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0900)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-P-25971/14

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.