INCH-POUND

MIL-DTL-23971/14A
21 April 2003
SUPERSEDING
MIL-P-23971/14
22 February 1980

DETAIL SPECIFICATION SHEET

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, FLAT PACK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-23971.

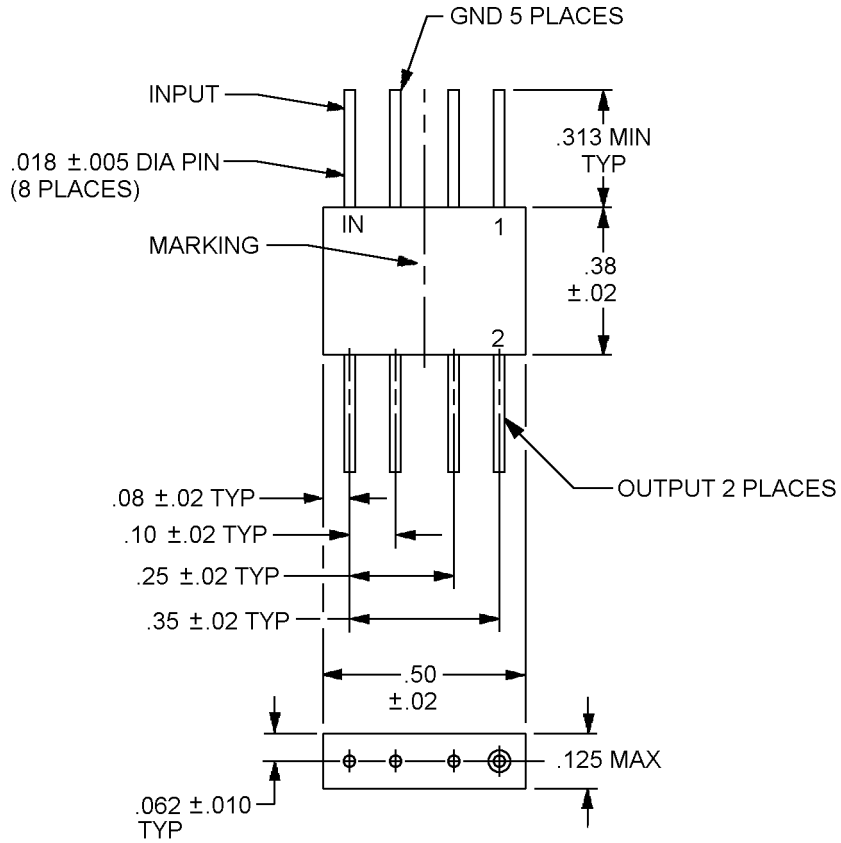

Inches	mm
.005	0.13
.010	0.25
.018	0.46
.02	0.5
.062	1.57
.08	2.0
.10	2.5
.125	3.18
.25	6.4
.313	7.95
.35	8.9
.38	9.7
.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, 2-way, dash numbers 01, 02, and 03.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

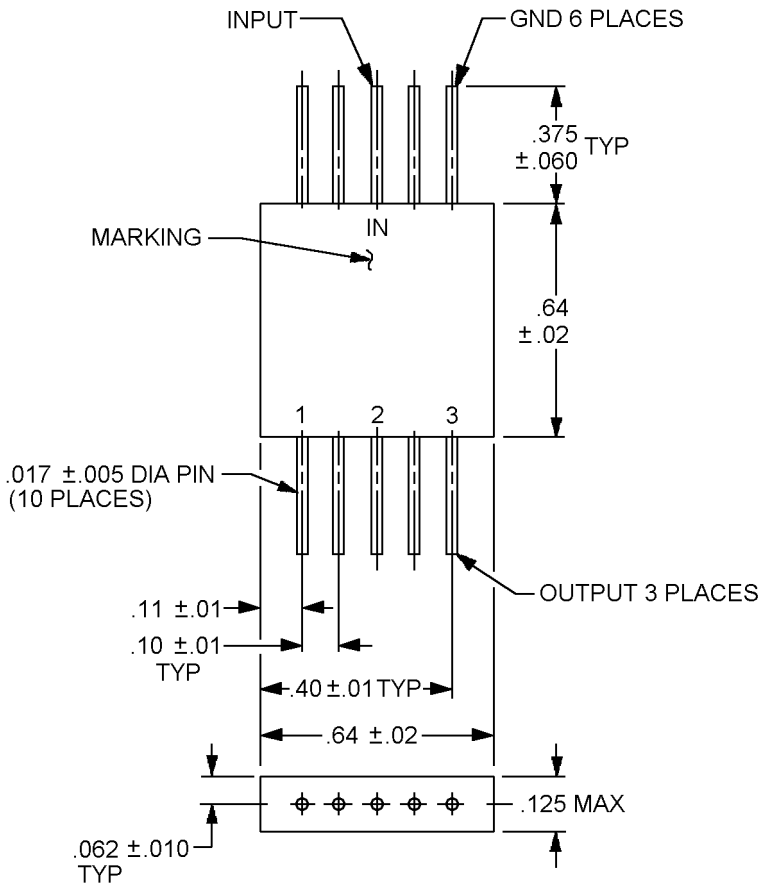

Inches	mm
.005	0.13
.010	0.25
.01	0.3
.017	0.43
.02	0.508
.020	0.51
.060	1.52
.062	1.57
.10	2.5
.11	2.8
.125	3.18
.375	9.52
.40	10.2
.640	16.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration, 3-way, dash number 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

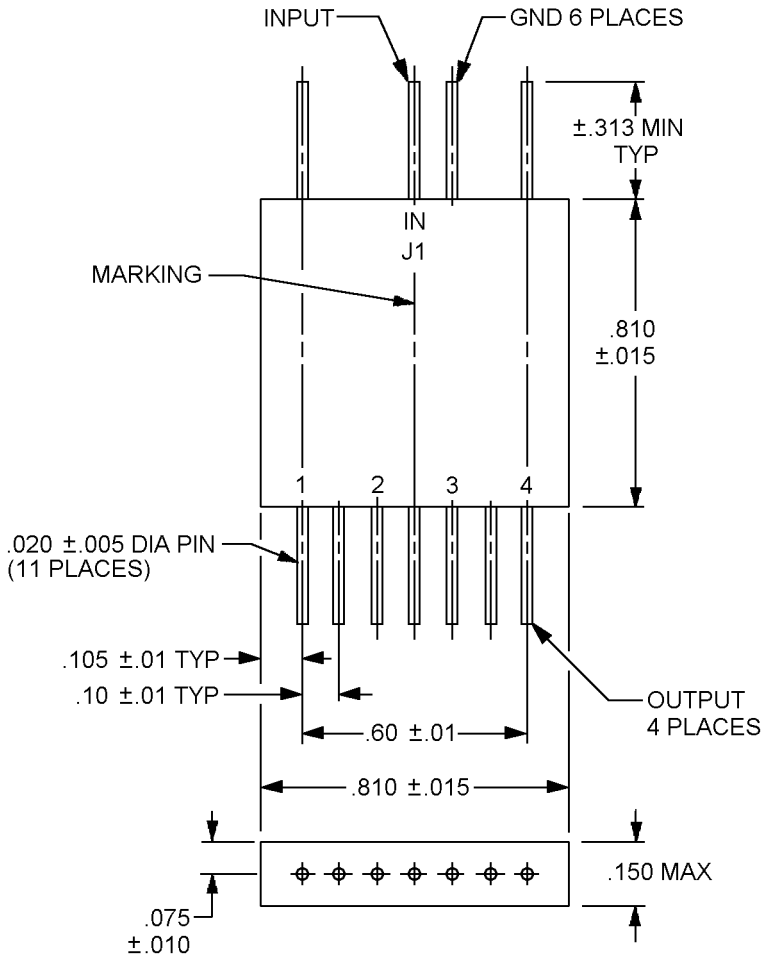

Inches	mm
.005	0.13
.010	0.25
.015	0.38
.020	0.51
.075	1.90
.10	2.5
.105	2.67
.150	3.81
.313	7.95
.60	15.2
.810	20.57

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration, 4-way, dash number 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

A TABLE I. Electrical performance characteristics and physical requirements.

M23971/14-	Impedance (ohms)	Frequency range (MHz)	Average coupling (dB)	VSWR max	Insertion loss max (dB)	Isolation min (dB)	Phase balance max (degree)	Amplitude balance max (dB)	Power level		Weight pounds (grams)	Ambient temperature		Figure
									avg (W)	pk (W)		Operating	Storage	
01	50	5-100	3.0 + 0.2 -0.0	1.3:1	0.4	30	±1.0	± 0.1	---	1.0	.006 (2.8)	-20°C to +71°C	-40°C to +85°C	1
02	50	10-25	3.0 + 0.6 -0.0	1.3:1	0.6	25	±1.0	± 0.1	---	1.0	.006 (2.8)	-55°C to +85°C	-65°C to +100°C	1
		25-500				30								
03	50	300-500	3.0 + 0.2 -0.0	1.3:1	0.5	30	±2.0	± 0.1	---	1.0	.006 (2.8)	-20°C to +71°C	-40°C to +85°C	1
04	50	3-32	4.8 + 0.3 -0.0	1.2:1	0.6	30	±2.0	± 0.2	---	0.5	.008 (3.5)	-20°C to +71°C	-40°C to +85°C	2
05	50	10-25	---	1.5:1	---	25	±2.0	±0. 2	---	1.0	.006 (2.8)	-55°C to +85°C	-55°C to +85°C	3
		25-500	---	1.35:1	---									
		10-400	6.0 + 0.75 -0.0	---	0.75									
		400-500	6.0 + 0.85 -0.0	---	0.85									

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1, 2, and 3.

Case: Hermetically sealed.

Terminals: Solderable.

Electrical characteristics: See table I.

Weight: See table I.

Ambient temperature: See table I.

Part or Identifying Number (PIN): M23971/14 - (dash number from table I).

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5985-1259-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.