INCH-POUND

MIL-DTL-23971/14B
23 April 2013
SUPERSEDING
MIL-DTL-23971/14A
21 April 2003


DETAIL SPECIFICATION SHEET

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, FLAT PACK

INACTIVE FOR NEW DESIGN
AFTER 1 APRIL 2008

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-23971.

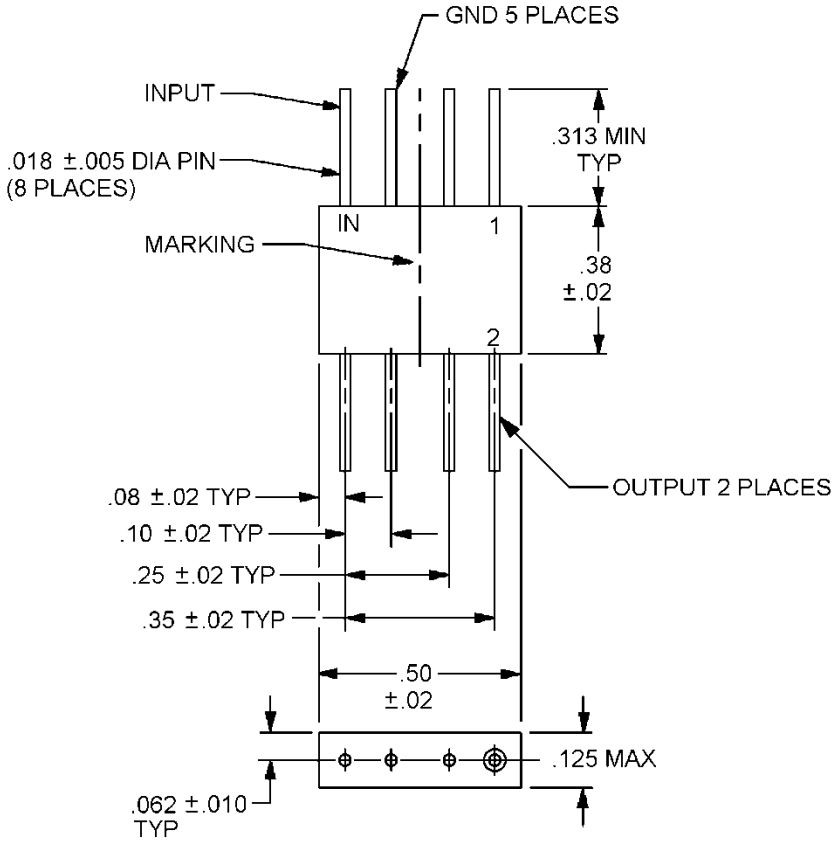


Inches	mm
.005	0.13
.010	0.25
.018	0.46
.02	0.5
.062	1.57
.08	2.0
.10	2.5
.125	3.18
.25	6.4
.313	7.95
.35	8.9
.38	9.7
.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, 2-way, dash numbers 01, 02, and 03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

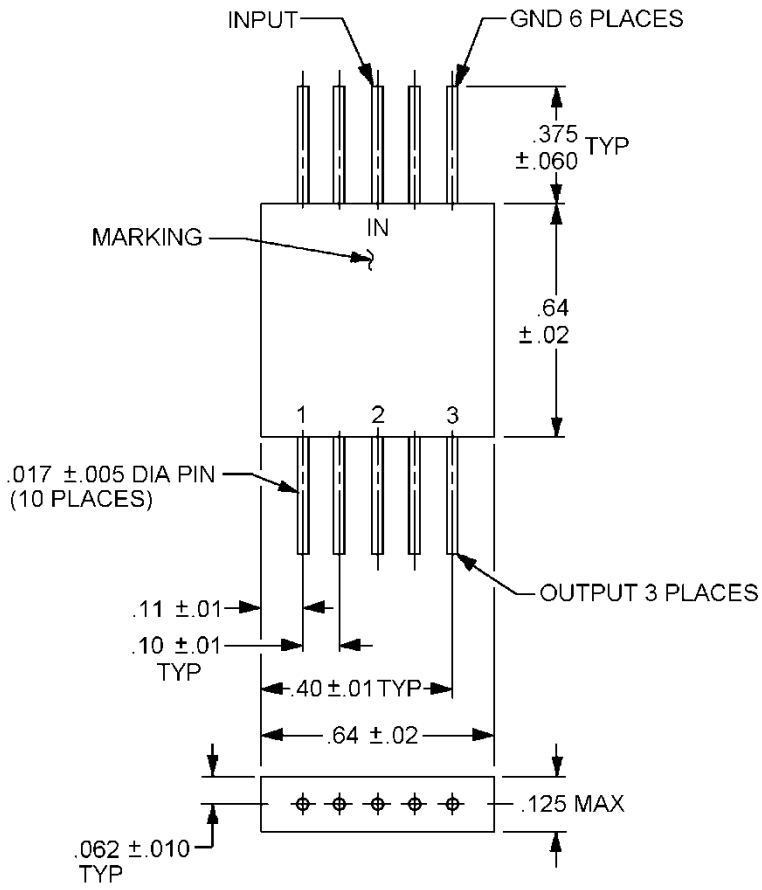


Inches	mm
.005	0.13
.010	0.25
.01	0.3
.017	0.43
.02	0.508
.020	0.51
.060	1.52
.062	1.57
.10	2.5
.11	2.8
.125	3.18
.375	9.52
.40	10.2
.640	16.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration, 3-way, dash number 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

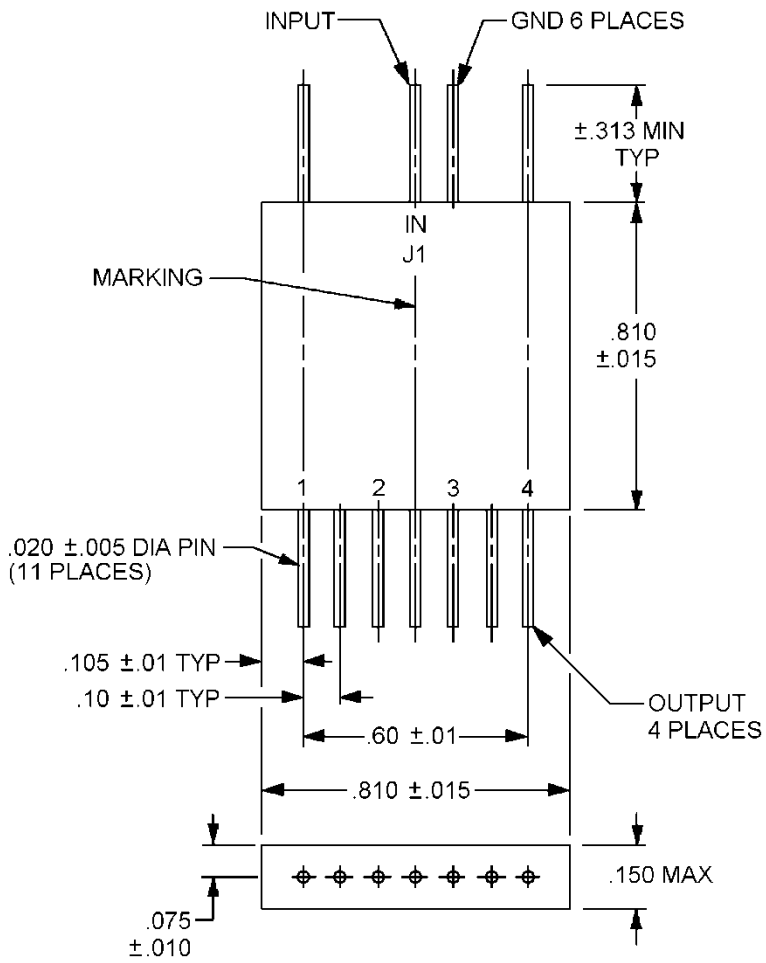

Inches	mm
.005	0.13
.010	0.25
.015	0.38
.020	0.51
.075	1.90
.10	2.5
.105	2.67
.150	3.81
.313	7.95
.60	15.2
.810	20.57

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration, 4-way, dash number 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics and physical requirements.

M23971/14-	Impedance (ohms)	Frequency range (MHz)	Average coupling (dB)	VSWR max	Insertion loss max (dB)	Isolation min (dB)	Phase balance max (degree)	Amplitude balance max (dB)	Power level		Weight pounds (grams)	Ambient temperature		Figure
									avg (W)	pk (W)		Operating	Storage	
01	50	5-100	3.0 + 0.2 -0.0	1.3:1	0.4	30	±1.0	± 0.1	---	1.0	.006 (2.8)	-20°C to +71°C	-40°C to +85°C	1
02	50	10-25	3.0 + 0.6 -0.0	1.3:1	0.6	25	±1.0	± 0.1	---	1.0	.006 (2.8)	-55°C to +85°C	-65°C to +100°C	1
		25-500				30								
03	50	300-500	3.0 + 0.2 -0.0	1.3:1	0.5	30	±2.0	± 0.1	---	1.0	.006 (2.8)	-20°C to +71°C	-40°C to +85°C	1
04	50	3-32	4.8 + 0.3 -0.0	1.2:1	0.6	30	±2.0	± 0.2	---	0.5	.008 (3.5)	-20°C to +71°C	-40°C to +85°C	2
05	50	10-25	---	1.5:1	---	25	±2.0	±0. 2	---	1.0	.006 (2.8)	-55°C to +85°C	-55°C to +85°C	3
		25-500	---	1.35:1	---									
		10-400	6.0 + 0.75 -0.0	---	0.75									
		400-500	6.0 + 0.85 -0.0	---	0.85									

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1, 2, and 3.

Case: Hermetically sealed.

Terminals: Solderable.

Electrical characteristics: See table I.

Weight: See table I.

Ambient temperature: See table I.

Part or Identifying Number (PIN): M23971/14 - (dash number from table I).

Referenced documents. This specification sheet only references MIL-DTL-23971.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5985-2013-019)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:36Z
Check the source to verify that this is the current version before use.