INCH-POUND


MIL-DTL-23971/17B
3 May 2012
SUPERSEDING
MIL-DTL-23971/17A
2 October 2006

DETAIL SPECIFICATION SHEET

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, TNC CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-23971.

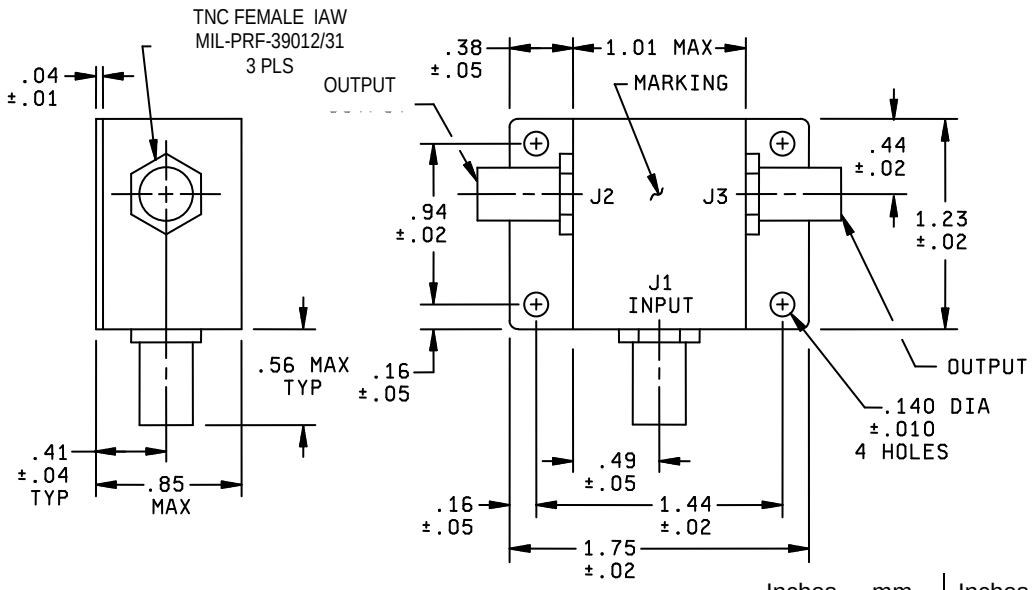


Inches	mm	Inches	mm
.01	0.3	.44	11.2
.02	0.5	.49	12.4
.04	1.0	.56	14.2
.05	1.3	.85	21.6
.14	3.6	.94	23.9
.16	4.1	1.01	25.7
.38	9.7	1.23	31.2
.41	10.4	1.44	36.6
		1.75	44.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration, 2-way, dash number 01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:38Z
Check the source to verify that this is the current version before use.

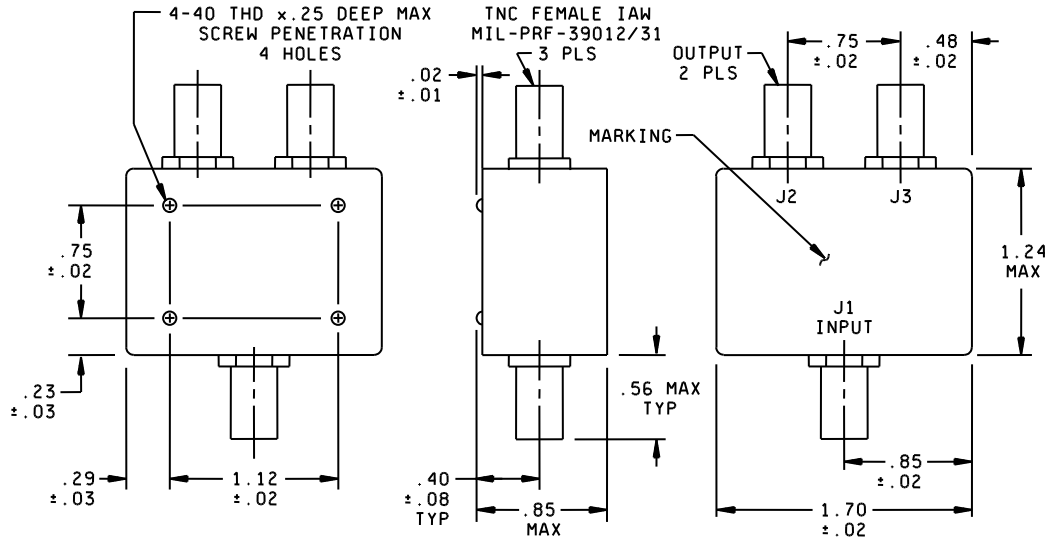


Inches	mm	Inches	mm
.01	0.3	.48	12.2
.02	0.5	.56	14.2
.03	0.8	.75	19.0
.08	2.0	.85	21.6
.23	5.8	1.12	28.4
.25	6.4	1.24	31.5
.29	7.4	1.70	43.2
.40	10.2		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dimensions and configuration, 2-way, dash number 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:38Z
Check the source to verify that this is the current version before use.

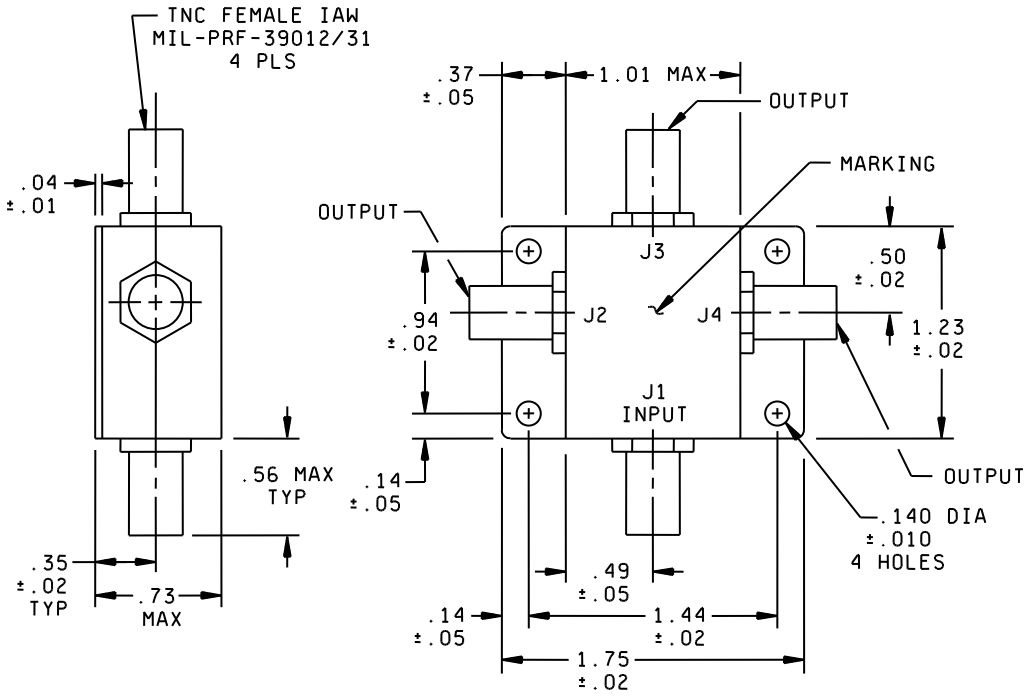

Inches	mm	Inches	mm
.01	0.3	.50	12.7
.02	0.5	.56	14.2
.04	1.0	.73	18.5
.05	1.3	.94	23.9
.14	3.6	1.01	25.7
.35	8.9	1.23	31.2
.37	9.4	1.44	36.6
.49	12.4	1.75	44.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 3. Dimensions and configuration, 3-way, dash number 03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:38Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics and physical requirements.

M23971/17-	Impedance (ohms)	Frequency range MHz	Average coupling (dB)	VSWR max	Insertion loss max (dB)	Isolation min (dB)	Phase balance max (degree)	Amplitude balance max (dB)	Power level		Weight pounds (grams)	Ambient temperature		Figure
									avg (W)	pk (W)		Operating	Storage	
01	50	.05 - 20	3.0 + 0.2 - 0.0	1.3:1	0.5	30	± 1.0	± 0.2	---	2	.14 (64)	-55°C to +85°C	-65°C to +100°C	1
02	50	1 - 100	3.0 + 0.2 - 0.0	1.3:1	0.5	30	± 1.0	± 0.2	---	5	.16 (73)	0°C to +40°C	-40°C to +100°C	2
03	50	200 - 400	4.8 + 0.3 - 0.0	1.3:1	0.75	25	± 2.0	± 0.2	---	5	.15 (70)	-55°C to +85°C	-65°C to +100°C	3

TABLE II. Environmental tests, in accordance with MIL-DTL-23971, except:

M23971/17-	Thermal shock	Vibration high frequency	Shock
01, 03	Test condition A	Test condition D	Test condition A

AMSC N/A

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1 through 3.

Case: Enclosed type.

Electrical characteristics: See table I.

Weight: See table I.

Ambient temperature: See table I.

Environmental requirements: See table II.

Part or Identifying Number (PIN): M23971/17- (dash number from table I).

Referenced documents. In addition to MIL-DTL-23971, this specification sheet references the following documents:
MIL-PRF-39012/31

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Navy - AS, MC, OS

Preparing activity:
DLA - CC

(Project 5985-2012-013)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:38Z
Check the source to verify that this is the current version before use.