INCH-POUND
MIL-PRF-19500/260F
10 December 1999
SUPERSEDING
MIL-PRF-19500/260E
6 August 1999

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER,
TYPES 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A AND AR VERSIONS
JAN, JANTX, JANTXV, JANS, JANHC AND JANKC
1N1124A, 1N1126A, 1N1128A, 1N3649, 1N3650, 1N1124RA ,
1N1126RA, 1N1128RA , 1N3649R, AND 1N3650R JAN ONLY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon semiconductor power rectifier diodes. Four levels of product assurance are provided for each encapsulated 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A device type as specified in MIL-PRF-19500, and two levels of product assurance for each unencapsulated device type. One level of product assurance is provided for each device type as specified in MIL-PRF-19500, for the 1N1124A, 1N1126A, 1N1128A, 1N3649, 1N3650. For normal and reverse (A, R, RA and AR suffix) type devices see 3.3.1.

1.2 Physical dimensions. See figure 1 (DO-203AA, formerly DO–4) and figure 2 (JANHC and JANKC).

1.3 Maximum ratings.

| Type | $V_{RWM}$ | $I_O$ 1/ $T_C$ = 150°C | $I_{f(surge)}$ $T_C$ = 150°C T = 1/120 s | $t_{rr}$ | Barometric pressure (reduced) | $T_J$ and $T_{STG}$ |
|---|---|---|---|---|---|---|
| | V dc | A dc | A pk | µs | mmHg | °C |
| 1N1202A | 200 | 12 1/ | 240 | 10 | N/A | -65 to +200 |
| 1N1204A | 400 | 12 1/ | 240 | 10 | 8 | -65 to +200 |
| 1N1206A | 600 | 12 1/ | 240 | 10 | 16 | -65 to +200 |
| 1N3671A | 800 | 12 1/ | 240 | 10 | 30 | -65 to +200 |
| 1N3673A | 1000 | 12 1/ | 240 | 10 | 54 | -65 to +200 |
| 1N1124A 2/ | 200 | 3.3 3/ | 25 | | 8 | -65 to +175 |
| 1N1126A 2/ | 400 | 3.3 3/ | 25 | | 8 | -65 to +175 |
| 1N1128A 2/ | 600 | 3.3 3/ | 25 | | 16 | -65 to +175 |
| 1N3649 2/ | 800 | 3.3 3/ | 25 | | 30 | -65 to +175 |
| 1N3650 2/ | 1,000 | 3.3 3/ | 25 | | 54 | -65 to +175 |

1/ Derate linearly 2 percent of $I_O$ per C° for $T_C$ = 150°C to $T_C$ = 200°C.
2/ The 1N1124A, 1N1126A, 1N1128A, 1N3649, 1N3650 and reverse versions have been moved from MIL-S-19500/104, which has been canceled, are now inactive for new design.
3/ Derate linearly 23 mA dc/°C for $T_C$ = 50°C to $T_C$ = 150°C.

1.4 Primary electrical characteristics. $R_{\theta JC}$ = 2.0 °C/W maximum.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in section 3 and 4 of this specification, whether or not they are listed.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

FEDERAL

FED-STD H28 -- Screw Thread Standards for Federal Services

DEPARTMENT OF DEFENSE

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

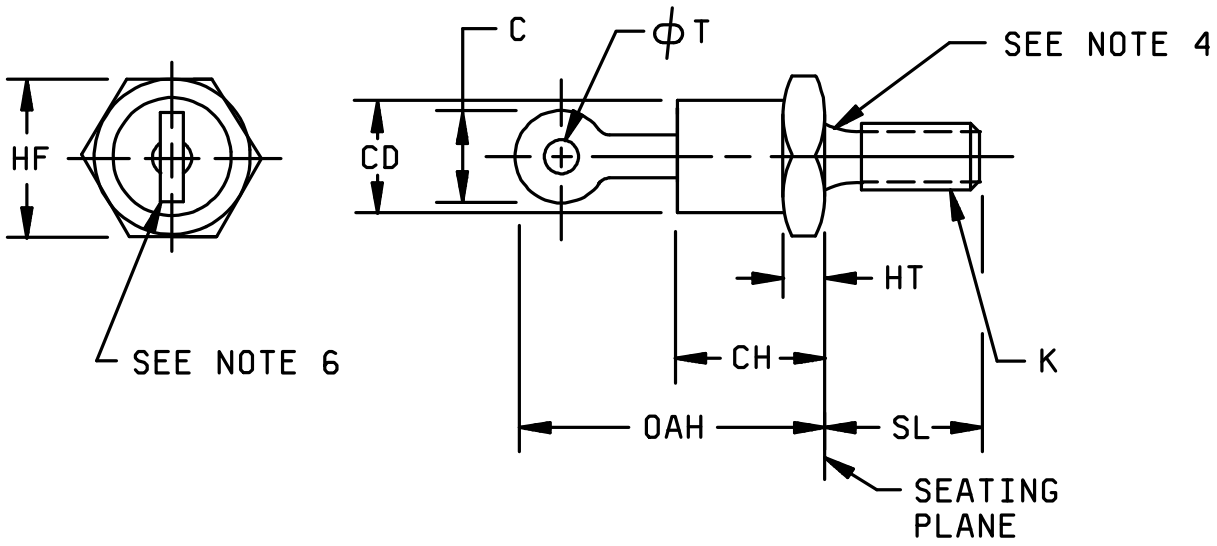
3.3 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1 (DO-203AA, formerly DO–4) and figure 2 (JANHC and JANKC).

3.3.1 Normal and reverse (A, R, RA and AR suffix) types. Reverse and normal types are identical except: The normal types have the cathode connected to the stud and the reverse types have the anode connected to the stud.

3.3.2 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750 and herein. Where a choice of lead finish is desired, it shall be specified in the contract or purchase order (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.



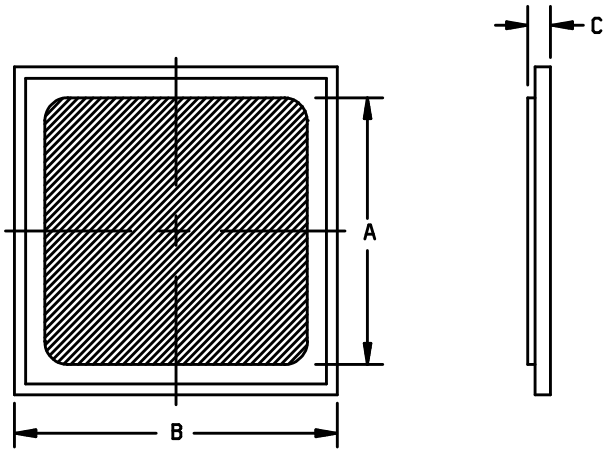

| Ltr | Dimensions | | | | Notes |
|---|---|---|---|---|---|
| | Inches | | Millimeters | | |
| | Min | Max | Min | Max | |
| CH | | 0.405 | | 10.29 | |
| CD | | 0.424 | | 10.77 | |
| HF | 0.424 | 0.437 | 10.77 | 11.10 | |
| HT | 0.075 | 0.175 | 1.90 | 4.44 | |
| OAH | | 0.800 | | 20.32 | |
| C | | 0.250 | | 6.35 | 9 |
| ϕT | 0.060 | | 1.52 | | |
| SL | 0.422 | 0.453 | 10.72 | 11.51 | |
| K | | | | | 3,5,7 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Units must not be damaged by torque of 15 inch-pounds applied to 10-32NF-2B nut assembled on thread.
4. Diameter of unthreaded portion 0.189 inch (4.80 mm) max and 0.163 inch (4.14 mm) min.
5. Complete threads to extend to within 2.5 threads of seating plane.
6. Angular orientation of this terminal is undefined.
7. Max pitch diameter of plated threads shall be basic pitch diameter 0.169 inch (4.31 mm) reference FED-STD-H28 (Screw Thread Standards for Federal Services.)
8. The A.S.A. thread reference is 10-32UNF2A.
9. Terminal shape is unrestricted.

FIGURE 1. Physical dimensions.(DO-203AA, formerly DO-4). 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A and AR versions, and 1N1124A, 1N1126A, 1N1128A, and RA versions 1N3649, 1N3650, and R versions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.




A Version

| Ltr | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | 0.116 | 0.122 | 2.95 | 3.10 |
| B | 0.147 | 0.153 | 3.73 | 3.89 |
| C | 0.009 | 0.012 | 0.229 | 0.305 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The physical characteristics of the die are: Metallization {front (anode), consists of: Ti thickness = 1,200 Å minimum, Ni thickness = 2,000 Å minimum, Ag thickness = 4,000 Å minimum. Metallization {back, (cathode)} consists of: Ti thickness = 1,200 Å minimum, NI thickness = 2,000 Å minimum, Ag thickness = 4,000 Å minimum.

FIGURE 2. Physical dimensions JANHC and JANKC. 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.4.1 Polarity. The polarity shall be indicated by a graphic symbol with the arrow pointing toward the negative end for forward bias. The reversed units shall also be marked with an R, AR or RA suffix in the part number.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturer's list before contract award (see 4.2 and 6.4 ).

4.VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.1.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-19500 and herein, except for accumulation period shall be 3 months in lieu of 6 weeks.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and herein.

4.2.1 JANHC and JANKC devices. Qualification for JANHC and JANKC devices shall be in accordance with MIL-PRF-19500.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

4.3 Screening. Screening shall be in accordance with MIL-PRF-19500 (table IV), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (see table IV of MIL-PRF-19500) | Measurement | |
|---|---|---|
| | JANS level | JANTX and JANTXV levels |
| 1/ | Surge (see 4.3.1)<br>Thermal response (see 4.3.2) | Surge (see 4.3.1)<br>Thermal response (see 4.3.2) |
| 4 | Not applicable | Not applicable |
| 9 | $V_{F2}$ and $I_{R1}$ 2/ | $V_{F2}$ and $I_{R1}$ 2/ |
| 10 | MIL-STD-750, method 1038, test condition A, t = 96 hours | MIL-STD-750, method 1038, test condition A, t = 48 hours |
| 11 | $V_{F2}$ and $I_{R1}$; Subgroup 2 of table I herein, $\Delta V_{F2} = \pm$ 0.1 V(pk) from initial value; $\Delta I_{R1}$ = 5 µA dc or 100 percent from the initial value, whichever is greater. | Subgroup 2 of table I herein, $\Delta V_{F2} = \pm$0.1 V(pk) from initial value; $\Delta I_{R1} = \pm$ 5.0 µA dc or 100 percent from the initial value, whichever is greater. 3/ |
| 12 | Burn-in, see 4.3.3 and 4.5.1. MIL-STD-750, method 1038, test condition B. | Not applicable |
| 13 | Subgroups 2 and 3 of table I herein; $\Delta V_{F2} = \pm$ 0.1 V (PK); $\Delta I_{R1}$ = 5 µA dc or 100 percent from the initial value, whichever is greater. | Not applicable |

1/ Surge shall precede thermal response. These tests shall be performed anytime after screen 3 and before screen 9.
2/ $I_{R1}$ measurement shall not be indicative of an open condition.
3/ PDA of screen 13 shall apply to screen 11 for JANTX and JANTXV.

4.3.1 Surge current. Surge current, see MIL-STD-750, method 4066. $I_O$ = 0; $V_{RM}(w)$ = 0; $I_{FSM}$ = 275A; six surges; $T_A$ = 25°C, $t_p$ = 8.3 ms, one surge per minute maximum.

4.3.2 Thermal response. The thermal response measurements shall be performed in accordance with method 3101 of MIL-STD-750. The thermal response conditions and maximum thermal response limit shall be derived by each vendor. The chosen thermal response measurement and conditions for each device in the qualification lot shall be submitted in the qualification report and a thermal response curve shall be plotted. The chosen thermal response values shall be considered final after the manufacturer has had the opportunity to test five consecutive lots. Heating current ($I_H$) ≥ rated $I_O$; $t_H$ = 150 to 400 ms; $t_{MD}$ = 50 to 300 µs; 50 mA ≤ $I_M$ ≤` 250 mA.

4.3.3 Power burn-in. Power burn-in conditions are as follows: MIL-STD-750, method 1038, test condition B. $T_C$ = 150°C, f = 60 Hz, $I_O$ = 12 A dc (see 4.5.1); $V_R$ = rated $V_{RWM}$ (pk) (see 1.3).

4.3.4 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with MIL-PRF-19500. As a minimum, die shall be 100-percent probed to ensure compliance with $I_{R1}$ of group A, subgroup 2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIa (JANS) and table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraphs 4.4.2.1 and 4.4.2.2 herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B3 | 4066 | $T_C$ = 150°C; $V_R$ = Rated $V_R$ (see 1.3), $i_f$ (surge) = 240 A; $I_O$ = 12 A dc; six 1/120 s surges. 1 surge per minute maximum. $t_p$ = 8.3 ms. |
| B4 | 1037 | 0.25 Rated $I_O \leq I_O$ applied $\leq$ Rated $I_O$ (see 4.5.2) 2,000 cycles. |
| B5 | 1027 | $I_F$ = 4 A dc; $V_R$ = rated $V_R$ (see 1.3), $T_A$ = 125°C; or adjusted as required by the chosen $T_A$ to give an average lot $T_J$ = 275°C (see 4.5.1), f = 60 Hz. |
| B6 | 3101 | $R_{\theta JC}$ = 2.0°C/W maximum; $I_M$ = 50 – 250 mA; $I_H \geq$ rated $I_O$; $t_H$ = 150 to 400 ms; $t_{MD}$ = 50 to 300 µs. |

4.4.2.2 Group B inspection, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B2 | 4066 | $T_C$ = 150°C; $V_R$ = Rated $V_R$ (see 1.3), $i_f$ (surge) = 240 A; $I_O$ = 12 A dc; six 1/120 s surges. 1 surge per minute maximum. $t_p$ = 8.3 ms. |
| B3 | 1037 | 0.25 Rated $I_O \leq I_O$ applied $\leq$ Rated $I_O$ (see 4.5.2) 2,000 cycles. |
| B3 | 1038 or 1049 | Condition A; 340 hrs. |
| B5 | | Not required. |

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500 and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.3.1 Group C inspection, table VII of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 1056 | Test condition B. |
| C2 | 2036 | Test condition A, Weight = 10 pounds, t = 15 s. |
| C2 | 2036 | Test condition F, method B, weight = 5 pounds, t = 15 s. |
| C2 | 2036 | Test condition D1, seal torque = 10 ounce-inches, t = 15 s. |
| C2 | 2036 | Test condition D2, stud torque = 15 pound-inches, t = 15 s. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

| | | |
|---|---|---|
| C5 | 3101 | $R_{\theta JC}$ = 2.0°C/W maximum; $I_M$ = 50 – 250 mA; $I_H \geq$ rated $I_O$; $t_H$ = 150 to 400 ms; $t_{MD}$ = 50 to 300 µs. |
| C6 | 1037 | 0.25 Rated $I_O \leq I_O$ applied $\leq$ Rated $I_O$ (see 4.5.2) 6,000 cycles. |

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IX of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.4.1 Group E inspection, table IX of MIL-PRF-19500.

| Subgroup | Method | Condition | Sampling plan |
|---|---|---|---|
| E1 | 1056 | 0° to 100°C, 100 cycles. | 22 devices, c = 0 |
| E2 | 1038<br>or<br>1049 | Condition A; 1,000 hrs. | 22 devices, c = 0 |
| E3 | 2101 | Photos of cross sections shall be submitted In the qualification report. Vendors shall retain duplicate photos. | 3 devices, c = 0 |
| E4 | 3101 | $R_{?JC}$ = 2.0°C/W maximum; $I_M$ = 50 - 250 mA; $I_H \geq$ rated $I_O$; $t_H$ = 150 to 400 ms; $t_{MD}$ = 50 to 300 µs | 22 devices, c = 0 |
| E5 | 1001 | Hg = rated Hg (see 1.3), t = 60 s, While the test is being performed, $I_R$ shall be monitored and shall not exceed group A limits. | 22 devices, c = 0 |

| | Voltage during test |
|---|---|
| 1N1202A | N/A |
| 1N1204A | 400 V dc |
| 1N1206A | 600 V dc |
| 1N3671A | 800 V dc |
| 1N3673A | 1,000 V dc |

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Burn-in and steady-state operation life tests. These tests shall be conducted with a half-sine waveform of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectifier current. The forward conduction angle of the rectified current not be greater than 180 degrees nor less than 150 degrees.

4.5.2 DC intermittent operation life. A cycle shall consist of an "on" period, when power is applied suddenly, not gradually, to the device for the time necessary to achieve a delta case temperature of 85°C +15°C -5°C followed by an "off" period, when the power is suddenly removed, for cooling. Auxiliary (forced) cooling is permitted during the off period only. 30 s $\leq t_{Heating} \leq$ 60 s, $P = V_F \times I_F$ or $P = V_{FPK} \times I_{av}$ if using sine wave current. DC full wave current (or equivalent half sine wave current) shall be used for the power required during the on period. The test power, or current, shall be at least the free air rating. Within the time interval of 50 cycles before to 500 cycles after the termination of the test, the sample units shall be removed from the specified test conditions and allowed to reach room ambient conditions. Specified end-point measurements for qualification and quality conformance inspection shall be completed within 96 hours after removal of sample units from the specified test conditions. Additional readings may be taken at the discretion of the manufacturer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1<br>Visual and mechanical inspection | 2071 | | | | | |
| Subgroup 2<br>Forward voltage 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A | 4011 | $I_F$ = 38 A (pk) pulse; pulse width ≤8.5 ms, duty cycle ≤ 2 percent pulse | $V_{F2}$ | | 1.35 | V (pk) |
| Forward voltage 1N1124A, 1N1126A, 1N1128A, 1N3649, 1N3650 | 4011 | $I_F$ = 10 Adc (pulse): $t_p \leq 8.5$ msec; | $V_F$ | | 2.2 | V (pk) |
| Reverse current | 4016 | DC method, $V_R$ = Rated $V_{R\,(dc)}$ (see 1.3) | $I_{R1}$ | | 5 | µA dc |
| Subgroup 3<br>High temperature operation: | | $T_C$ = 150°C | | | | |
| Reverse current 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A | 4016 | DC method, $V_R$ = Rated $V_{R(pk)}$ (see 1.3) | $I_{R2}$ | | 1 | mA dc |
| 1N1124A, 1N1126A, 1N1128A, 1N3649, 1N3650 | 4016 | $T_C$ = 150°C +5°C, -0°C | $I_{R2}$ | | 200 | µA dc |
| Low temperature operation<br>Reverse current 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A | 4026 | $T_C$ = -65°C<br>DC method, $V_R$ = Rated $V_{R\,(dc)}$ (see 1.3) | $I_{R3}$ | | 1 | mA dc |
| Subgroups 4 and 5<br>Not applicable | | | | | | |
| Subgroup 6 2/<br>Forward voltage | 4011 | $I_F = I_{FSM}$ , $t_P$ = 800 µs | $V_{F1}$ | | 2.5 | V dc |
| Forward voltage | 4011 | $I_F = I_{FSM}$ , $t_P \leq 8.3$ ms | $V_{F1}$ | | 2.3 | V dc |

See footnotes on next page.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

1/ For sampling plan, see MIL-PRF-19500.
2/ $V_{F1}$ shall be performed with either $t_p$ = 800 µs or $t_p$ = 8.3 ms. This subgroup does not apply to 1N1124A, RA; 1N1126A, RA; 1N1128A, RA; 1N3649, R; & 1N3650, R.

TABLE II. Groups B, C and E delta measurements. 2/ 3/ 4/ 5/

| Step | Inspection | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|
| | | Method | Conditions | | Min | Max | |
| 1. | Thermal response | 3101 | See 4.3.2: $R_{\theta JC}$ = 2.0°C/W maximum; $I_M$ = 50 to 250 mA; $t_H$ = 150 to 400 ms; $t_{MD}$ = 50 to 300 µs | $\Delta V_F$ | | | mV dc |
| 2. | Forward voltage | 4011 | $I_F$ =50 mA dc | $\Delta V_{F3}$ | ±50 mV dc maximum change from previous to post intermittent life and thermal shock measurement tests (JANS only). | | |
| 3. | Reverse current | 4016 | DC method, $V_R$ = Rated $V_R$(dc) (see 1.3) | $\Delta I_{R1}$ 1/ | 100 percent or 5 µA, (whichever is greater) change from initial Group A reading. | | |

1/ Devices which exceed the group A limits for this test shall be rejected.

2/ The delta electrical measurements for table VIa (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table II herein, steps 1 and 2.
b. Subgroup 4, see table II herein, steps 1 and 2.
c. Subgroup 5, see table II herein, step 3.

3/ The delta electrical measurements for table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table II herein, step 1.

4/ The delta electrical measurements for table VII of MIL-PRF-19500 are as follows:

a. Subgroup 2 see table II herein, step 1 (JAN, JANTX and JANTXV), steps 1 and 2 (JANS).
b. Subgroup 6, see table II herein, steps 1 and 2 (JANS), and step 1 (JAN, JANTX and JANTXV).

5/ The delta electrical measurements for table IX of MIL-PRF-19500 are as follows:

a. Subgroup 1 see table II herein, step 1.
b. Subgroup 2, see table II herein, step 3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements should be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Issue of DODISS to be cited in the solicitation (see 2.1.1).

b. The lead finish as specified (see 3.3.2).

c. Type designation and quality assurance level.

d. Packaging requirements (see 5.1).

e. For die acquisition, the JANHC or JANKC letter version must be specified (see figure 2).

6.3 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example, JANHCA1N1202A) will be identified on the QML.

| JANHC and JANKC ordering information | |
|---|---|
| | Manufacturer |
| PIN | 59377 |
| 1N1202A | JANHCA1N1202A, JANKCA1N1202A |
| 1N1204A | JANHCA1N1204A, JANKCA1N1204A |
| 1N1206A | JANHCA1N1206A, JANKCA1N1206A |
| 1N3671A | JANHCA1N3671A, JANKCA1N3671A |
| 1N3673A | JANHCA1N3673A, JANKCA1N3673A |

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturer's List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA – NA
DLA - CC

Review activities:
Army - AR, MI
Navy – AS, CG, MC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5961-2246)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

**STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL**

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| **I RECOMMEND A CHANGE:** | 1. DOCUMENT NUMBER<br>MIL-PRF-19500/260F | 2. DOCUMENT DATE<br>10 December 1999 |
|---|---|---|

3. **DOCUMENT TITLE** SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER, TYPES 1N1202A, 1N1204A, 1N1206A, 1N3671A, 1N3673A AND AR JAN, JANTX, JANTXV, JANS. JANHC AND JANKC; 1N1124A, 1N1126A, 1N1128A, 1N3649, 1N3650, 1N1124RA, 1N1126RA, 1N1128RA, 1N3649R, AND 1N3650R JAN ONLY

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>COMMERCIAL<br>DSN<br>FAX<br>EMAIL | 7. DATE SUBMITTED |

8. PREPARING ACTIVITY

| a. Point of Contact<br>Alan Barone | b. TELEPHONE<br>Commercial DSN FAX EMAIL<br>614-692-0510 850-0510 614-692-6939 alan_barone@dscc.dla.mil |
|---|---|
| c. ADDRESS<br>Defense Supply Center Columbus,<br>ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43213-1999 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Standardization Program Office (DLSC-LM)<br>8725 John J. Kingman, Suite 2533, Fort Belvoir, VA 22060-6221<br>Telephone (703) 767-6888 DSN 427-6888 |

**DD Form 1426, Feb 1999 (EG)** Previous editions are obsolete WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.