The documentation and process conversion measures necessary to comply with this document shall be completed by 24 October 2021.

INCH-POUND

MIL-PRF-19500/262J
w/AMENDMENT 1
24 June 2021
SUPERSEDING
MIL-PRF-19500/262J
20 June 2016

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, NPN, SILICON, HIGH-POWER
ENCAPSULATED (CASE AND STUD MOUNT PACKAGES), TYPES 2N1722 AND 2N1724,
QUALITY LEVELS JAN AND JANTX

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN, silicon, power transistors for use in high-speed power-switching applications. Two levels of product assurance are provided (JAN and JANTX) for each device type as specified in MIL-PRF-19500.

1.2 Package outlines. The device package outlines are a case mount TO-53 in accordance with figure 1 for types 2N1722 or a stud mount TO-61 in accordance with figure 2 for types 2N1724.

1.3 Maximum ratings. Unless otherwise specified, T_A = +25 °C.

Types	P_T (1) T_A = +25 °C	P_T (2) T_C = +100 °C	$R_{\theta JC}$	V_{CBO}	V_{CEO}	V_{EBO}	I_C	T_{stg} and T_J
	W	W	°C/W	V dc	V dc	V dc	A dc	°C
2N1722	3	50	1.5	175	80	10	5	-65 to +200
2N1724	3	50	1.5	175	80	10	5	

(1) Derate linearly at 20 mW/°C for $T_A \geq$ +25 °C $\leq$ +175 °C.
(2) Derate linearly at 666 mW/°C for $T_C >$ +100 °C $\leq$ +175 °C.

1.4 Primary electrical characteristics. Unless otherwise specified, at T_C = +25 °C.

Limits	h_{FE1} (1) V_{CE} = 15 V I_C = 2 A	$\lvert h_{fe} \rvert$ V_{CE} = 15 V I_C = 500 mA dc f = 10 MHz 2N1722, 2N1724	$V_{BE(sat)1}$ (1) I_C = 2 A dc I_B = 200 mA dc	$V_{CE(sat)1}$ (1) I_C = 2 A dc I_B = 200 mA dc	C_{obo} V_{CB} =15 V dc I_E = 0 f = 100 kHz $\leq$ f $\leq$ 1 MHz
			V dc	V dc	pF
Min	30	1			
Max	120	8	1.2	0.6	550

(1) Pulsed (see 4.5.1).

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level. The quality level designators for encapsulated devices that are applicable for this specification sheet is the base quality level "JAN", and "TX".

1.5.2 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".

1.5.2.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet are as follows: "1722", and "1724".

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

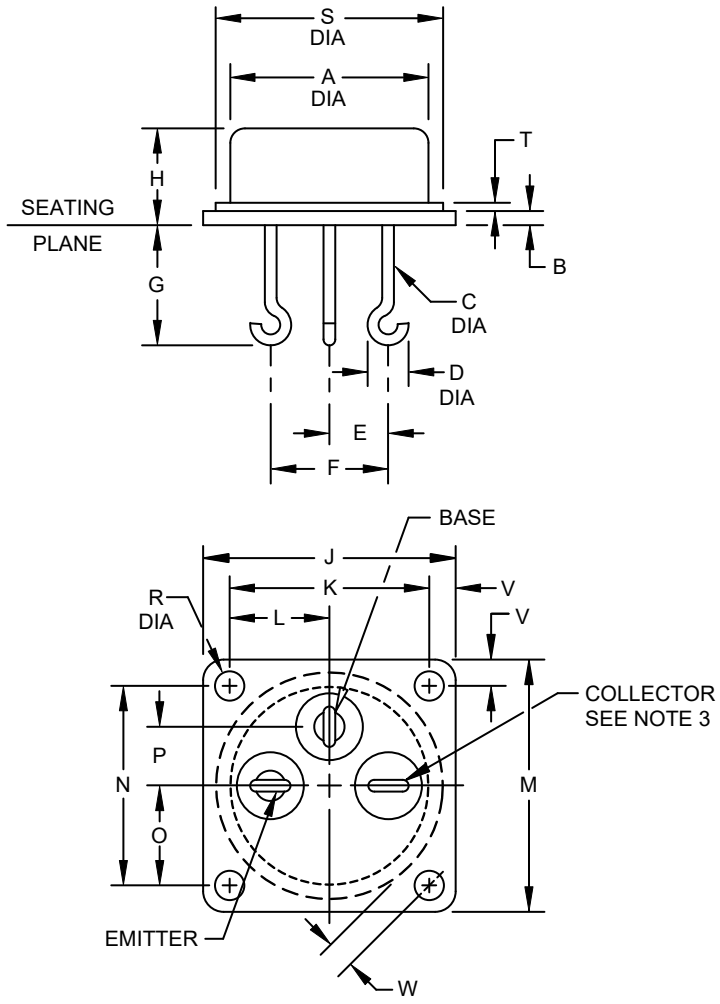


Letter	Dimension				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.670	.680	17.02	17.27	
B	.040	.055	1.02	1.40	
C	.035	.045	0.89	1.14	4
D	.130	.150	3.30	3.81	4
E	.190	.210	4.83	5.33	
F	.385	.415	9.78	10.54	
G	.370	.420	9.40	10.67	4
H	.305	.355	7.75	9.02	
J	.850	.870	21.59	22.1	
K	.670	.690	17.02	17.53	
L	.330	.350	8.38	8.89	
M	.850	.870	21.59	22.1	
N	.670	.690	17.02	17.53	
O	.330	.350	8.38	8.89	
P	.190	.210	4.83	5.33	
R	.096	.106	2.44	2.69	5
S	.765	.785	19.43	19.94	
T	.030	.065	0.76	1.65	
V	.075	.105	1.91	2.67	6
W	.075	–	1.91	–	7

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Lead spacing measured at seating plane.
3. The collector shall be electrically connected to the case.
4. All three leads.
5. All four holes.
6. All eight locations.
7. All four locations.
8. In accordance with ASME Y14.5, diameters are equivalent to Øx symbology.

FIGURE 1. Physical dimensions of transistor types 2N1722 (TO-53).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

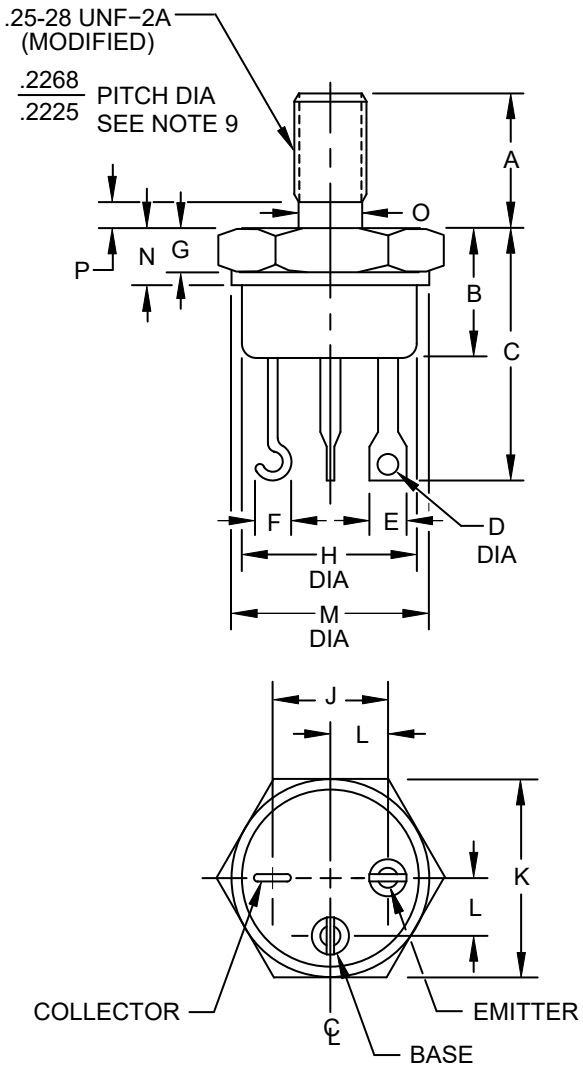

Letter	Dimension				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.422	.455	10.72	11.56	
B	.325	.460	8.26	11.68	
C	.640	.875	16.26	22.22	6
D	.047	.072	1.19	1.83	7
E	.095	.115	2.41	2.92	7
F		.150		3.81	
G	.090	.150	2.29	3.81	
H	.570	.610	14.48	15.49	
J	.340	.415	8.64	10.54	
K	.667	.687	16.94	17.45	8
L	.170	.213	4.32	5.41	
M	.610	.687	15.49	17.45	
N		.270		6.86	
O	.220	.249	5.59	6.32	
P		.090		2.29	

NOTES:
1. Dimensions are in inches, millimeters are given for general information only.
2. The collector shall be electrically connected to the case.
3. Lead spacing measured at seat only.
4. Position of leads in relation to hex is not controlled.
5. Maximum recommended mounting torque: 20 in-lb (2.26 Nm).
6. All three leads.
7. Two leads.
8. All three locations.
9. Threads in accordance with FED-STD-H28.
10. In accordance with ASME Y14.5, diameters are equivalent to Øx symbology.

FIGURE 2. Physical dimensions for transistor types 2N1724 (TO-61).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows.

$R_{\theta JA}$	Thermal resistance junction to ambient.
$R_{\theta JC}$	Thermal resistance junction to case.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figure 1 (TO-53) and figure 2 (TO-61) herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.8 Workmanship. Transistors shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified in table II herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

4.3 Screening (quality level JANTX only). Screening shall be in accordance with table E-IV of MIL-PRF-19500 and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurement
	JANTX level
2	Required, T_A = +200 °C
3c (1)	Thermal impedance (see 4.3.2)
9	I_{EBO}, I_{CES}, and h_{FE1}
11	I_{EBO}, I_{CES}, and h_{FE1} ΔI_{EBO} = 100 percent of initial value or 100 µA dc, whichever is greater. ΔI_{CES} = 100 percent of initial value or 100 µA dc, whichever is greater. Δh_{FE1} = ±15 percent of initial value.
12	See 4.3.1; 168 hours minimum
13	Subgroup 2 of table I herein; I_{EBO}, I_{CES}, and h_{FE1} ΔI_{EBO} = 100 percent of initial value or 100 µA dc, whichever is greater. ΔI_{CES} = 100 percent of initial value or 100 µA dc, whichever is greater. Δh_{FE1} = ±15 percent of initial value.

4.3.1 Power burn-in conditions. Power burn-in conditions shall be as follows: V_{CE} = 10 to 30 V dc; power shall be applied to achieve T_J = +175 °C minimum using a minimum power dissipation = 75 percent of maximum rated P_T (see 1.3). NOTE: No heat sink or forced air cooling on the devices shall be permitted.

4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{SW}, (and V_H where appropriate). See table II, subgroup 4 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIB (JAN and JANTX) of MIL-PRF-19500 and herein. Delta measurements shall be in accordance with the applicable steps of 4.5.3 herein.

Subgroup	Method	Condition
B3	1037	V_{CB} ≥ 10 V dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and herein.

Subgroup	Method	Condition
C2	2036	Test condition A; weight = 10 pounds (4.54 Kg); time = 15 s.
C2	2036	Test condition D1 (2N1724 only); torque = 6 inch-ounce (43.4 mNm); time =15 s.
C2	2036	Stud torque (2N1724 only), test condition D2; torque = 15 inch-pound (1.7 Nm) time = 15 s.
C5	3131	See 4.3.2, $R_{\theta JC}$ = 1.5 °C/W.
C6	1037	V_{CB} ≥ 10 V dc.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table II herein. Delta measurements shall be in accordance with the applicable steps of 4.5.3.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Inspection conditions. Unless otherwise specified herein, all inspections shall be conducted at a case temperature (T_C) of +25 °C.

4.5.3 Delta measurements. Delta measurements shall be as specified below: (1) (2) (3) (4)

Steps	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Collector to emitter cutoff current	3041	Bias condition C, V_{CE} = 60 V dc	ΔI_{CES1}	100 percent of initial value or 50 µA, whichever is greater.		
2.	Forward current transfer ratio	3076	I_C = 2 A dc, V_{CE} = 15 V dc, pulsed (see 4.5.1)	Δh_{FE1}	±20 percent change from initial reading		

(1) The delta measurements for group B inspection for quality levels JAN and JANTX (table E-VIB of MIL-PRF-19500) shall be as follows:
   a. In addition to the measurements specified for subgroup 3, the measurements of steps 1 and 2 of this table shall also be taken.
   b. In addition to the measurements specified for subgroup 6, the measurements of steps 1 and 2 of this table shall also be taken.

(2) The delta measurements for group C inspection (table E-VII of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroup 6, the measurements of steps 1 and 2 of this table shall also be taken.

(3) The delta measurements for group E, table II herein, shall be as follows: In addition to the measurements specified for subgroups 1 and 2, the measurements of steps 1 and 2 of this table shall also be taken.

(4) Devices which exceed the table I limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3131	See 4.3.2	$Z_{\theta JX}$			°C/W
Collector to base breakdown voltage	3011	Bias condition D, I_C = 200 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$	80		V dc
Emitter to base breakdown voltage	3026	Bias condition D, I_E = 10 mA dc; pulsed (see 4.5.1)	$V_{(BR)EBO}$	10		V dc
Collector to emitter cutoff current	3041	Bias condition C, V_{CE} = 60 V dc	I_{CES1}		300	µA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 175 V dc	I_{CBO}		5	mA dc
Emitter to base cutoff current	3061	Bias condition A, V_{EB} = 7 V dc	I_{EBO}		400	µA dc
Base emitter voltage	3066	Test condition A; I_B = 200 mA dc; I_C = 2 A dc; pulsed (see 4.5.1)	$V_{BE(sat)1}$		1.2	V dc
Collector to emitter saturated voltage	3071	I_C = 2 A dc; I_B = 200 mA dc; pulsed (see 4.5.1)	$V_{CE(sat)1}$		0.6	V dc
Forward-current transfer ratio	3076	V_{CE} = 15 V dc; I_C = 2 A dc; pulsed (see 4.5.1)	h_{FE1}	30	120	
Forward-current transfer ratio	3076	V_{CE} = 15 V dc; I_C = 5 A dc; pulsed (see 4.5.1)	h_{FE2}	15		
Forward-current transfer ratio	3076	V_{CE} = 15 V dc; I_C = 100 mA dc; pulsed (see 4.5.1)	h_{FE3}	30		
Subgroup 3						
High-temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition C; V_{CE} = 60 V dc	I_{CES2}		1.5	mA dc
Collector to emitter cutoff current	3041	Bias condition C, V_{CE} = 120 V dc	I_{CES3}		10	mA dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 3 – continued						
Low-temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 15 V dc, I_C = 2 A dc; pulsed (see 4.5.1)	h_{FE4}	15		
Subgroup 4						
Magnitude of common emitter small-signal short-circuit forward- current transfer ratio	3306	V_{CE} = 15 V dc, I_C = 500 mA dc, f = 10 MHz	$\|h_{fe}\|$	1.0	8	
Open capacitance (open circuit)	3236	V_{CB} = 15 V dc, I_E = 0, 100 kHz ≤ f ≤ 1.0 MHz	C_{obo}		550	pF
Subgroup 5						
Safe operating area (dc operation)	3051	t = 60 s, 1 cycle, t_r ≤ 6 sec, t_f ≤ 6 sec, 1 cycle; (see figure 3)				
Test 1		T_C = +100°C, V_{CE} = 10 V dc, I_C = 5 A dc				
Test 2		T_C = +145°C, V_{CE} = 80 V dc, I_C= 250 mA dc				
Safe operating area (unclamped switching)	3053	Load condition C, T_A = +25°C, R_{BB1} = 5 Ω, R_{BB2} = 10 Ω, V_{BB2} = 5 V dc, (see figure 4)				
Test 1		I_C = 5 A dc, V_{BB1} = 15 V dc, V_{CC} = 18 V dc, L = 2 mH, .56 Ω (2 are used, or equivalent)				
Test 2		I_C = 1 A dc, V_{BB1} = 8 V dc, V_{CC} = 13.5 V dc, L = 20 mH, .22 Ω (2 are used, or equivalent)				
Safe operating area (clamped switching)	3053	Load condition B, T_A = +25°C, I_C = 5 A dc, V_{CC} = 175 V dc, V_{BB1} = 15 V dc, V_{BB2} = 5.0 V dc, R_{BB1} = 5 Ω; R_{BB2} = 10 Ω; R_L = 35 Ω; L = 20 mH (see figure 5)				

1/ For sampling plan, see MIL-PRF-19500.
2/ This test required for the following end-point measurements only:
Group B, subgroups 2 and 3 (JAN and JANTX).
Group C, subgroup 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) - for qualification or re-qualification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			45 devices, c = 0
Temperature cycling (air to air)	1051	Test condition C, 500 cycles.	
Hermetic seal	1071	Fine and gross leak.	
Electrical measurements		See table I, subgroup 2 and 4.5.3 herein.	
Subgroup 2			45 devices, c = 0
Intermittent life	1037	V_{CB} ≥ 10 V dc, 6,000 cycles.	
Electrical measurements		See table I, subgroup 2 and 4.5.3 herein.	
Subgroup 4			
Thermal impedance curves		See table E-IX, subgroup 4 of MIL-PRF-19500.	
Subgroup 5			
Not applicable			
Subgroup 8			45 devices, c = 0
Reverse stability	1033	Condition B.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

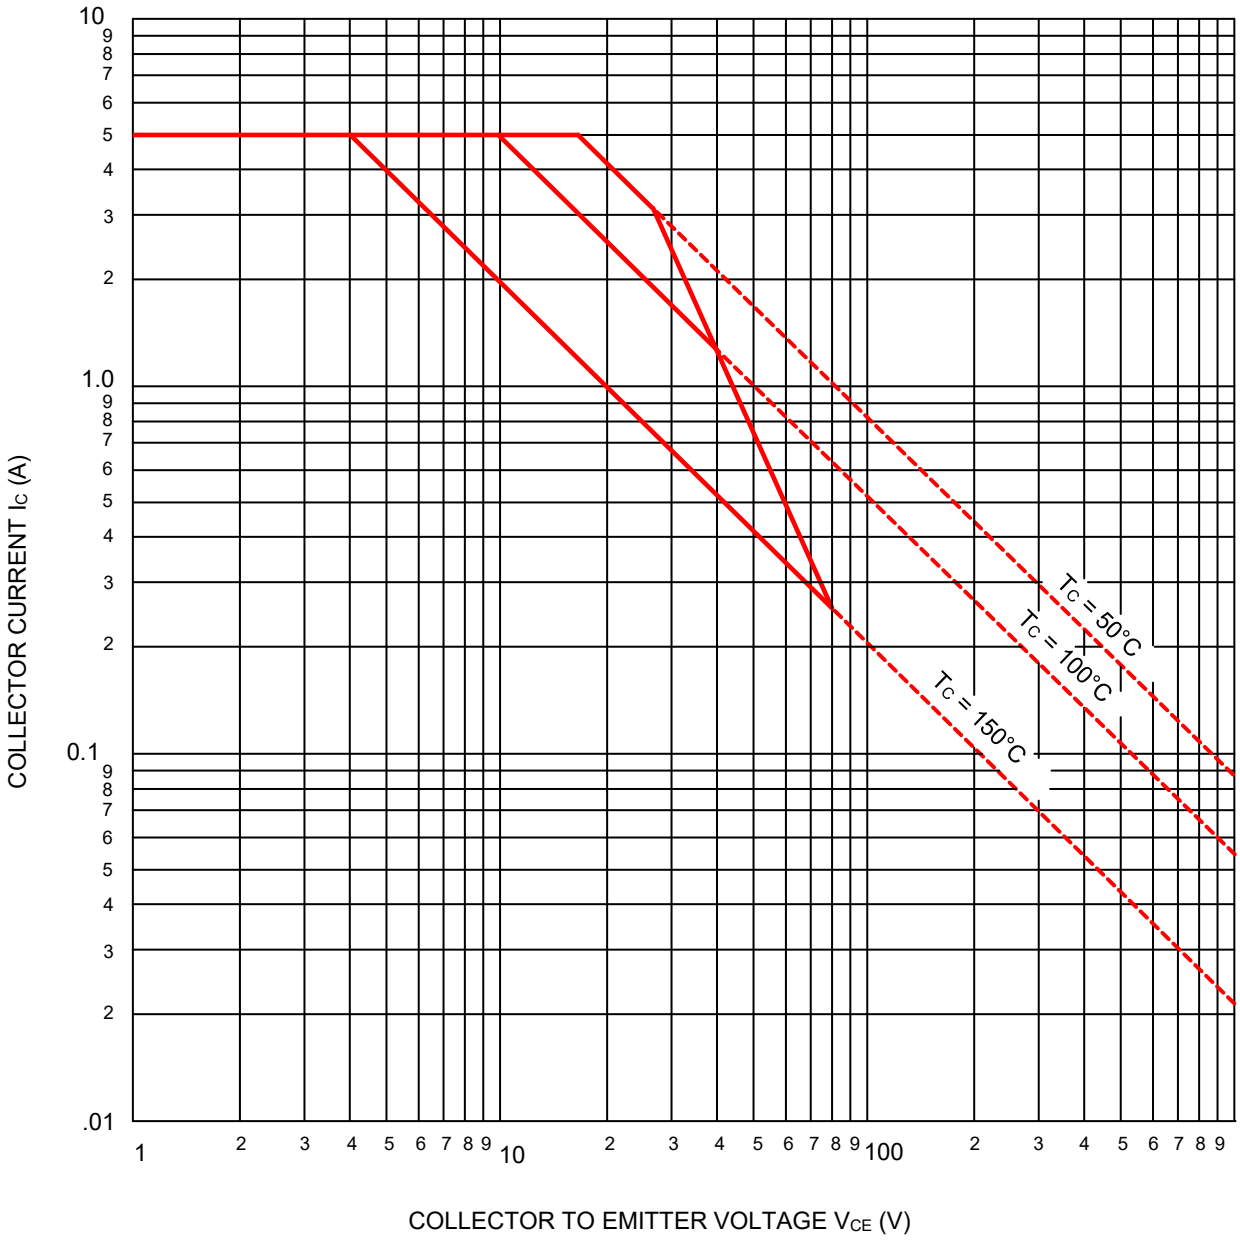


FIGURE 3. Safe operating area test graph (DC operation).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

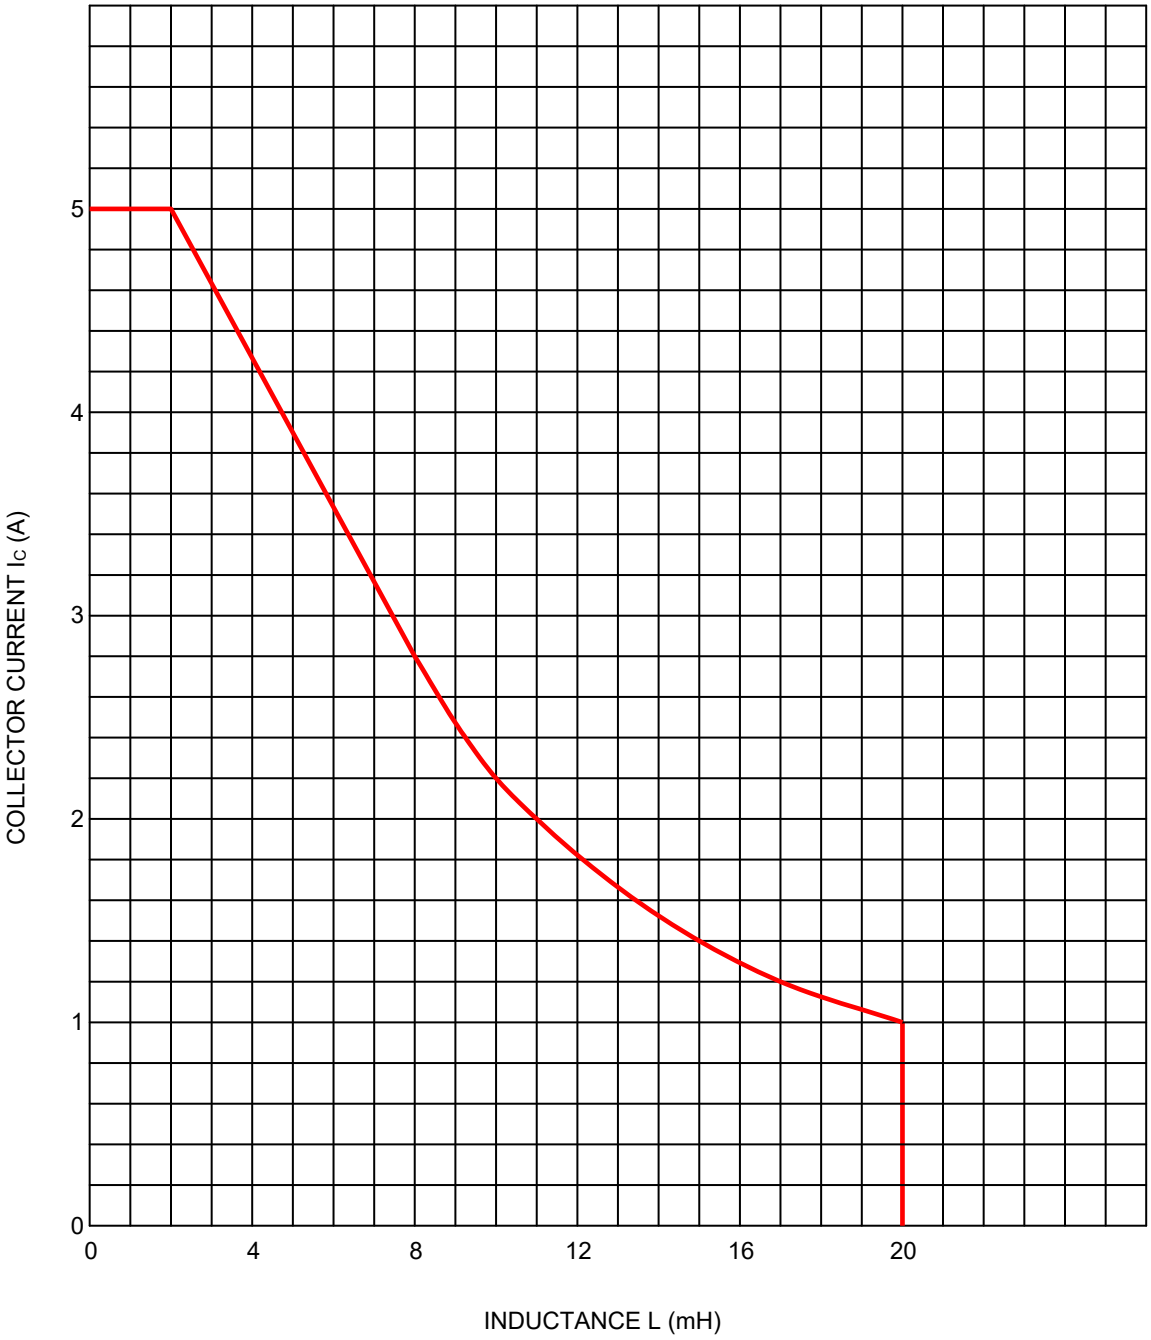


FIGURE 4. Safe operating area for switching between saturation and cutoff - unclamped inductive load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

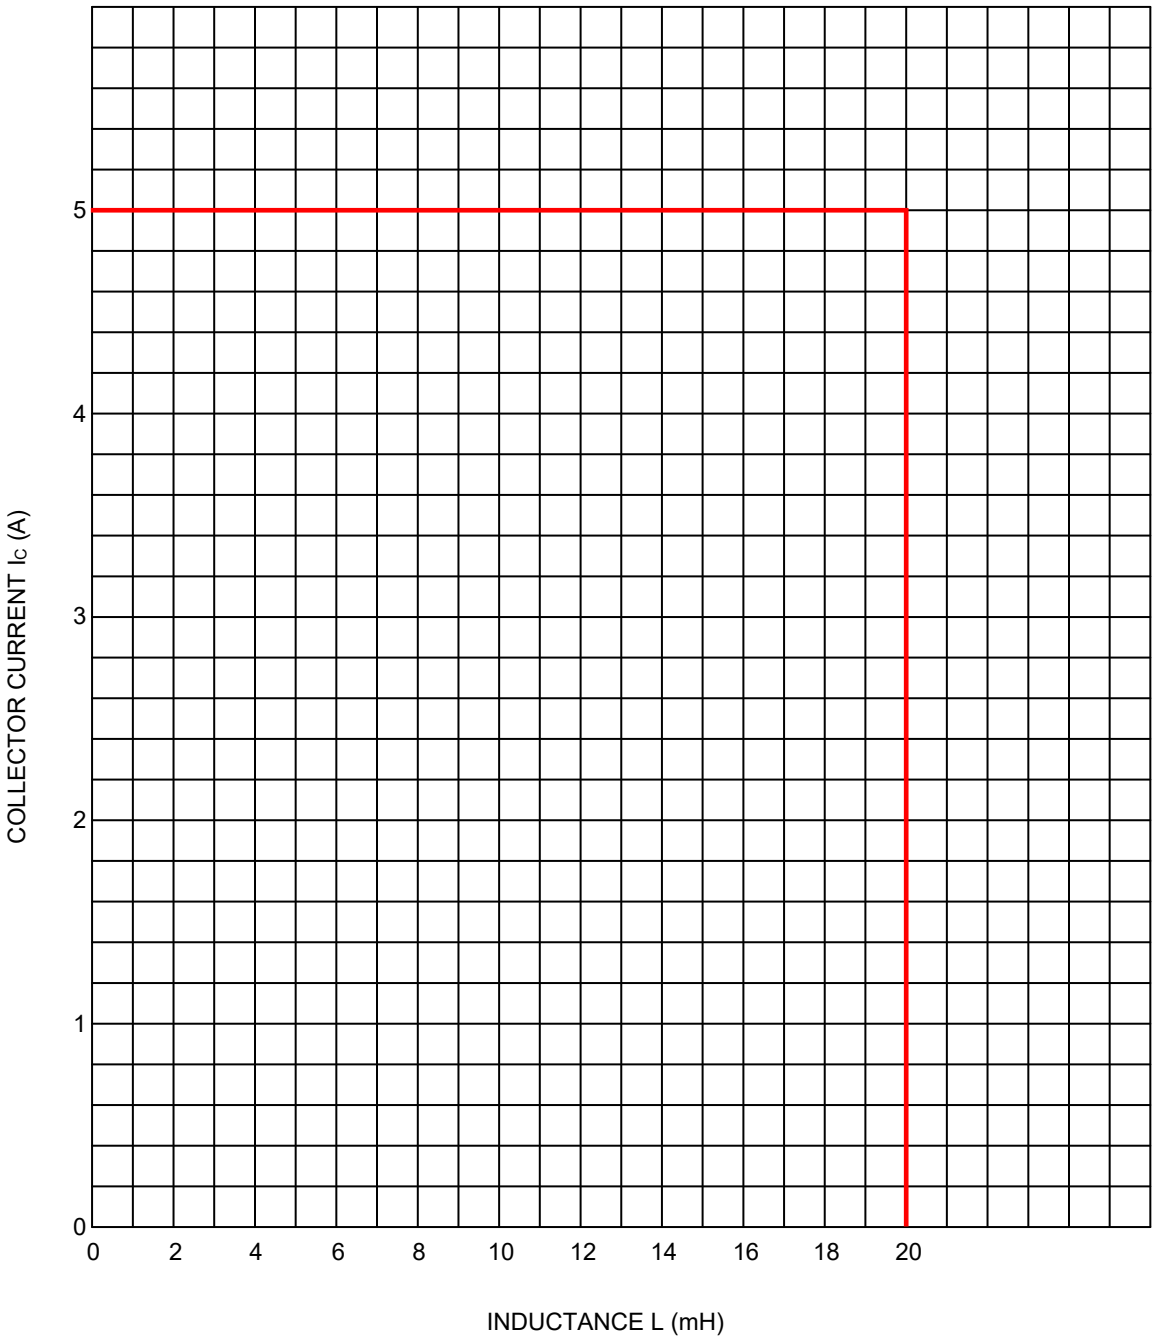


FIGURE 5. Safe operating area for switching between saturation and cutoff - clamped inductive load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).


c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

e. The complete PIN, see 1.5 and 6.4.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are in the following form.

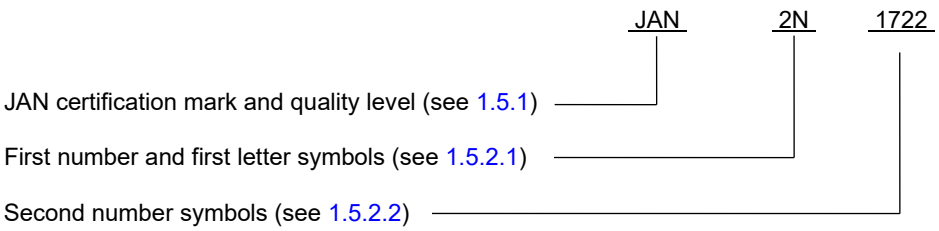

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.

6.5 List of PINs. The following is a list of possible PINs available on this specification sheet.

PINs for devices in a TO-53 package	PINs for devices in a TO-61 package
JAN2N1722	JAN2N1724
JANTX2N1722	JANTX2N1724

6.6 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil or by facsimile (614) 693-1642 or DSN 850-6939.

6.7 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − AR
Navy − AS, CG, MC, OS
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961−2021−063)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:57Z
Check the source to verify that this is the current version before use.