RR-F-575B
AMENDMENT-1
November 6, 1972

FEDERAL SPECIFICATION

FOOD TURNERS

This amendment which forms a part of Federal Specification RR-F-575B, dated August 11, 1970, was approved by the Commissioner, Federal Supply Service, General Services Administration, for use by all Federal Agencies.

PAGE 1

1.2, after "Type I - Solid blade".- Delete "(plastic handle)".

PAGE 3

2.2 Add in proper sequence under "American Society for Testing and Materials (ASTM) Standards:"

"D2016-65 - Standard Method of Test for Moisture of Wood."

Delete "National Classification Board" and substitute:

"National Motor Freight Traffic Association, Inc., Agent:"

After "Uniform Classification Committee" delete ":" and substitute ", Agent".

Delete parenthetical note under "Uniform Freight Classification" and substitute:

"(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)"

3.1 Delete in its entirety and substitute:

"3.1 First article.- When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2 and 6.3)."

PAGE 4

3.4.1 Delete in its entirety and substitute:

"3.4.1 Type I, solid blade.- The type I food turners shall be Class A conforming to figure 1, or class B conforming to figure 2, as specified (see 6.2)."

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the currentversion before use.

PAGE 4 (con.)

3.4.1.1 Delete and substitute:

"3.4.1.1 Handles.- The handles for the type I turners shall be either polypropylene plastic conforming to type I of L-P-394, or wood at the option of the manufacturer. Wood for the handles shall be either Beech, Birch, Walnut, Ebony, Rosewood or Hard Maple. The wood shall be thoroughly and uniformly dried without case hardening or honey combing. Before fabrication, the wood shall have a moisture content of not more than 15 percent when tested in accordance with 4.3.1.1. Finished parts shall be free from decay, knots, or other defects that may affect serviceability or appearance of the item. The handles shall be two piece, solid slotted or molded. The two piece handle shall have a tang extending the full width and length of the handle and shall fit flush with the tang. The handle shall be rounded on the sides and edges. The solid slotted handle shall have a tang extending the full width and not less than one-half the length of the handle and shall fit flush on the sides and the tang shall be in contact with the bottom of the slot. The plastic molded handle shall be molded to the tang, or shank and shall have smooth, rounded surfaces on the sides and ends. The fit between the handles and tangs shall be close and uniform at all points. The plastic molded handles shall have a hole in the end of sufficient size to allow the turner to be hung from a hook. The handles shall withstand a temperature of 190 F $\pm$ 5 F, without warping or loosening when tested as specified in 4.5.1 and shall not pull loose from the tang when tested as specified in 4.5.4."

PAGE 6

4.2 Delete "preproduction sample" and substitute "first article" in lines 1, 5 and 7.

Add "4.3.1.1 Moisture content of wood.- Wood used for the handles shall be tested in accordance with ASTM D2016-65 to determine compliance with the moisture content requirements specified in 3.4.1.1."

Delete table I and substitute:

TABLE I. Defects

Examine	Defect
Standard product	Item not in accordance with manufacturer's standard product except for changes necessary to comply with specification requirements
Finish	Finish not as specified

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

PAGE 6 (con.)

TABLE I. Defects (con.)

Examine	Defects
Construction and workmanship	Not in accordance with specified design requirements. Cracks, sharp edges (except class A) burrs, nicks, ruts, pits
Type I	Handles not as specified Handle and tang not flush Hole in plastic handle missing Rivets not as specified Rivets missing Blade not as specified One edge of class A blade not sharpened Handle warped or loose
Type II	Handle not plastic Hole in handle missing Slots in blade missing
Identification marking	Missing, incomplete, incorrect, illegible, or not as specified

PAGE 7

4.3.2.3 Add the following sentence: "Failure of any test shall be cause for rejection of the affected item and the lot in process."

PAGE 9

4.5.4 Delete and substitute:

"4.5.4 Handle test.- The tang of the type I turners with molded handles and the tang of the type II turner shall be held in a holding device and a pull force, of not less than 25 pounds shall be applied to the molded plastic handle in a direction parallel to the tang to determine conformance with handle fastness of 3.4.1.1 and 3.4.2.1. Any nonconformance to specified requirements shall constitute failure of this test."

PAGE 10

6.2(c) Delete and substitute: "(c) When a first article is required (see 3.1, 4.2 and 6.3)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

PAGE 11

Add "6.3 First article.- When a first article is required, it shall be inspected and approved under the appropriate provision of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a First Article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurment instruments regarding arrangements for inspection and approval of the first article."

6.5 Delete in its entirety.

PAGE 12

Figure 1 Delete and substitute attached Figure 1.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC

User activity:

Navy - MS

Preparing activity:

Army - GL


Civil Agency Coordinating Activities:

GSA-FSS
VA-DMS

Project No. 7330-0439

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

NOTE: ------ DOTTED LINES SHOW ALTERNATE METHOD OF CONSTRUCTION.

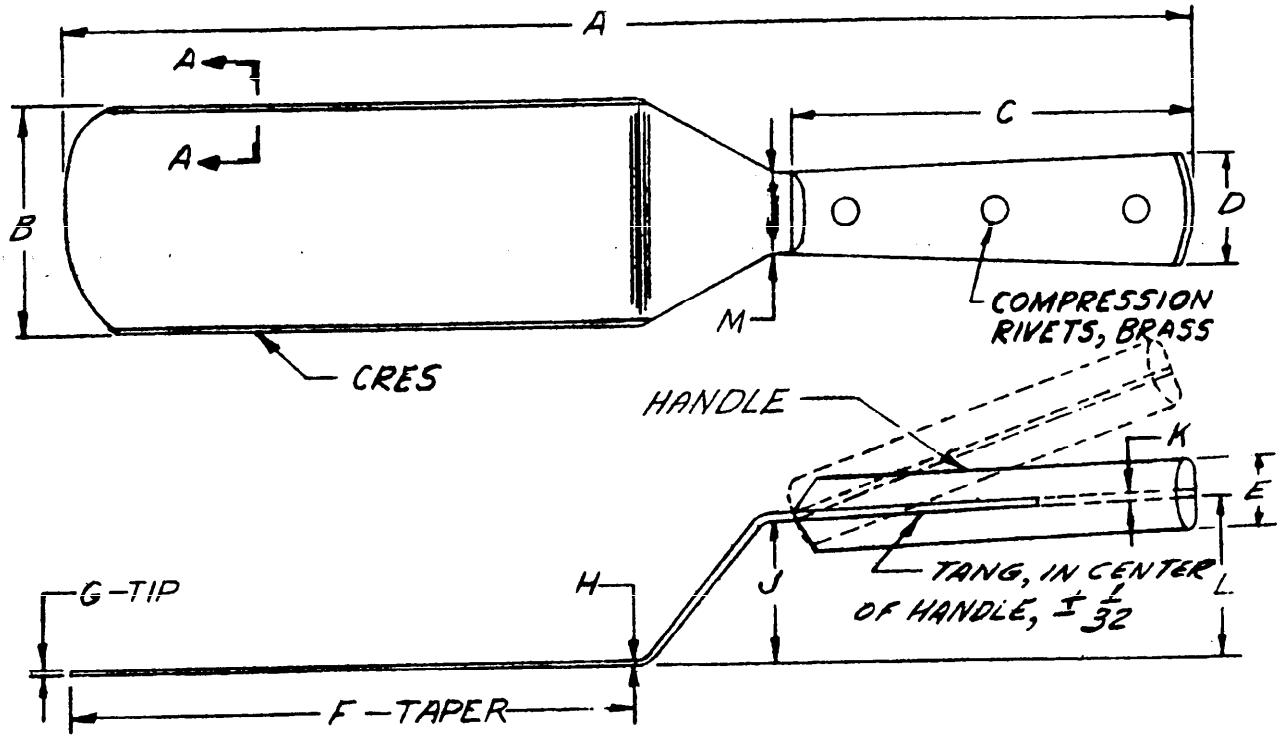



SECTION A-A

DIMENSIONS IN INCHES																							
A		B		C		D		E		F		G		H		J		K		L		M	
MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
14	15	2 3/4	3 1/4	4 13/16	5 3/4	1 1/16	1 3/8	5/8	15/16	7	8	.030	.040	.050	.060	1 5/16	1 7/16	.060	.078	3	3 3/4	15/16	1 1/8

FIGURE 1 FOOD TURNER, TYPE I, CLASS A

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.