RR-G-681C
October 27, 1977
SUPERSEDING
Fed. Spec. RR-G-681B
March 1, 1967

FEDERAL SPECIFICATION

GRIDDLE PLATE, CAST IRON

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers a rectangular cast iron griddle plate with handles.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing
PPP-T-60	-	Tape: Packaging, Waterproof

Federal Standard:

FED-STD-123	-	Marking for Shipment (Civil Agencies)

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116 - Preservation, Methods Of
MIL-B-121 - Barrier Material, Greaseproof, Waterproofed, Flexible

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Sanitation Foundation (NSF)

Basic Criteria C-2 - Special Equipment and Devices
Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468 Ann Arbor, MI, 48106.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc. Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. The griddle plate shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product with any added features needed to comply with the requirements of this specification.

3.2 Standard compliance. The griddle plate covered by this specification shall conform to the applicable requirements of NSF Basic Criteria C-2.

3.2.1 NSF compliance. Prior to approval of first shipment, the contractor shall submit to the contracting officer or his authorized representative satisfactory evidence that the griddles he proposes to furnish under this specification meet the applicable requirements of NSF Basic Criteria C-2. Satisfactory evidence of this compliance shall be any of the following:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" and display of the NSF seal on the furnished griddle or

(2) A certification for the griddle issued by NSF under their special one time contract evaluation/certification service or

(3) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the griddles are procured, indicating that the griddles have been tested and conform to NSF Basic Criteria C-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.3 Design. The griddle plate shall be rectangular in shape with lifting handles centered on each end, shaped and positioned so that the fingers can be inserted under them without restrictions, while the griddle is lying on a flat surface. The plate shall be constructed as specified herein and in Figure 1, which is included for illustrative purposes, except for the dimensions shown and is not intended to preclude procurement of griddle plates otherwise meeting all specification requirements.

3.4 Construction. The griddle plate and handles shall be one piece cast iron. The top and bottom surfaces shall be parallel, and shall have continuous,uniform raised edges above and below the surfaces. At the option of the supplier, reinforcing ribs may be provided on the bottom surface. For griddle plates with reinforcing ribs the thickness exclusive of ribs, shall be not less than 1/4 inch (6.4 mm). For griddle plates without reinforcing ribs the thickness shall not be less than 3/8 inch (9.6 mm). The griddle plate shall not break, crack, or permanently deform when load tested as specified in 4.3.1 and impact tested as specified in 4.3.2. The griddle plate shall weigh not less than 18 pounds (8.2 kg) when weight tested as specified in 4.3.3.

3.5 Marking. The manufacturer shall permanently and legibly indent his name or trademark of such known character easily identifiable with said manufacturer, on each griddle.

3.6 Workmanship. Griddles shall be clean, free of imbedded foreign material, pits, blow holes, porosity, cracks, chips, fractures, fissures and deformities. The finished griddle shall be free of rust, burrs and sharp edges.Handles shall be smooth and free of rough surfaces and any other defect that may cause injury.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, in the contract, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling for inspection shall be in accordance with the provisions set forth in MIL-STD-105, unless otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

4.2.2 End item inspection. A lot shall consist of all griddles offered for inspection at one time. The sample unit shall be one completely fabricated griddle.

4.2.2.1 Visual examination. Examination shall be made of the completely fabricated griddle for the defects shown in table I. The inspection level shall be level II with an AQL of 2.5 for major defects, and 4 for total defects expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Cooking surface	Porosity pits, blowholes, imbedded foreign material	X	
Construction	Not cast iron	X	
	Handles or handle missing	X	
	Reinforcing ribs missing (when applicable)	X	
	Raised edge missing or incomplete	X	
Design	Handles not centered on ends of griddle	X	
	Finger space under handles restrictive	X	
	Corners not rounded	X	
Workmanship	Fractures, cracks, deformities, chips, blow holes, fissures	X	
	Dirty, sharp edges, burrs, rust	X	
	Sharp edges, burrs, rough surfaces on handles	X	
Marking	Missing, incorrect, illegible		X
	Special marking not provided when specified	X	
	Manufacturers name or trademark not indented on griddle		X

4.2.2.2 Dimensional examination. Examination shall be made for dimensions specified. Any nonconformance shall be considered a defect. The inspection level shall be S-2 with an acceptable quality level (AQL) of 6.5 expressed in terms of defects per hundred units.

4.2.2.3 End item testing. The griddle plates shall be load tested as specified in 4.3.1, impact tested as specified in 4.3.2, and weight tested as specified in 4.3.3. The inspection level shall be S-2 with an AQL of 2.5 expressed in terms of defects per hundred units. Any nonconformance with specified requirements shall constitute a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

4.2.3 Standard compliance. Proof of compliance with the requirements of 3.2.1 shall be made available to the Government representative.

4.3 Tests.

4.3.1 Load test. Weights totalling not less than 100 pounds (46 kg) shall be evenly distributed on the cooking surface. The griddle plate shall then be lifted by the handles to a clear height of not less than 12 inches (305 mm). The griddle plate and handles shall then be examined to determine compliance with the load requirements specified in 3.4.

4.3.2 Impact test. The griddle plate shall be supported in a level position on two metal supporting edges having bearing surfaces not more than 1/4-inch (6.4 mm) in width and in full contact with the griddle plate. A 3 pound (1.4 kg) steel ball shall be dropped from a clear height of not less than 18 inches (457 mm) onto the center of the cooking surface of the supported griddle plate. The griddle plate shall then be examined to determine compliance with the impact requirements specified in 3.4

4.3.3 Weight test. The griddle plate shall be weighed on a scale, certified accurate for trade, to determine compliance with the weight requirement specified in 3.4

4.4 Packaging inspection. An examination shall be made to determine that preservation-packaging, packing and marking comply with the requirements of section 5. Defects shall be as listed in table II. The lot shall be one shipping container fully prepared for delivery, except it need not be closed. The inspection level shall be I, and the AQL shall be 4.0 expressed in terms of defects per hundred units.

TABLE II. Packaging inspection

Examine	Defect
Marking (exterior and interior)	Missing, incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Contents	Number per container is not as specified
Workmanship	Containers bulged or distorted.

4.4.1 Inspection of shipping containers. When shipping containers are required to comply with PPP-B-636, examination for defects in the closure and reinforcing shall be in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation-packaging. Preservation-packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Preservation. Each griddle shall be cleaned process C-1, thoroughly dried, and coated with type P-14 preservative in accordance with the requirements of MIL-P-116. The griddle shall then be completely wrapped, including the handles, with greaseproof barrier-material conforming to type II, grade A, class 2 of MIL-B-121. The wrap shall be secured with tape conforming to type III, grade B, of PPP-T-45, class 1 type III or IV of PPP-T-60, or cotton tape or twine, or heat sealed when heat-sealable barrier-material is used.

5.1.1.2 Unit packaging. Each griddle, preserved as specified in 5.1.1.1, shall be packaged in a fiberboard folder conforming to style OPF, type CF, variety optional, class domestic, grade 200 of PPP-B-636. The folder shall be sufficiently large to allow 1/2-inch (12 mm) clearance between end of handle and the end of folder. Clearance shall be maintained by means of inner packaging such as buffer pads, corner pads, cell spacers, die-cut pads, built-up pads, from scored sheets of the same material as the box, and placed at each side of each handle to prevent damage to the griddle while in transit. Each folder shall be closed in accordance with the appendix of the box specification.

5.1.2 Level C. Griddles shall be preserved-packaged to afford adequate protection against corrosion, deterioration, and damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A packing. Four griddles, preserved-packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style FTC, grade V2s of PPP-B-636. Each shipping container shall be closed and reinforced as specified in the appendix of PPP-B-636.

5.2.2 Level B packing. Four griddles preserved-packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC, type CF (variety SW) or type SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be reinforced as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

5.2.3 Level C packing. Griddles, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall be in accordance with National Motor Freight Classification or Uniform Freight Classification, as applicable.

5.3 Marking. Marking shall be in accorance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The griddle plate covered by this specification is intended to be used on a range for cooking griddle cakes, hamburgers, and other foods in the field, in kitchens, or in galleys.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Selection of the applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(c) Packaging marking required (see 5.3).

6.2.2 Contract data requirements. Any requirements for contract data items,such as equipment manuals for the items covered by this specification should be included in DD Form 1423, Contract Data Requirements List, and cited in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

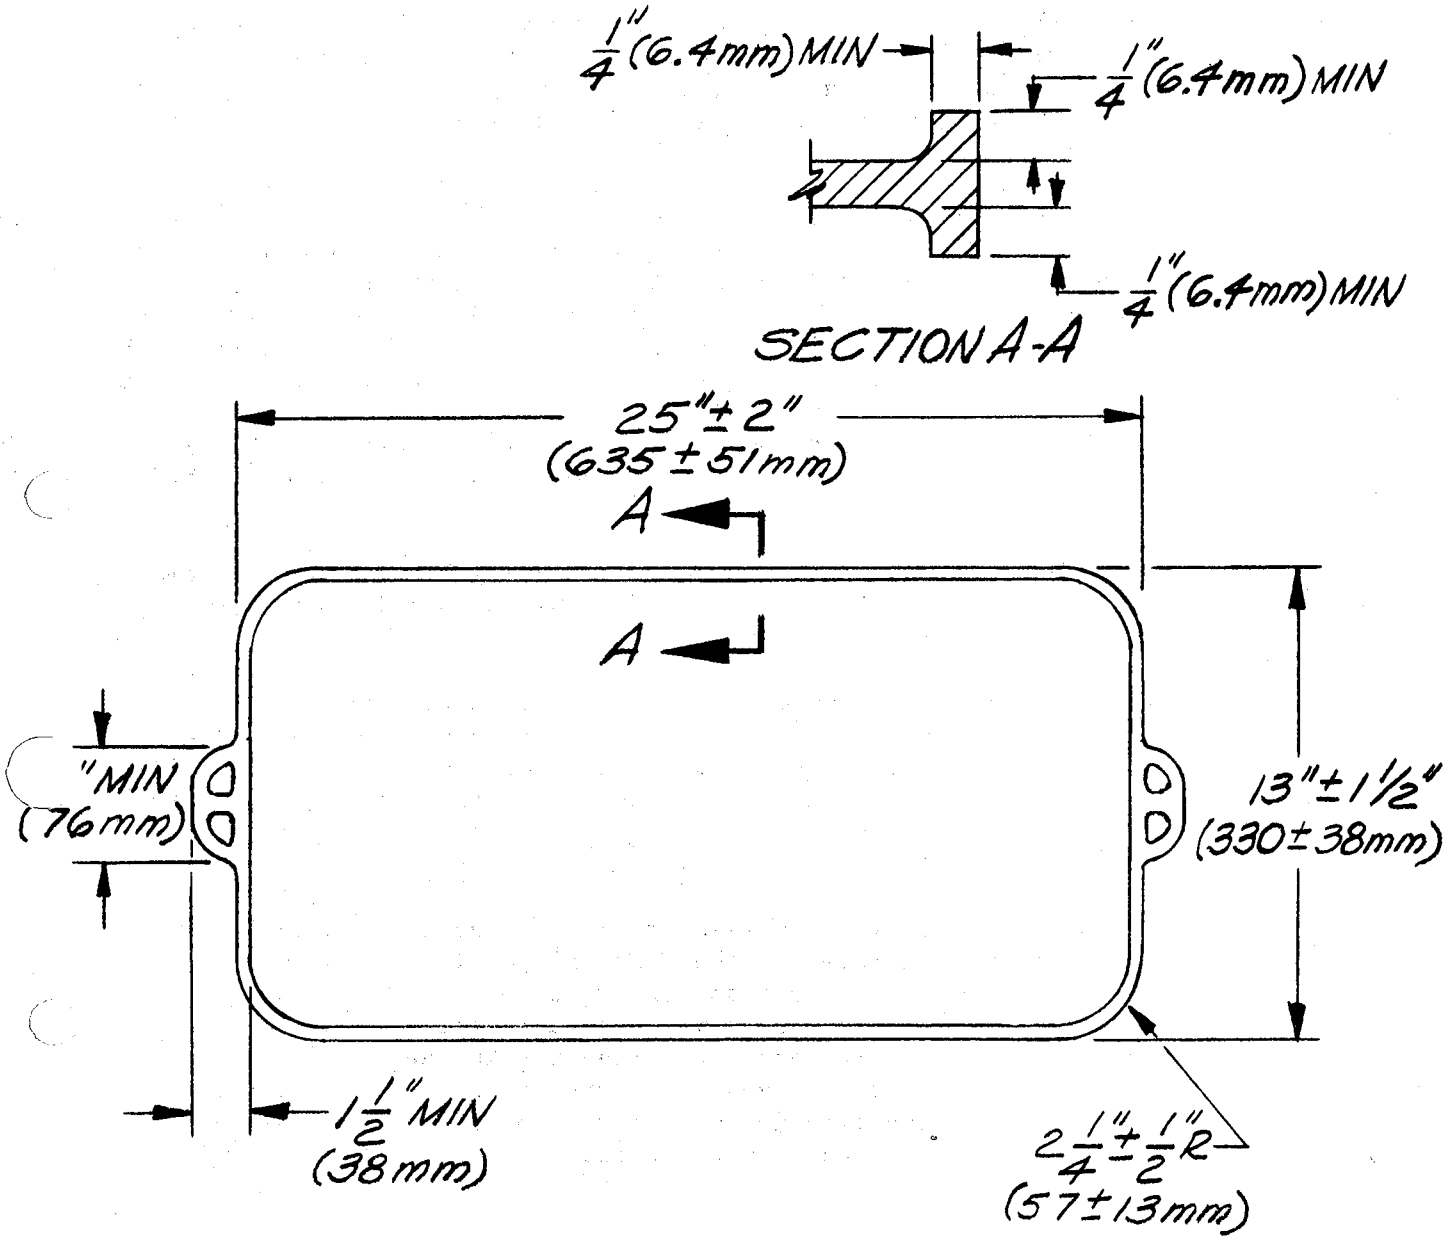


FIG. 1 GRIDDLE PLATE

6-1-5931

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA

Review activities:

Army - MD
Navy - MC

User activities:

Navy - MS

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

GSA-FSS

Project No. 7330-0504

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.