RR-H-450B
April 21, 1980
SUPERSEDING
Fed. Spec RR-H-450A
October 10, 1973

FEDERAL SPECIFICATION

HOLDER, CARD-LABEL: POST OFFICE MAILBAG RACK

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers one size and type of sheet metal card-label holder for mailbag racks made of pipe.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification, other Federal specifications, and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston; New York; Washington, DC; Philadelphia; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; San Francisco, Los Angeles; and Seattle, WA.

(Federal Government activities may obtain copies of Federal specifications, standards, and commercial item descriptions, and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards, required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committe, Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Standard commercial product. The card-label holder shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the card-label holder being furnished. A standard commercial product is a product which, has been sold or is being currently offered for sale, on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.2 First article. When specified (see 6.2), the contractor shall furnish a card-label holder for first article inspection and approval (see 4.2 and 6.3).

3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified. The holder shall be made of 16-gage (.0598-inch) sheet metal with limits of .0568-inch to .0635-inch. The screws shall be the self-tapping type with slotted tapered head, made of steel, hardened and cadmium plated. Two screws shall be furnished with each card label holder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.4 Construction. The card-label holder shall conform substantially to the dimensions and type as shown in figure 1. Holes for screws shall be countersunk to bring the screwhead flush with the surface plane of the holder. The lower edges of the countersunk holes and end flanges shall be of such dimensions that, when assembled, they will make four points of contact with the surface of the pipe. Longitudinal edges shall be bent back to provide positive retention of the label. Each end shall be flanged 90° and have a radius to suit a 3/4-inch pipe surface.

3.5 Finish. Sheet steel shall be given a protective coating of zinc or cadmium after fabrication. Aluminum or other corrosion-resistant metal shall have natural finish. Surfaces of the holders shall be clean and smooth with no burrs or rough spots. All edges and corners shall be beveled smooth.

3.6 Identification plate. The contracting officer will furnish to the Government inspector, the required identification plates. The contractor will be required to stamp the necessary data in the blank spaces thereon and securely affix said plates in a conspicuous place on each unit, assembly and/or subassembly, and parts as directed by the Government inspector. Nonferrous screws, rivets, or bolts of not less than 1/8 inch in diameter shall be used to affix the plates. Nomenclature shall be "HOLDER, CARD LABEL."

3.7 Identification plate. An identification plate will be furnished by the contracting officer for each card-label holder. The contractor shall stamp all necessary data in the blank spaces of the plate provided for that purpose, and securely affix a plate to each card-label holder in a conspicuous place with brass screws or bolts not less that 1/8 inch in diameter. The applicable nomenclature contained in the contract item description shall be placed in the top blank.

3.8 Workmanship. The quality of workmanship shall be such as to produce card-label holders that are in accordance with the requirements of this specification and are so constructed as to ensure proper functioning of all parts of the unit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.2.1).
(b) Quality conformance inspection (see 4.2.2).
(c) Preparation for delivery inspection (see 4.7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.2.1 First article inspection. First article inspection shall be performed on one complete holder when a first article sample is required (see 3.2 and 6.2). This inspection shall include the examination of 4.5 and the tests of 4.6. The first article may be a standard production item from the contractor's current inventory, provided the holder meets the requirements of this specification and is representative of the design, construction, and manufacturing technique applicable to the remaining holders to be furnished under the contract.

4.2.2 Quality conformance inspection. Quality conformance inspection shall be performed on the sample holder selected in accordance with 4.4. The inspection shall include the examination of 4.5 and the tests of 4.6.

4.3 Inspection lot. All units offered to the Government at one time shall be considered a lot for purpose of inspection. The sample unit shall be one complete card-label holder.

4.4 Sampling. A random sample holder shall be selected from each lot in accordance with MIL-STD-105.

4.4.1 Sampling for examination. Examination of the holder shall be based on inspection level S-3 and an Acceptable Quality Level (AQL) of 2.5 percent defective for major defect and 4.0 percent defective for minor defects.

4.4.2 Sampling for testing. Tests of the holders shall be based on inspection level S-3 and an AQL of 4.0 percent defective.

4.5 Examination. Each sample selected in accordance with 4.4.1 shall be examined for compliance with the requirements of section 3 of this specification. The examination shall be conducted as specified in table I.

TABLE I. Classification of defects.

Categories	Defects
Major:	
101	Countersink not as specified.
102	Screws not hardened, not self-tapping, not coated, not of specified size and type.
103	Dimensions not as specified.
Minor:	
201	Presence of sharp edges, burrs, or roughness.
202	Coating uneven or bare spots.

4.6 Testing. Each sample selected in accordance with 4.4.2 shall be tested to determine compliance with this specification by being mounted to 3/4-inch pipe as shown in figure 1.

4.7 Examination of preparation for delivery. An examination shall be made to determine compliance with the requirements of section 5. The sample unit shall be one shipping container fully prepared for delivery. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or commercial as specified (see 6.2).

5.1.1 Level A and B. The screws shall be packaged in a plastic bag or secured together with tape and attached to the holder. Each holder, with screws, shall be placed in a bag fabricated from plastic material with a minimum thickness of 2 mils. The bag shall be closed and sealed to prevent opening.

5.1.1.1 Consolidation. When specified (see 6.2), holders, packaged as specified in 5.1.1, shall be consolidated in quantities not to exceed 20 pounds, in boxes conforming to PPP-B-636, class weather-resistant.

5.1.2 Commercial. The holders of like description shall be packaged in accordance with normal commercial practice. The complete package shall be designed to protect the tags and holders against damage during shipment, handling, and storage.

5.2 Packing. Packing shall be level A, B, or commercial, as specified (see 6.2).

5.2.1 Level A. The holders, packaged as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, or PPP-B-636, V2s. The contents shall be blocked and braced to prevent movement inside the container or damaging of the contents.

5.2.2 Level B. Unless otherwise specified (see 6.2), the holders, packaged as specified in 5.1, shall be packed in boxes conforming to PPP-B-636, class domestic. When specified (see 6.2), the boxes shall conform to PPP-B-601, domestic type or PPP-B-636, V3c or V3s. The contents shall be blocked and braced to prevent movement inside the container or damaging of the contents.

5.2.3 Commercial. The holders of like description, packaged as specified in 5.2, shall be packed in fiberboard boxes to assure delivery at destination, provide for redistribution by the initial receiving activity, and be acceptable by common carrier under National Motor Freight Classification rules and Uniform Freight Classification rules.

5.3 Marking. Marking shall be as specified in the contract or order. When specified (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Card-label holders covered by this specification are intended to be used on mailbag racks made of pipe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should selected the preferred options offered herein and include the following:

(a) Title, number, and date of this specification.
(b) When a first article is required for inspection and approval (see 3.2, 4.2.1, and 6.3).
(c) Level of packaging and level of packing required (see 5.1 and 5.2).
(d) When consolidation packaging is required (see 5.1.1.1).
(e) When boxes shall be other than PPP-B-636, domestic type for level B (see 5.2.2).
(f) When marking in accordance with MIL-STD-129 is required (see 5.3).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of paragraph 7-104.55 of the DAR. The first article should be a first production item consisting of one complete card-label holder or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The contracting officer should include specific instructions in all acquisition instruments, regarding arrangement for examinations, tests, and approval of the first article.

6.4 Specifications and standards applicable to military (levels A and B preparation for delivery requirements. In addition to the documents listed in 2.1, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification for military procurements where level A or B packaging are specified.

Federal Specifications:

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-636 - Boxes, Shipping, Fiberboard.

Military Standards:

MIL-STD-129 - Marking for Shipment and Storage.

MILITARY CUSTODIANS:

Navy - YD
Air Force - 99

User activities;

Army - GL
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
JUSTICE - FPI

Preparing activity:

Navy - YD

Project No. 9905-0235

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

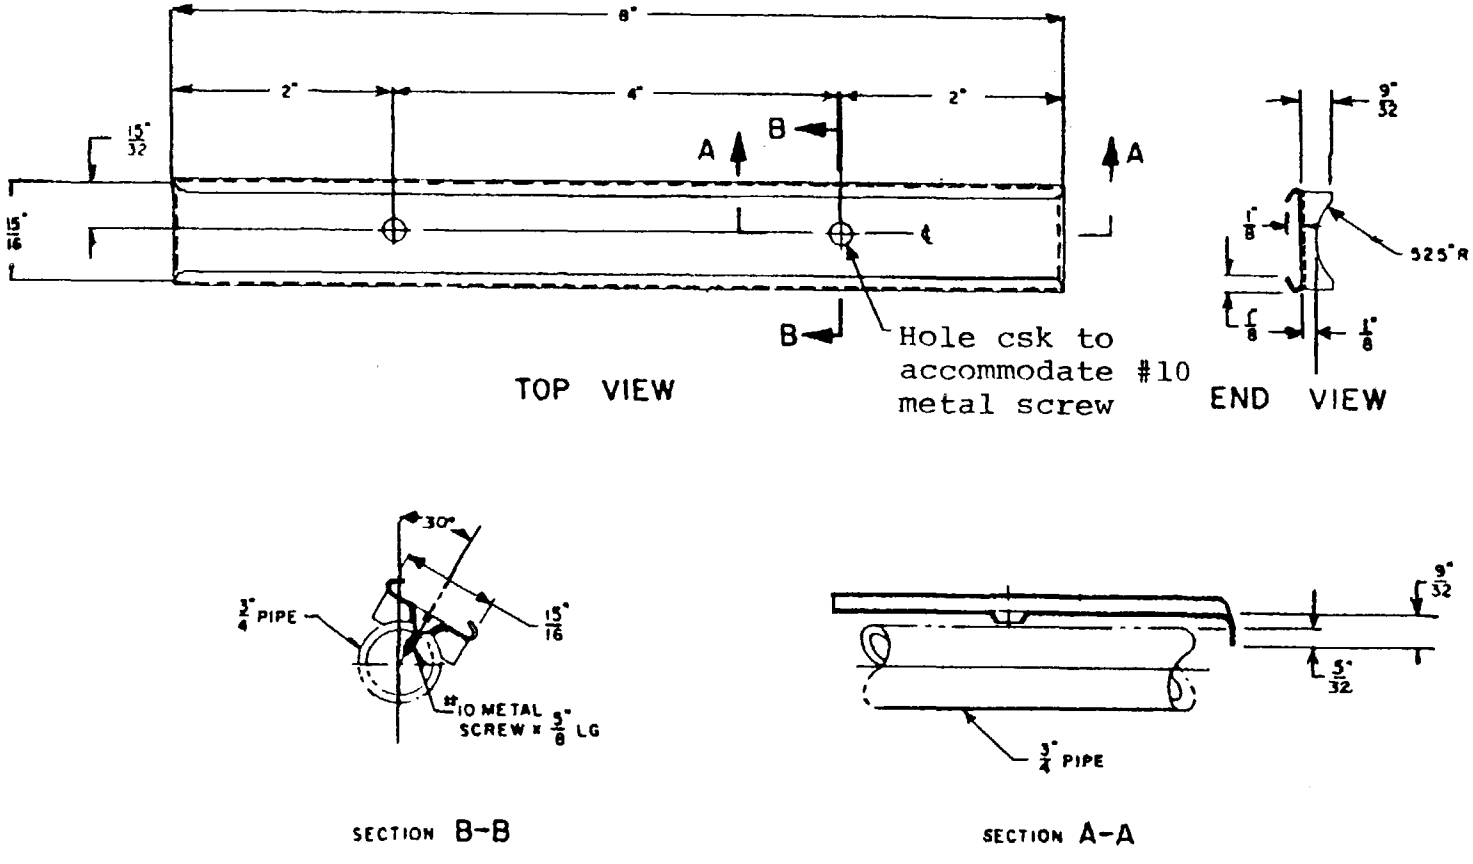


FIGURE 1. Card label holder for post office mailbag rack

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.