RR-S-617D
February 6, 1974
SUPERSEDING
Fed. Spec. RR-S-617C
September 10, 1970

FEDERAL SPECIFICATION

SPOONS, FOOD SERVICE, (BASTING, STRAINING, AND MIXING)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers food service spoons.

1.2 Classification. Spoons shall be of the following types as specified (see 6.2):

Type I - Basting.
Type II - Straining.
Type III - Mixing.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-665 - Boxes: Paperboard, Metal Edged and Components.
PPP-B-676 - Boxes, Set-Up.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated

FSC 7340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Ft. Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-P-17667 - Paper, Wrapping, Chemically Neutral.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

American Society for Testing and Materials (ASTM) Standards:

A167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

A176 - Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.2 and 6.3).

3.2 Standard product. The spoons delivered under this specification shall be the manufacturer's commercially current standard product except for any changes necessary to comply with specification requirements.

3.3 Materials. Materials shall be as specified herein (and on figure 1). Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial spoons provided the completed item complies with all provisions of this specification.

3.3.1 Stainless steel. Stainless steel sheet shall conform to type 302 or 304 of ASTM A167 or type 430 of ASTM A176.

3.4 Construction. The spoons shall be constructed of one piece of material as specified in 3.3.1 and shall conform to the requirements specified herein and as shown on figure 1.

3.4.1 Basting spoon, (type I). The basting spoon shall be furnished with an unperforated bowl.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.4.2 Straining spoon, (type II). The straining spoon shall be furnished with a bowl having not less than 19 and not more than 24 holes.

3.4.3 Mixing spoon, (type III). The mixing spoon shall be furnished with a bowl having not less than 6 and not more than 8 slots, symmetrically spaced.

3.5 Marking. The spoon handles shall be permanently marked with the manufacturer's name or trademark of such known characters as to be readily identifiable with the manufacturer. The surface opposite the markings shall show no signs of penetration or unevenness, nor shall the marking cause distortion of any part of the handle.

3.6 Finish. All surfaces of the spoons shall be cleaned and polished to a No. 2B or better finish.

3.7 Workmanship. All outside edges of the spoons shall be rounded. Holes and slots in the spoons shall be cleanly punched. Spoons shall be free from dirt and other harmful extraneous material, burrs, slivers, rough or sharp edges, rough die, tool and grind marks, dents and cracks.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. When a first article is required, the spoons shall be examined as specified in 4.3.2.1 and 4.3.2.2. The presence of any defects shall be cause for rejection of the first article.

4.3 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, figures, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.3.2 End item inspection. The inspection lot shall consist of all spoons of one type offered for inspection at one time. The sample unit shall be one completely fabricated spoon.

4.3.2.1 Visual examination. The spoons shall be examined for the defects listed in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0 for major defects and 10.0 for total defects expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not as specified	X	
	Not smooth	X	
	Not cleaned or polished	X	
	Not No. 2B or better finish	X	
Construction and workmanship	Not one piece	X	
	Wrong type	X	
	Fracture, crack, or break in surface	X	
	Bent, deformed, or dented, affecting serviceability	X	
	Dented or marred not affecting serviceability		X
	Edges with sharp burrs or fins which might cause injury	X	
	Outside edges not rounded	X	
	Any unspecified hole or perforation	X	
	Pierced holes or slots not clean and uniform (irregular)		X
	More or less than required number of pierced holes or slots		X
	Rough die, tool or grind marks	X	
Marking for identification	Missing, incomplete, incorrect, illegible		X
	Distortion, deformation, or penetration of surface from marking	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.3.2.2 Dimensional examination. The spoons shall be examined for compliance with dimensions specified. Any noncompliance shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 expressed in defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling. Bulged or distorted container.
Contents, interior and exterior	Number per container is more or less than required.

4.3.4 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be scored as specified in table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE III. Examination of palletization

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Twelve spoons of one type only shall be nested and completely wrapped in minimum 15 pound basis weight paper conforming to type I of MIL-P-17667 and packaged in a snug fitting folding or setup paperboard box or fiberboard box conforming to variety 1, style III, type G, class i of PPP-B-566; or type I, variety 1, class A, style 4 of PPP-B-676; or style optional, type CF, variety SW or type SF, class domestic of PPP-B-636, respectively. Each box shall be securely closed in accordance with the appendix of the applicable box specification.

5.1.2 Level B (civil agencies). Twelve spoons of one type only, each wrapped or slip-sheeted in a paper of the type normally used for the item, shall be packaged in a snug fitting paperboard or fiberboard box conforming to PPP-B-566, PPP-B-665, PPP-B-676, or PPP-B-636. Closure shall be in accordance with the applicable box specification.

5.1.3 Level C. The spoons shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Ninety-six spoons of one type only, packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Ninety-six spoons of one type only, packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Box closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Spoons, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization (Military requirements). Unless otherwise specified (see 6.2), spoons packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with **Fed. Std. No. 123.**

5.4.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The spoons covered by this specification are intended for use in the preparation and serving of food.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents, as applicable:

(a) Title, number, and date of this specification.
(b) Type of spoon required (see 1.2.1).
(c) First article, (see 3.1, 4.2, and 6.3).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(f) When palletization is not required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Contract data requirements. Any data items to be delivered under any contract for items covered by this specification should be specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

MILITARY INTEREST:

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC, YD, MS
Air Force - 45

User activity:

Navy - CG

Preparing activity:


Army - GL

Civil Agency Coordinating Activities:

GSA-FSS
VA-DMS


Project No. 7340-0059


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

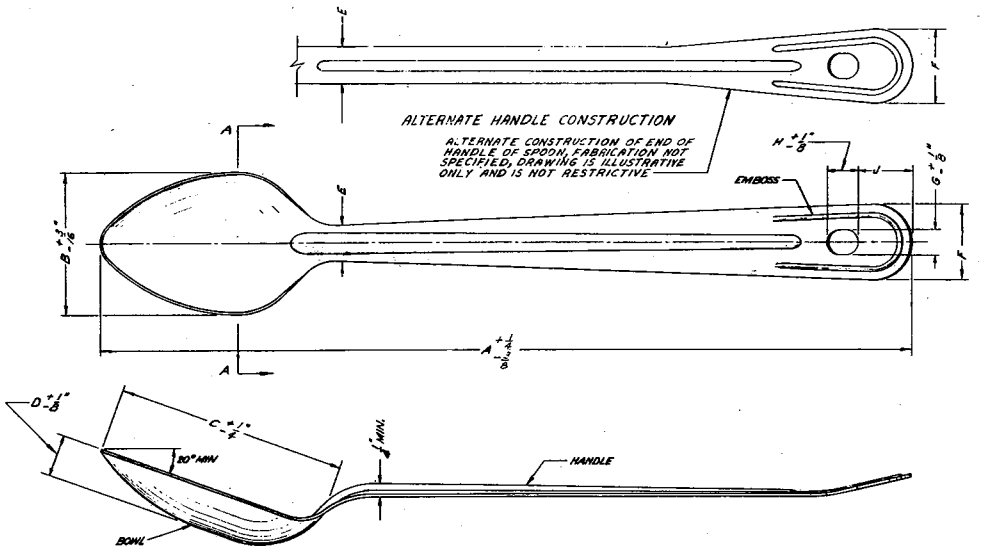

SPOON, BASTING, TYPE-I

STEEL, STAINLESS

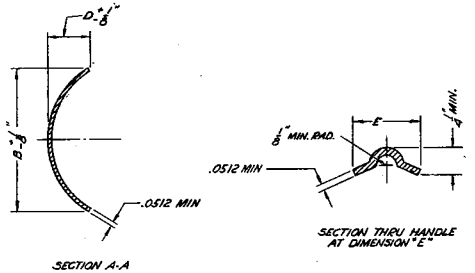

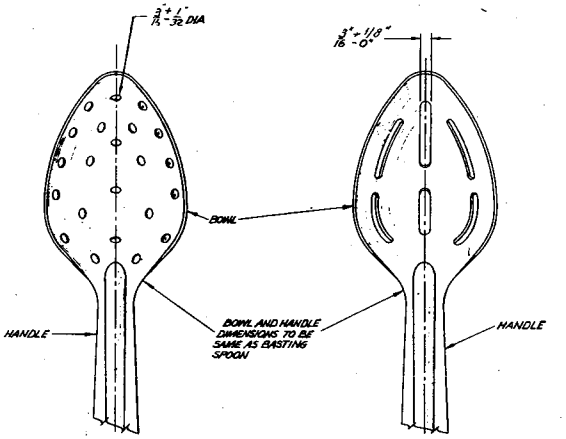

SPOON, STRAINING, TYPE-II

STEEL, STAINLESS

SPOON, MIXING, TYPE-III

STEEL, STAINLESS

SIZE	A	B	C	D	E	F	G	H	J
INCHES LONG	INCH	INCH	INCH	INCH	INCH	INCH	INCH	INCH	INCH
15	15 1/8	2 5/8	4	3/4	6/8	1 3/8	7/16	9/16	1

UNLESS OTHERWISE STATED, FABRICATING TOLERANCES ARE: DECIMALS ±.005; WHOLE NUMBERS AND FRACTIONS ± 1/16; DEGREES ±1°

FIGURE 1. Spoon, Food Service, (Basting, Straining, and Mixing)

Orders for this publication are to be placed with General Services Administration, acting for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.