
MILITARY SPECIFICATION SHEET

CABLE, ELECTRICAL, 600 VOLTS, LIGHTWEIGHT, TWO CONDUCTOR, POWER, TYPE DX (INCLUDING VARIATION TYPE DXA)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cable described herein shall consist of this document and the latest issue of MIL-C-24640.

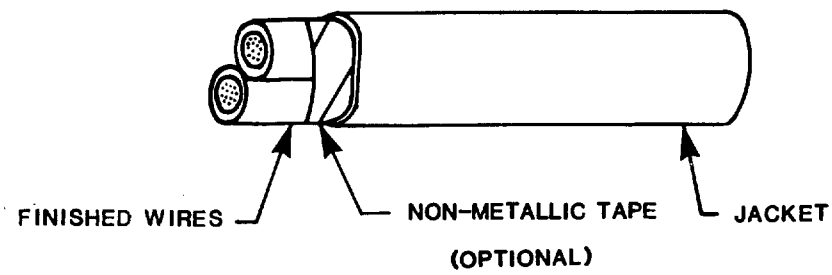

SH 12748

FINISHED WIRE: MIL-W-81044/12 except identification codes and methods shall be in accordance with MIL-C-24640.

FIGURE 1. Construction (non-watertight).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:40Z
Check the source to verify that this is the current version before use.

TABLE I. Construction details - unarmored.

Type number	AWG size	Conductor diameter (inch) (nominal)	Finished wire diameter (inch) (min)	Finished wire diameter (inch) (max)	Jacket thickness (inch) (minimum)	Cable diameter (inch) (min)	Cable diameter (inch) (max)	Cable weight (pounds per 1000 feet) (max)	Conductor resistance per 1000 feet (ohms)	Insulation resistance per 1000 feet (megohms) (minimum)	Voltage withstand (volts) (minimum)
DX-3	16	0.055	0.069	0.075	0.031	0.223	0.241	39.4	4.90	5000	2000
DX-4	14	.069	.085	.093	.034	.266	.286	56.8	3.12	5000	2000

TABLE II. Construction details - armored.

Type number	AWG size	Conductor diameter (inch) (nominal)	Finished wire diameter (inch) (min)	Finished wire diameter (inch) (max)	Jacket thickness (inch) (minimum)	Cable diameter (inch) (min)	Cable diameter (inch) (max)	Cable weight (pounds per 1000 feet) (max)	Conductor resistance per 1000 feet (ohms)	Insulation resistance per 1000 feet (megohms) (minimum)	Voltage withstand (volts) (minimum)
DXA-3	16	0.055	0.069	0.075	0.031	0.273	0.291	54.4	4.90	5000	2000
DXA-4	14	.069	.085	.093	.034	.316	.336	73.8	3.12	5000	2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Qualification required.
Construction details: See tables I and II.

When this cable is manufactured with armor, the following additional requirements shall apply:

(a) Braided metal armor and paint shall be added.
(b) Cable surface marking will not be required.

EXAMINATION AND TESTS:

	Requirements
Basic electrical:	
Conductor resistance - ohms/1000 feet, at 25°C, maximum	See tables I and II
Voltage withstand - volts, root mean square, minimum	
Conductor to conductor	2500
Conductor to shield	Not applicable
Shield to shield	Not applicable
Insulation resistance - megohms/1000 feet, minimum	5000
Conductor and shield continuity	Not applicable
Jacket flaws	Not applicable
Group A:	
Visual and dimensional	No failure
Capacitance:	
Mutual capacitance - at 1 MHz, picofarads/foot (pF/ft), maximum	Not applicable
Capacitance unbalance - percent, maximum	Not applicable
Characteristic impedance - at 1 MHz, ohms	Not applicable
Watertightness (see table XI of MIL-C-24640 for limits of water leakage)	Not applicable
Weight	No failure
Group B:	
Cold bending	No failure
Drip	Zero
Tear - pounds per inch thickness, minimum	35
Physicals (unaged)	
Jacket	
Tensile strength - lb/in^2, minimum	1300
Elongation - percent, minimum	160
Attenuation - at 3 MHz, dB/100 feet, maximum	Not applicable
Gas flame (1 hour)	Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:40Z
Check the source to verify that this is the current version before use.

EXAMINATION AND TESTS: (Continued)

	Requirements
Group C:	
Physicals (aged)	
Jacket	
Air oven	
Tensile strength - percent of unaged, minimum	60
Elongation - percent of unaged, minimum	60
Hot oil immersion	
Tensile strength - lb/in^2, minimum	50
Elongation - percent, minimum	50
Permanence of printing (conductor) - cycles, minimum	50
Permanence of printing (jacket) - cycles, minimum	250
Armor (type DXA only) - conformance to material, construction and coverage	No failure
Shield - conformance to material, construction and coverage	Not applicable
Heat distortion - percent unaged, maximum	30
Cable filler removability	No failure
Shrinkage	No failure
Mutual inductance - dB/1000 feet, maximum	Not applicable
Surface transfer impedance	
Milliohms per meter, maximum	Not applicable
EMP response, dB, minimum	Not applicable
Pulse response time - ms/500 feet	
Rise time, maximum	Not applicable
Decay time, maximum	Not applicable

QUALIFICATION INSPECTION:

Qualification inspection shall include basic electrical, all of groups A, B and C, plus the following:

Aging and compatibility (cable)	No failure
Acid gas equivalent - percent, maximum	
Jacket	2
Fillers	2
Insulation	18
Halogen content - percent, maximum	
Jacket	0.2
Fillers	0.2
Flame propagation	No failure
Immersion	
Tensile strength - percent of unaged, minimum	50
Elongation - percent of unaged, minimum	50
Smoke index, maximum	
Jacket	25
Fillers	--
Insulation	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:40Z
Check the source to verify that this is the current version before use.

QUALIFICATION INSPECTION: (Continued)

	Requirements
Toxicity index, maximum	
Jacket	5
Fillers	5
Insulation	1.5
Durometer - (type A) hardness, minimum	80
Weathering	No failure
Fungus resistance	No failure
Abrasion resistance	No failure
Gas flame (3 hour)	Not applicable
Finished wire	Not applicable

Custodians:
Army - MI
Navy - SH
Air Force - 85

Review activities:
Navy - EC
Air Force - 99
DLA - IS

User activities:
Army - ME, AR
Navy - CG

Preparing activity:
Navy - SH
(Project 6145-0903-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:40Z
Check the source to verify that this is the current version before use.