COMMERCIAL ITEM DESCRIPTION


WRENCH, BOX, STUB END TYPE, OFFSET HANDLE

The General Service Administration has authorized the use of this commercial item in lieu of Federal Specification GGG-W-636.

This commercial item description covers wrenches suitable for heavy duty nut turning on hexagon nuts assigned National Stock Numbers (NSN) as listed in Table I.

Salient Characteristics:

Material:	Steel, Rockwell C hardness of 40 minimum, 55 maximum.
Finish:	Chromium plated, enamel, oxide, phosphate or zinc coating.
Marking:	Marked in a plain and permanent manner with wrench opening size on the faces or on the handle as close to the head as practicable and with manufacturer's name or trademark.
Wrench opening:	Sized to pass the gaging requirements of Federal Standard 346.
Chamfer:	Chamfered on both sides on all points to provide a lead for the working surface.
Box opening:	12-point.
Handle:	Stud end round and suitable for accepting applicable handle extension. Provided with a plunger stop to prevent handle extension from turning or slipping under normal working conditions.
Dimensions:	See table I.

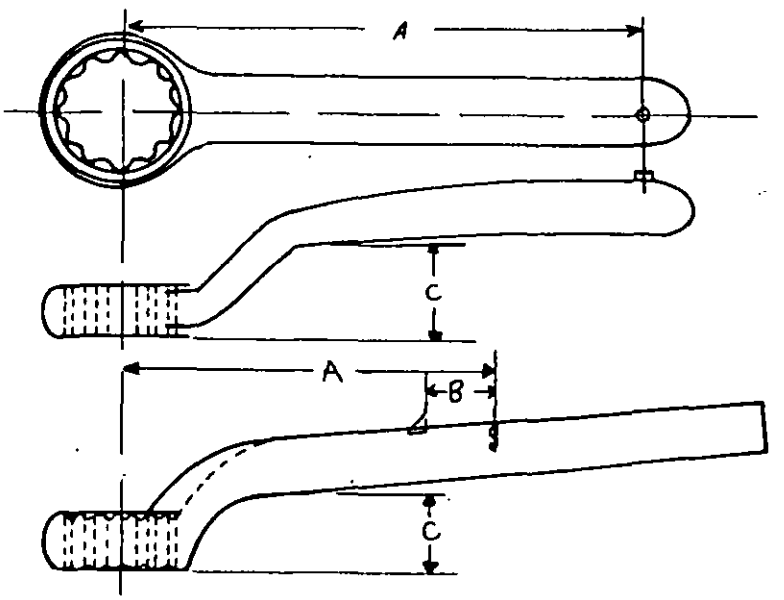

WRENCH, BOX

Workmanship. Wrench shall be free from rust, burrs, fins, nodules, and other defects which may impair serviceability, durability, or appearance. The edges and corners of the wrench shall be clearly defined and smoothly finished with no evidence of broaching tears on the working surface.

The issue of Federal Standard 346 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. Each wrench shall be preserved and packaged in accordance with normal commercial practice that will assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Federal Standards are available from General Services Administration, Specification Sales, Building 197, (Washington Navy Yard), Washington, DC 20407.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

National Stock Number	Wrench openings (distance across flats)	Outside Diameter of head	Thickness of head	Wrench opening to plunger (centerline to centerline)		Centerline of plunger to stop (stop optional	Height of offset	Diameter of handle	Overall length	Test load
		Maximum	Maximum	A		B± 1/32	C-minimum	+0.000 -0.062	Minimum	Min.
				Min.	Max.					
	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	In.-lbs
5120-00-541-1297	1-1/16	1-43/64	3/4	4-15/16	6-13/16	1-1/4	15/16	7/8	7-13/16	6,500
5120-00-288-9677	1-1/8	1-3/4	3/4	4-15/16	7-1/8	1-1/4	1	7/8	7-7/8	7,000
5120-00-288-9678	1-1/4	1-15/16	7/8	4-15/16	7-11/16	1-1/4	1-1/16	7/8	7-15/16	7,250
5120-00-541-1298	1-5/16	2	7/8	6-7/16	8	1-1/4	1-1/8	7/8	9-15/16	8,000
5120-00-541-1299	1-3/8	2-3/32	7/8	6-7/16	8	1-1/4	1-3/16	7/8	9-15/16	9,000
5120-00-541-1300	1-7/16	2-7/32	15/16	6-7/16	8-3/8	1-1/4	1-1/4	7/8	10-3/8	9,550
5120-00-293-0672	1-1/2	2-5/16	15/16	6-7/16	9	1-1/4	1-5/16	7/8	10-5/8	10,450
5120-00-541-1301	1-9/16	2-11/32	15/16	6-7/16	9-1/16	1-1/4	1-5/16	7/8	10-5/8	11,550
5120-00-449-8094	1-5/8	2-1/2	1	6-7/16	9-1/8	1-1/4	1-3/8	1	10-11/16	11,750
5120-00-541-1302	1-11/16	2-5/8	1-1/16	6-15/16	9-9/16	1-1/4	1-7/16	1	11-13/16	14,000
5120-00-287-4171	1-3/4	2-11/16	1-1/16	6-15/16	9-9/16	1-1/4	1-1/2	1	11-13/16	18,000
5120-00-277-7582	1-13/16	2-3/4	1-5/32	6-15/16	10-1/8	1-1/4	1-9/16	1	12-3/16	19,000
5120-00-287-4168	1-7/8	2-13/16	1-1/8	6-15/16	10-3/16	1-1/4	1-5/8	1	12-1/2	21,800
5120-00-287-4170	2	3	1-1/4	6-15/16	10-5/16	1-1/4	1-3/4	1	12-3/4	29,000
5120-00-287-4169	2-3/16	3-7/32	1-5/16	6-15/16	10-5/16	1-1/4	1-7/8	1	12-13/16	29,000
5120-00-357-8334	2-1/4	3-3/8	1-11/32	6-15/16	10-7/16	1-1/4	1-7/8	1	13	29,000
5120-00-287-4167	2-3/8	3-7/8	1-3/8	10-7/16	11-9/16	5-1/4	2	1-1/8	13-3/8	32,000
5120-00-287-4164	2-9/16	4-3/16	1-9/16	10-7/16	11-9/16	5-1/4	2-1/4	1-1/8	13-3/4	35,000
5120-00-287-4165	2-5/8	4-3/16	1-9/16	10-7/16	11-9/16	5-1/4	2-1/4	1-1/8	13-9/16	35,000
5120-00-293-0674	2-3/4	4-1/2	1-11/16	9-11/16	11-9/16	5-1/4	2-3/8	1-1/8	12-15/16	40,000
5120-00-264-5217	2-15/16	4-9/16	1-3/4	9-11/16	11-9/16	5-1/4	2-3/8	1-1/8	13-1/8	45,000
5120-00-287-4172	3-1/8	4-7/8	1-3/4	9-11/16	11-9/16	5-1/4	2-3/8	1-1/8	13-1/8	48,000

TABLE I

GSA FSC 51005394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.