A-A-1956
June 15, 1982

COMMERCIAL ITEM DESCRIPTION

LADLE, KITCHEN (STAINLESS STEEL)

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification RR-L-30, Sizes a, b, c, d, e, and h.

The ladles, covered by this specification are intended for use in kitchens for serving or transferring food between containers, shall be of the following sizes, as specified:

Size 1 - 2 ounce (.059 liter) capacity
Size 2 - 4 ounce (.118 liter) capacity
Size 3 - 8 ounce (.236 liter) capacity
Size 4 - 12 ounce (.355 liter) capacity
Size 5 - 72 ounce (2.129 liter) capacity

Salient characteristics:

Design and construction. The ladles, consisting of a body and a handle, shall conform to the dimensions shown in figure 1 and on table II.

Body. The ladle body shall be formed without seems from a single piece of stainless steel.

Handle. The handle shall be fabricated of stainless steel. The handle shall be spot or fillet welded to the body. When the body and handle are secured by fillet welding, the welding rod shall have the same chemical composition as the welded material. When the handle is spot welded to the body, a minimum of three spot welds shall be used and the joint sealed all around with solder.

Finish. Ladles shall be given a No. 3, or smoother, commercial finish on all surfaces.

Weld test. The body of the ladle shall be securely clamped so that the handle is in a horizontal position. The weight for each size ladle specified in table I below, shall be suspended 1-1/2 inches from the curved end of the handle for not less than 5 minutes to determine compliance with weld strength requirements. The weld shall be such that a weighted handle shall not separate from the body.

TABLE I. Weight for weld test

Ladle Size	Weight (pounds)
1	3
2, 3, and 4	5
5	8

TABLE II. Dimensions

	A	B ± 1/8	C ± 1/8	D ± 1/8	Minimum Thickness E Body	Minimum Thickness F Handle
Size 1	12 ± 1/2	1	5/8	1/2	.0312	.0781
Size 2	12 ± 1/2	1-1/8	5/8	1/2	.0312	.0781
Size 3	15 ± 3/4	1-1/8	5/8	5/8	.0312	.0781
Size 4	15-1/2 ± 3/4	1-1/8	5/8	5/8	.0500	.1094
Size 5	20 ± 1	1-1/8	7/8	1	.0500	.1094

Configuration. See figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:18Z
Check the source to verify that this is the current version before use.

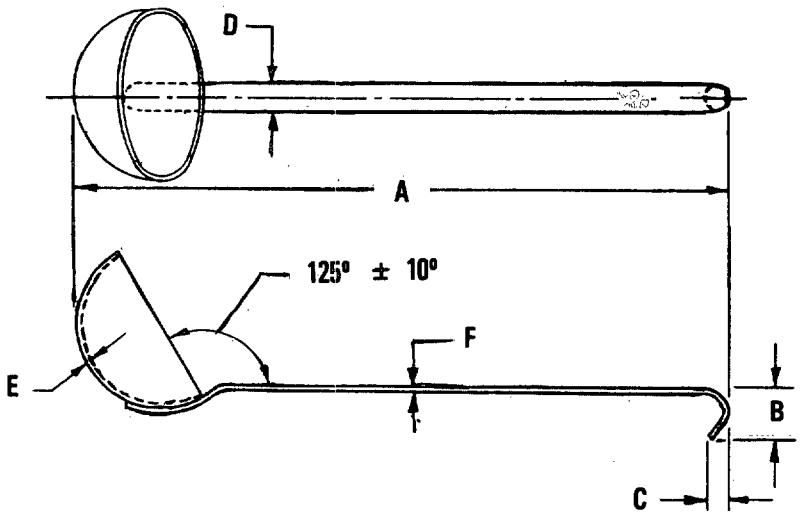


Figure 1

Conformance. The ladles shall comply with National Sanitation Foundation (NSF) Standard No. 2.

Workmanship. The finished ladles shall be clean and shall not contain any burrs, slivers, sharp edges, or rough die, tool, gouge, or grind marks. The finished ladles shall not be fractured, buckled, dented, punctured, or otherwise malformed or damaged. Soldered joints shall be a smooth as the metals joined, free of pinholes, cracks, flux deposits or irregularities. There shall be no defects which shall impair serviceability, appearance, or durability.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

NSF Standard No. 2 is available from the National Sanitation Foundation, NSF Building, An Arbor, MI 48105.

MILITARY INTERESTS:

Military Coordinating Activity

Army GL

Custodians

Navy - SA
Air Force - 99

Review Activities

Army - MD
Navy - MC
Air Force - 45

User Activities

Navy - MS, CG

CIVIL AGENCY COORDINATING ACTIVITY:

VA DMS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.