INCH-POUND

MIL-F-81836/8(AS)
27 MARCH 1992

# MILITARY SPECIFICATION SHEET

## FILTER, FLUID, PRESSURE, HYDRAULIC, 8000 PSI, 3 MICRON ABSOLUTE, STYLE C, GUAGE INDICATOR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-81836(AS)


Notes:

1. Material: See procurement specification.
2. Dimensions in inches unless otherwise specified. Tolerances: Decimals ±.010, angles ±1°.
3. Direction of flow and port markings shall be clearly and permanently marked on each side.
4. Filter includes filter element M81836/9.
5. W diameter may be broken by inlet port provided unbroken solid shoulder extends for at least 270° of circumference.
6. Machined surfaces, "M" dia and 30° lead-in in Detail U shall be smooth to 32 microinches $R_a$ per ANSI/ASME B46.1 unless otherwise specified.


AMSC N/A FSC 4920

DISTRIBUTION STATEMENT A. Approved for public release; distirbution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

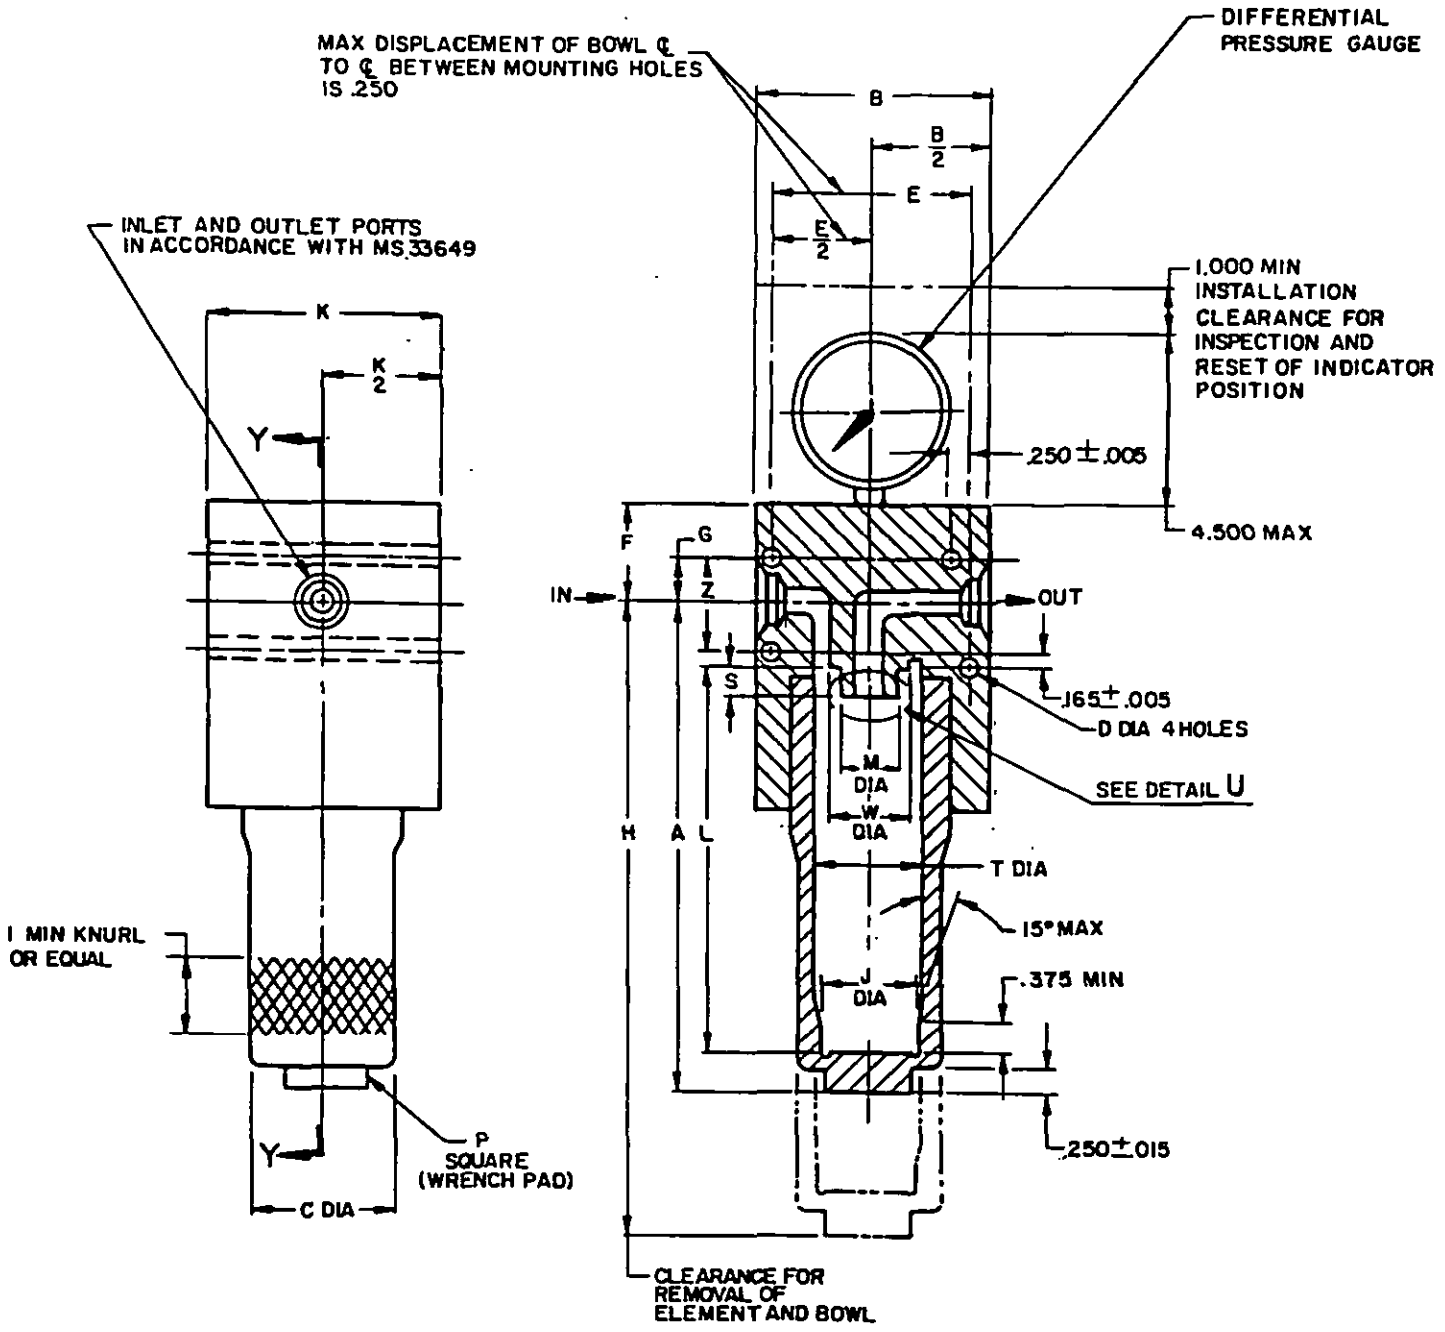


SECTION Y Y

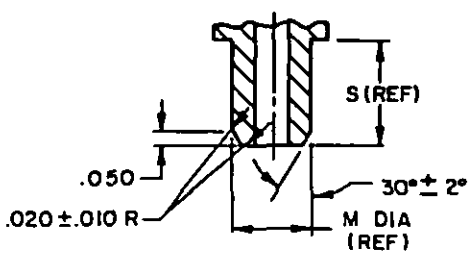


DETAIL U
FOR -16 AND -24
ENLARGED

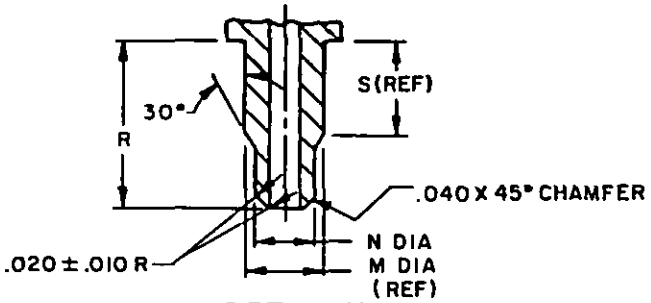


DETAIL U
FOR -8
ENLARGED



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional data.

| ASSEMBLY PART NUMBER | PORT SIZE | FLOW RATE (gpm) | A MAX | B ±.030 | C DIA MAX | D DIA ±.005 | E | |
|---|---|---|---|---|---|---|---|---|
| M81836/8-8 | -08 | 6 | 7.600 | 4.000 | 2.562 | .281 | 3.125 | ±.005 |
| M81836/8-16 | -16 | 30 | 16.062 | 5.000 | 4.530 | .406 | 4.375 | ----- |
| M81836/8-24 | -24 | 60 | 21.625 | 6.000 | 5.780 | .531 | 5.125 | ----- |

| ASSEMBLY PART NUMBER | F MAX | G | | H MAX | J DIA ±.005 | K | L ±.030 | M DIA +.000 -.002 | N DIA | P +.000 -.015 |
|---|---|---|---|---|---|---|---|---|---|---|
| M81836/8-8 | 1.250 | 1.000 | ±.005 | 10.875 | 1.931 | 3.000 | 5.785 | 1.062 | .875 | 1.125 |
| M81836/8-16 | 2.125 | 1.375 | ----- | 29.375 | 2.682 | 5.000 | 13.000 | 1.248 | ---- | 1.375 |
| M81836/8-24 | 2.625 | 1.812 | ----- | 38.188 | 3.702 | 6.000 | 16.100 | 1.625 | ---- | 1.625 |

| ASSEMBLY PART NUMBER | R | S | T DIA | W DIA MIN | Z ±.005 |
|---|---|---|---|---|---|
| M81836/8-8 | .812 | .438 | 2.065 | 1.344 | 1.750 |
| M81836/8-16 | ---- | .600 | 2.834 | 1.594 | 3.312 |
| M81836/8-24 | ---- | .600 | 3.900 | 2.000 | 4.250 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

Preparing Activity:
Navy-AS

(Project 4920-N469)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.