INCH-POUND

MIL-PRF-81836/2B
1 October 1998
SUPERSEDING
MIL-F-81836/2A(AS)
27 March 1992

PERFORMANCE SPECIFICATION SHEET

FILTER, FLUID PRESSURE, HYDRAULIC, 5,000 PSI 3 MICRON ABSOLUTE, TYPE B, ELECTRICAL INDICATOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81836.

REQUIREMENTS:

Envelope: See figure 1.

Finish: Unless otherwise specified on the drawing, the "M" diameter, 30^{o} lead-in, and machined surfaces shall be smooth to 32 micro inches R_a measured per ASME-B46.1

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

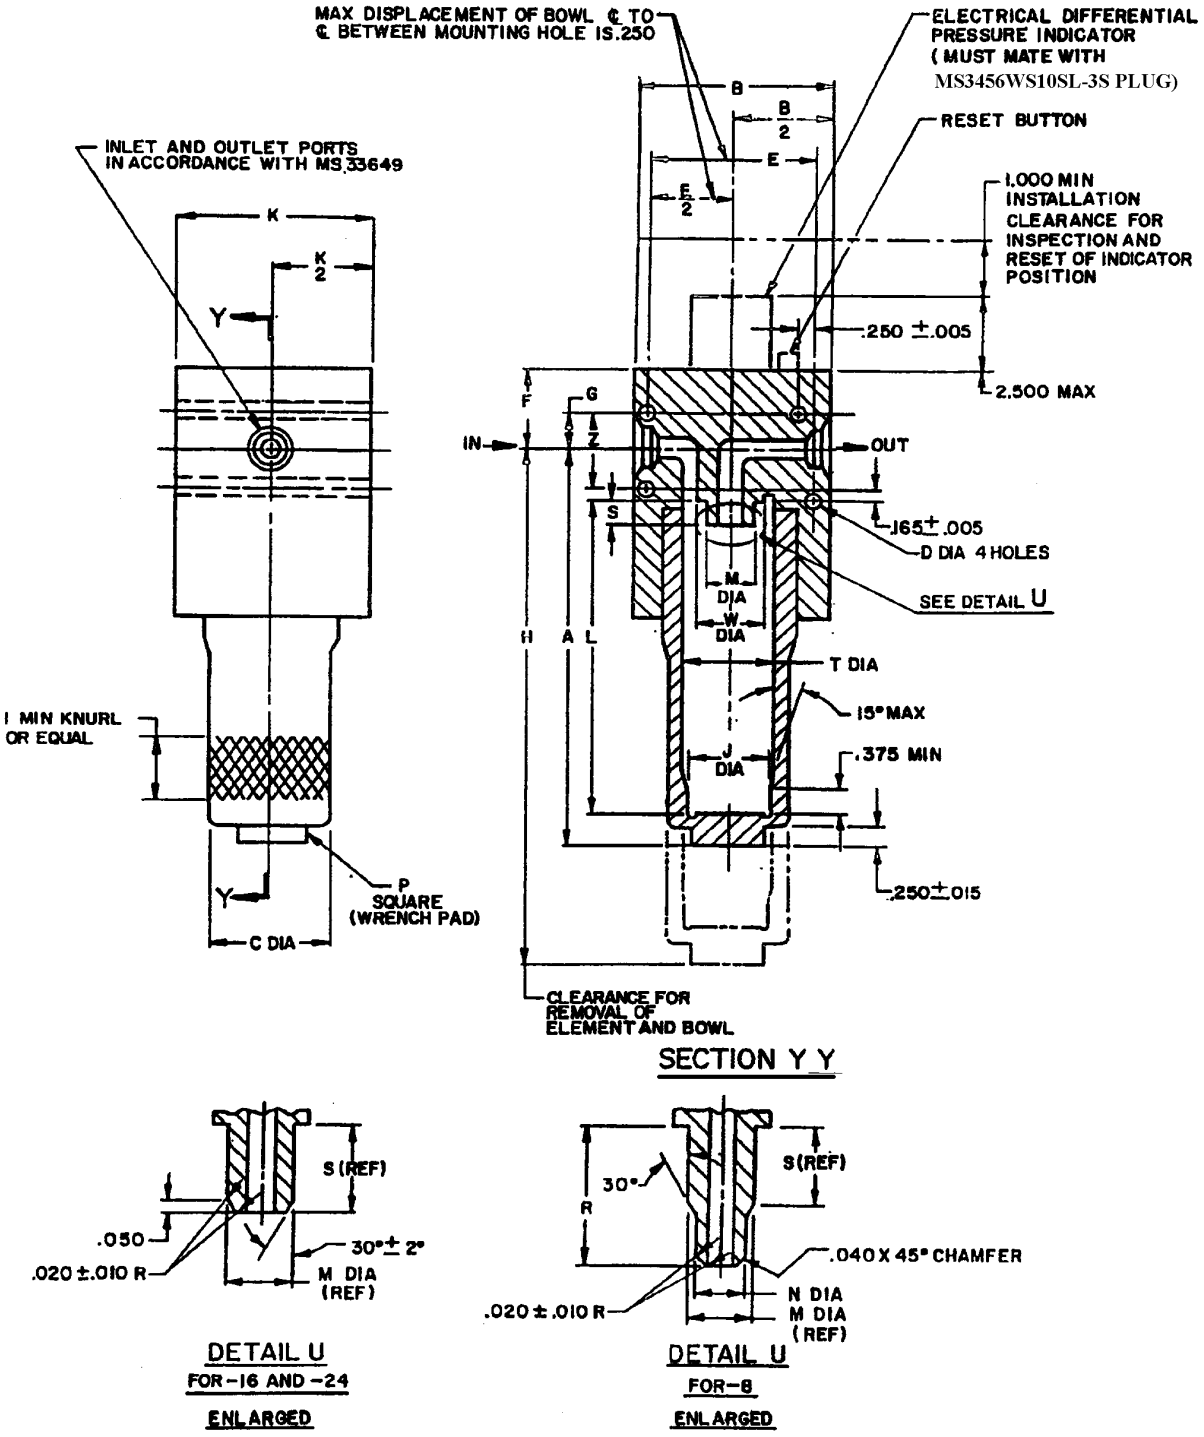

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches, tolerances: decimals $\pm$ .010, angles $\pm$ 1^{o}.
2. Remove all burrs and break sharp edges to 0.005 inch minimum.
3. Drawing symbols per MIL-STD-100.
4. Direction of flow and port markings shall be clearly and permanently marked on each side of filter housing.
5. Filter includes filter element M81836/4.
6. W diameter may be broken by inlet port provided unbroken solid shoulder extends for at least 270^{o} of clearance.
7. Additional dimensional data is listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional data.

ASSEMBLY PART NUMBER	PORT SIZE	FLOW RATE (gpm)	A MAX	B ±.030	C DIA MAX	D DIA ±.005	E	
M81836/2-8	-08	6	7.600	4.000	2.562	.281	3.125	±.005
M81836/2-16	-16	30	16.062	5.000	4.530	.406	4.375	------
M81836/2-24	-24	60	21.625	6.000	5.780	.531	5.125	------

ASSEMBLY PART NUMBER	F MAX	G		H MAX	J DIA ±.005	K	L ±.030	M DIA +.000 -.002
M81836/2-8	1.250	1.000	±.005	10.875	1.961	3.000	5.785	1.062
M81836/2-16	2.125	1.375	------	29.375	2.712	5.000	13.000	1.248
M81836/2-24	2.625	1.812	------	38.188	3.732	6.000	16.100	1.625

ASSEMBLY PART NUMBER	N DIA	P +.000 -.015	R	S	T DIA	W DIA MIN	Z	
M81836/2-8	.875	1.125	.812	.438	2.065	1.344	2.000	±.005
M81836/2-16	------	1.375	------	.600	2.834	1.594	3.562	----
M81836/2-24	------	1.625	------	.600	3.900	2.000	4.500	----

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Navy - AS
DLA - CC

Preparing activity:
Navy - AS
(Project 4920-0923-002)

Review activities:
Navy - MC, SA, SH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.