INCH-POUND

MIL-PRF-81836/5B
1 October 1998
SUPERSEDING
MIL-F-81836/5A(AS)
27 March 1992

PERFORMANCE SPECIFICATION SHEET

FILTER ELEMENT, ADAPTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81836.

REQUIREMENTS:

Envelope: See figure 1.

Finish: Unless otherwise specified on the drawing, surface roughness shall be in accordance with SAE-AS4395.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

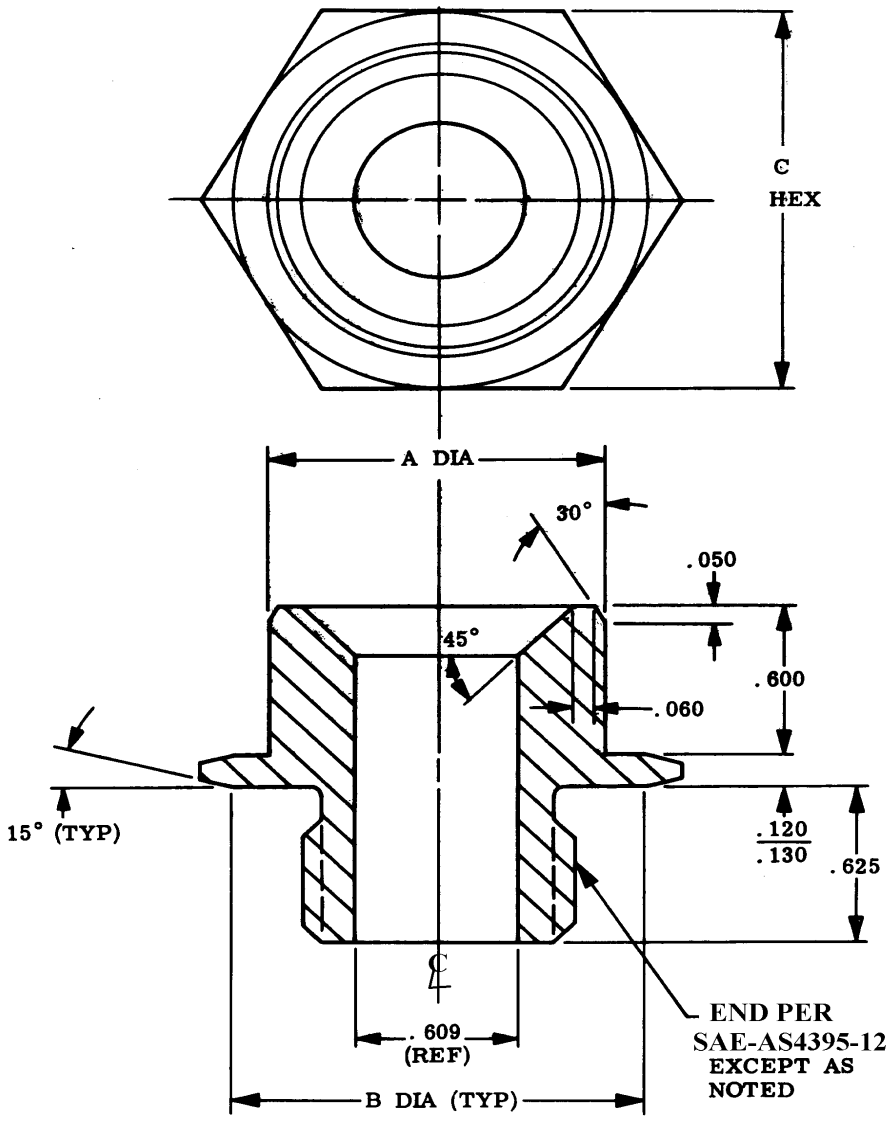

NOTES:

1. Dimensions are in inches, tolerances: decimals ± .010, angles ± 1°.
2. Remove all burrs and break sharp edges to 0.005 inch minimum.
3. Drawing symbols per MIL-STD-100.
4. The M81836/4-16 element and M81836/5-16 adapter shall be used with the Airforce MIL-F-27656 type filter housing.
5. Additional dimensional data is listed in table I.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional data.

Adapter part Number	Flow rate (gpm)	A Dia + .000, - .002	B Dia ± .015	C Hex ± .015
M81836/5-16	30	1.248	1.625	1.625

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Navy - AS
DLA - CC

Preparing activity:
Navy - AS
(Project 4920-0923-005)

Review activities:
Navy - MC, SA, SH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.