The documentation and process conversion measures necessary to comply with this document shall be completed by 7 January 2026.

INCH-POUND

MIL-PRF-19500/623F
w/AMENDMENT 1
7 October 2025
SUPERSEDING
MIL-PRF-19500/623F
10 July 2020

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, DARLINGTON, PNP SILICON,
HIGH-POWER, DEVICE TYPE 2N7371,
QUALITY LEVELS JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for PNP silicon, high-power Darlington transistor. Four levels of product assurance (JAN, JANTX, JANTXV, and JANS) are provided for each encapsulated device.

1.2 Package outlines. The device package outline is a three terminal flange mount header TO-254AA package in accordance with figure 1.

1.3 Maximum ratings. Unless otherwise specified, $T_C$ = +25 °C.

| Type | $P_T$ (1) $T_C$ = +25°C | $V_{CBO}$ | $V_{CEO}$ | $V_{EBO}$ | $I_B$ | $I_C$ | $T_J$ and $T_{STG}$ | $R_{\theta JC}$ (2) |
|---|---|---|---|---|---|---|---|---|
| | W | V dc | V dc | V dc | A dc | A dc | °C | °C/W |
| 2N7371 | 100 | -100 | -100 | -5.0 | -0.2 | -12 | -65 to +200 | 1.5 |

(1) See figure 2 for temperature-power derating curves.
(2) See figure 3, transient thermal impedance graph.

1.4 Primary electrical characteristics. Unless otherwise specified, $T_A$ = +25 °C.

| Limit | $h_{FE1}$ (1) $V_{CE}$ = -3.0 V dc $I_C$ = -6.0 A dc | $V_{BE(SAT)}$ (1) $I_C$ = -12.0 A dc $I_B$ = -120 mA dc | $V_{CE(SAT)}$ (1) $I_C$ = -12.0 A dc $I_B$ = -120 mA dc | $\|h_{fe}\|$ $V_{CE}$ = -3.0 V dc $I_C$ = -5.0 A dc f = 1 MHz |
|---|---|---|---|---|
| | | V dc | V dc | |
| Min | 1,000 | | | 10 |
| Max | 18,000 | -4.0 | -3.0 | 250 |


(1) Pulsed see 4.5.1.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
FSC 5961

* DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

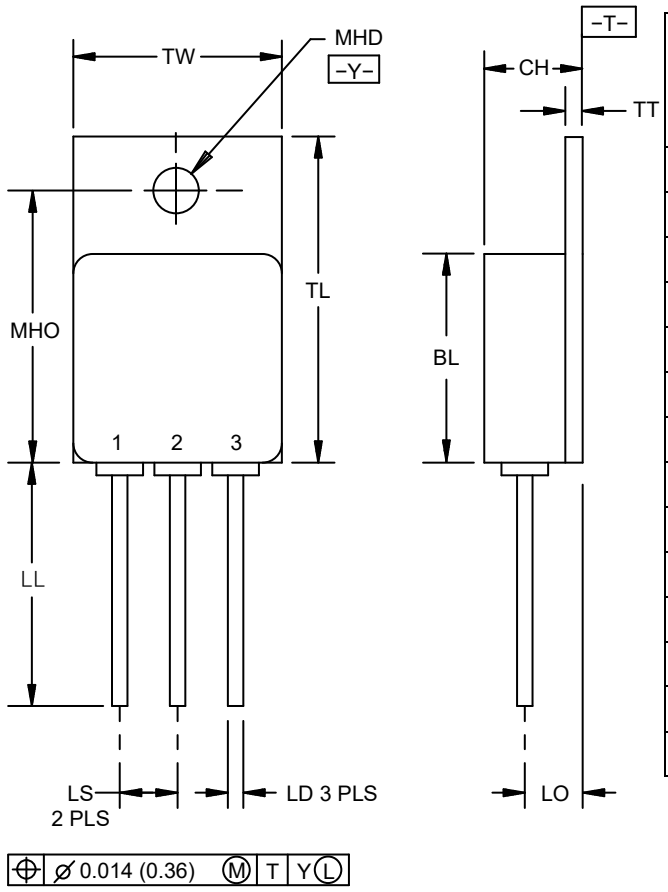


| Symbol | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| BL | .535 | .545 | 13.59 | 13.84 |
| CH | .249 | .260 | 6.32 | 6.60 |
| LD | .035 | .045 | 0.89 | 1.14 |
| LL | .510 | .570 | 12.94 | 14.48 |
| LO | .150 BSC | | 3.81 BSC | |
| LS | .150 BSC | | 3.81 BSC | |
| MHD | .139 | .149 | 3.53 | 3.78 |
| MHO | .665 | .685 | 16.89 | 17.40 |
| TL | .790 | .800 | 20.07 | 20.32 |
| TT | .040 | .050 | 1.02 | 1.27 |
| TW | .535 | .545 | 13.59 | 13.84 |
| Term 1 | Base | | | |
| Term 2 | Collector | | | |
| Term 3 | Emitter | | | |

* NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Protrusion of ceramic eyelets included in dimension LL.
3. All terminals are isolated from case.

FIGURE 1. Dimensions and configuration of three terminal flange mount header TO-254AA package.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", "JANTXV", and "JANS".

1.5.2 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".

1.5.2.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet are "7371".

1.5.3 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 or 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 or 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-STD-750, MIL-PRF-19500, and herein. Where a choice of lead finish or formation is desired, it shall be specified in the acquisition requirements (see 6.2).

3.4.2 Lead formation. Where a choice of lead formation is desired, it shall be specified in the acquisition document (see 6.2). When lead formation is performed, as a minimum, the vendor shall perform 100 percent hermetic seal in accordance with screen 14 of table E-IV of MIL-PRF-19500 and 100 percent dc testing in accordance with subgroup 2 of table I herein on all devices that had its leads altered.

3.4.3 Lead isolation. Methods used for electrical isolation of the terminal feed through shall employ materials that contain a minimum of 90 percent ceramic $AL_2O_3$ or equivalent. Examples of such construction techniques are metalized ceramic eyelets or ceramic walled packages.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.8 Workmanship. Devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II.).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

4.3 Screening (quality levels JANS, JANTX and JANTXV only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen | Measurements for JANS level | Measurements for JANTX and JANTXV levels |
|---|---|---|
| (1) 3c | Thermal impedance (see 4.3.2) | Thermal impedance (see 4.3.2) |
| 9 | $I_{CEX1}$ and $h_{FE1}$ | $I_{CEX1}$ and $h_{FE1}$ |
| 11 | Subgroup 2 of table I herein;<br>$I_{CEX1}$ and $h_{FE1}$;<br>$\Delta I_{CEX1}$ = 100 percent of initial value or -2 µA dc, whichever is greater.<br>$\Delta h_{FE1}$ = ±40 percent of initial value. | $I_{CEX1}$ and $h_{FE1}$ |
| 12 | See 4.3.1 | See 4.3.1 |
| 13 | Subgroups 2 and 3 of table I herein;<br>$I_{CEX1}$ and $h_{FE1}$;<br>$\Delta I_{CEX1}$ = 100 percent of initial value or -2 µA dc, whichever is greater.<br>$\Delta h_{FE1}$ = ±40 percent of initial value. | Subgroup 2 of table I herein;<br>$I_{CEX1}$ and $h_{FE1}$;<br>$\Delta I_{CEX1}$ = 100 percent of initial value or -2 µA dc, whichever is greater.<br>$\Delta h_{FE1}$ = ±40 percent of initial value. |

(1) Shall be performed anytime after temperature cycling, screen 3a. Quality levels JANTX and JANTXV levels do not need to be repeated in screening requirements.

4.3.1 Power burn-in conditions. Power burn-in conditions shall be as follows: $T_J$ = +175 °C min, $V_{CE}$ = -10 to -30 V dc, $T_A$ = +30 ±5 °C.

4.3.2 Thermal impedance ($Z_{\theta JX}$ measurements). The $Z_{\theta JX}$ measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, and $t_{MD}$ (and $V_C$ where appropriate). The $Z_{\theta JX}$ limit used in screen 3c shall comply with the thermal impedance graph on figure 3 (less than or equal to the curve value at the same $t_H$ time) and/or shall be less than the process determined statistical maximum limit as outlined in method 3131.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) and table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500, and herein.

4.4.2.1 Quality level JANS, table E-VIA of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B4 | 1037 | $V_{CB} \geq$ -10 V dc. |
| B5 | 2037 | Bond strength, test condition D. |
| B6 | 3131 | See 4.5.2. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

4.4.2.2 Quality levels JAN, JANTX and JANTXV, table E-VIB of MIL-PRF-19500.

| Subgroup | Method | Conditions |
|---|---|---|
| B3 | 1037 | $V_{CB}$ ≥ -10 V dc. |
| B5 | 3131 | See 4.5.2. |
| B6 | 1032 | $T_A$ = +200 °C. |

* 4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the test and conditions specified for subgroup testing in table E-VII of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 1056 | Test condition B. |
| C2 | 2036 | Test condition A, weight = 10 lbs (4.5 kg), t = 15 seconds. |
| C6 | 1037 | $V_{CB}$ ≥ -10 V dc. |

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Thermal resistance. Thermal resistance measurement shall be conducted in accordance with test method 3131 of MIL-STD-750. The following details shall apply:

a. Collector current magnitude during power application shall be -1.0 A dc.

b. Collector to emitter voltage magnitude shall be ≥ -10 V dc.

c. Reference temperature measuring point shall be the case.

d. Reference point temperature shall be +25 °C ≤ $T_R$ ≤ +75 °C and recorded before the test is started.

e. Mounting arrangement shall be with heat sink to header.

f. Maximum limit of $R_{\theta JC}$ shall be 1.5 °C/W.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | Limits | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance | 3131 | See 4.3.2 | $Z_{\theta JC}$ | | | |
| Collector - emitter breakdown voltage | 3011 | Bias condition D; $I_C$ = -100 mA dc, pulsed (see 4.5.1) | $V_{CEO(sus)}$ | -100 | | V dc |
| Collector - emitter cutoff current | 3036 | Bias condition D; $V_{CE}$ = -50 V dc | $I_{CEO}$ | | -1.0 | mA dc |
| Emitter - base cutoff current | 3061 | Bias condition D; $V_{EB}$ = -5 V dc | $I_{EBO}$ | | -2.0 | mA dc |
| Collector - emitter cutoff current | 3041 | Bias condition A; $V_{BE}$ = +1.5 V dc, $V_{CE}$ = -100 V dc | $I_{CEX1}$ | | -20 | µA dc |
| Base - emitter saturated voltage | 3066 | Test condition A; $I_C$ = -12 A dc, $I_B$ = -120 mA dc, pulsed (see 4.5.1) | $V_{BE(sat)}$ | | -4.0 | V dc |
| Collector - emitter saturated voltage | 3071 | $I_C$ = -12 A dc; $I_B$ = -120 mA dc, pulsed (see 4.5.1) | $V_{CE(sat)}$ | | -3.0 | V dc |
| Forward - current transfer ratio | 3076 | $V_{CE}$ = -3.0 V dc; $I_C$ = -6.0 A dc, pulsed (see 4.5.1) | $h_{FE1}$ | 1000 | 18,000 | |
| Forward - current transfer ratio | 3076 | $V_{CE}$ = -3.0 V dc; $I_C$ = -12 A dc, pulsed (see 4.5.1) | $h_{FE2}$ | 150 | | |
| Subgroup 3 | | | | | | |
| High temperature operation: | | $T_A$ = +150 °C | | | | |
| Collector to emitter cutoff current | 3041 | Bias condition C; $V_{BE}$ = +1.5 V dc, $V_{CE}$ = -100 V dc | $I_{CEX2}$ | | -1.0 | mA dc |
| Low temperature operation: | | $T_A$ = -55 °C | | | | |
| Forward - current transfer ratio | 3076 | $V_{CE}$ = -3.0 V dc; $I_C$ = -6.0 A dc, pulsed (see 4.5.1) | $h_{FE3}$ | 300 | | |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | Limits | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 4 | | | | | | |
| Switching parameters | | | | | | |
| Turn-on | | See figure 4 | $t_{on}$ | | 2.0 | µs |
| Turn-off | | See figure 4 | $t_{off}$ | | 10 | µs |
| Magnitude of small-signal short-circuit forward-current transfer ratio | 3306 | $V_{CE}$ = -3.0 V dc, $I_C$ = -5.0 A dc, f = 1 MHz | \|hfe\| | 10 | 250 | |
| Subgroup 5 | | | | | | |
| Safe operating area (continuous dc) | 3051 | $T_C$ = 25 °C; t ≥ 1 s; 1 cycle; (see figure 5) | | | | |
| Test 1 | | $V_{CE}$ = -8.3 V dc; $I_C$ = -12.0 A dc | | | | |
| Test 2 | | $V_{CE}$ = -30 V dc; $I_C$ = -3.3 A dc | | | | |
| Test 3 | | $V_{CE}$ = -90 V dc; $I_C$ = -150 mA dc | | | | |
| Safe operating area (clamped inductive) | 3053 | Load condition B (clamped inductive load); $T_A$ = +25°C; tr + tf ≤ 1.0 µs; duty cycle ≤ 2 percent; tp = 1 ms; (vary to obtain $I_C$); Rs = 0.10 ohms; $R_{BB1}$ = 80 ohms; $V_{BB1}$ = -16 V dc; $R_{BB2}$ = 100 ohms; $V_{BB2}$ = -1.5 V dc; $I_C$ = -12 A dc; $V_{CC}$ = -20 V dc; $R_L$ ≤ 2 ohms; L = 10 mH; (Stancor C-2688 or equivalent) clamp voltage = -100 +0, -5 V dc; Device fails if clamp voltage not reached. | | | | |
| Electrical measurements | | See table I, subgroup 2 | | | | |
| Subgroups 6 and 7 | | | | | | |
| Not applicable | | | | | | |

1/ For sampling plan, see MIL-PRF-19500.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) - for qualification or re-qualification only.

| Inspection | MIL-STD-750 | | Sample plan |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices, c = 0 |
| Temperature cycling (air to air) | 1051 | 500 cycles. | |
| Hermetic seal | 1071 | Fine and gross leak. | |
| Electrical measurements | | See table I, subgroup 2 herein. | |
| Subgroup 2 | | | 45 devices, c = 0 |
| High temperature reverse bias | 1039 | Condition A; 1,000 hours. | |
| Electrical measurements | | See table I, subgroup 2 herein. | |
| Subgroup 4 | | | |
| Thermal impedance curves | | See table E-IX of MIL-PRF-19500, group E, subgroup 4. | |
| Subgroup 5 | | | |
| Not applicable | | | |
| Subgroup 8 | | | 45 devices, c = 0 |
| Reverse stability | 1033 | Condition B for devices < 400 V. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

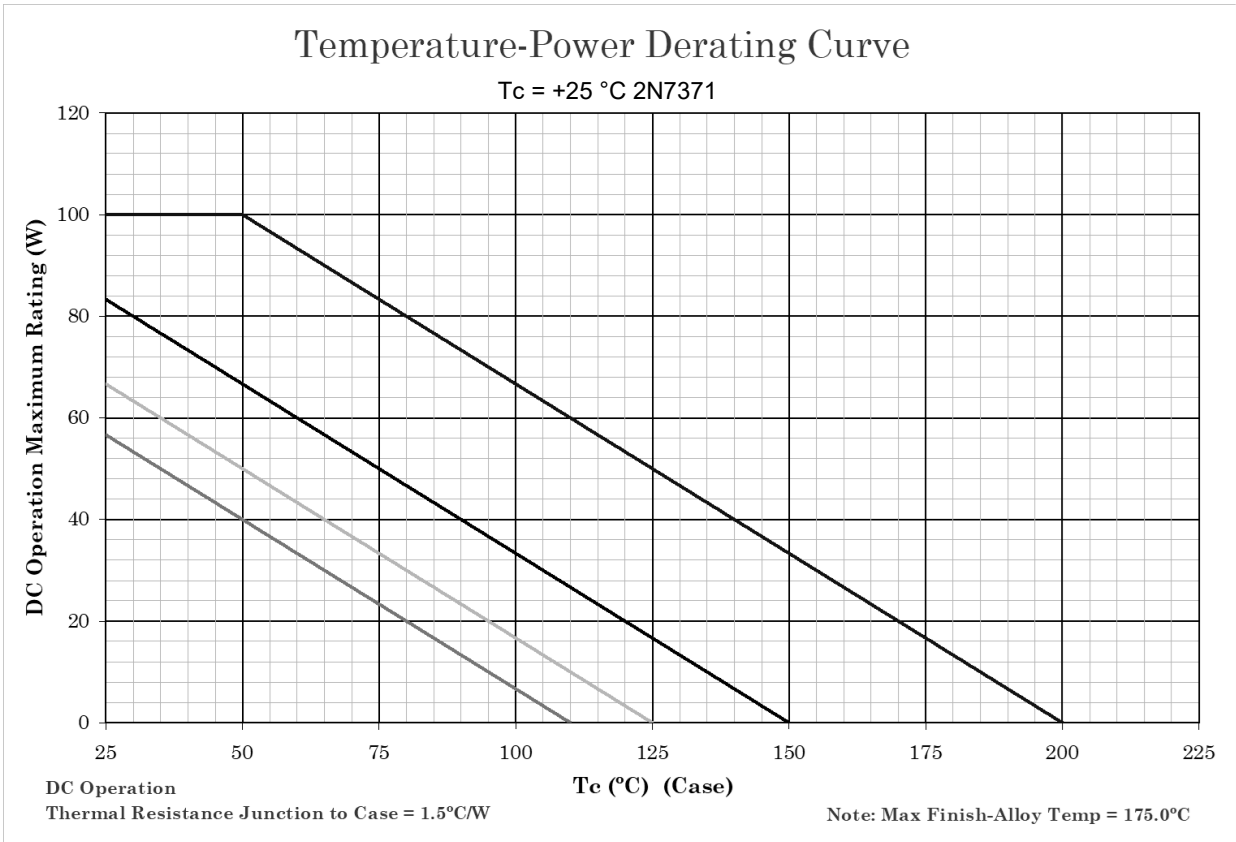


NOTES:


1. Maximum theoretical derate design curve. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at ≤ $T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperatures and power rating specified (see 1.3).
3. Derate design curve chosen at $T_J$ ≤ +150 °C, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J$ ≤ +125 °C, and +110 °C to show power rating where most users want to limit $T_J$ in their application.

FIGURE 2. Temperature-power derating graph.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

**Maximum Thermal Impedance**

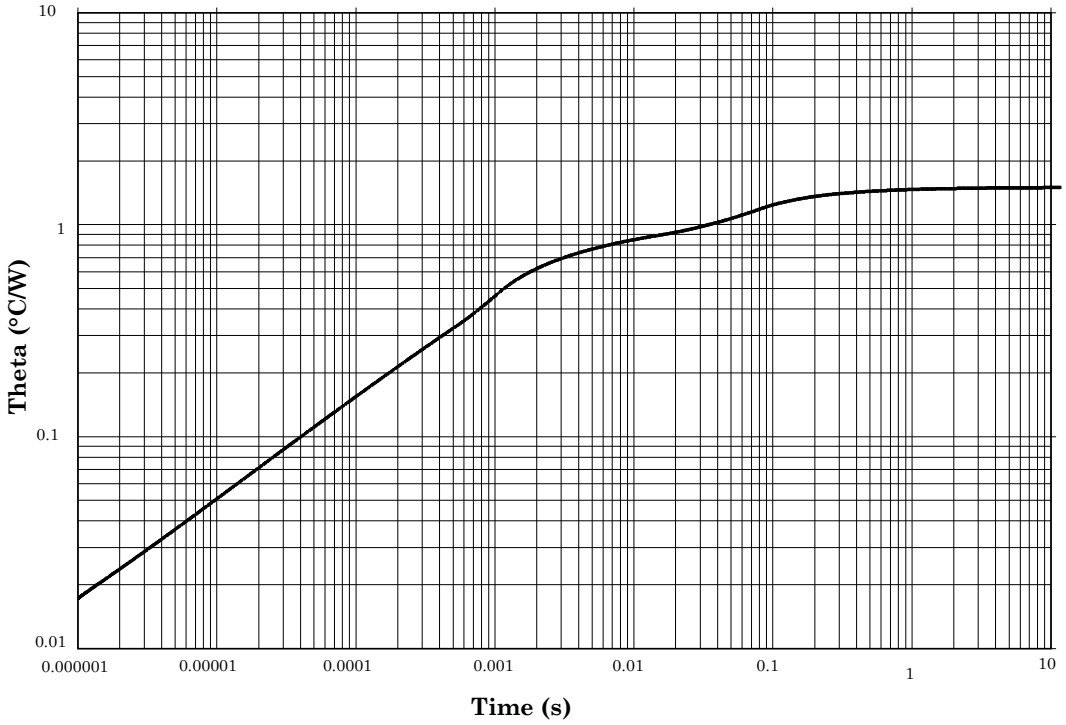



$T_C$ = +25 °C. Thermal resistance = 1.5 °C/W.

FIGURE 3. Transient thermal impedance graph.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

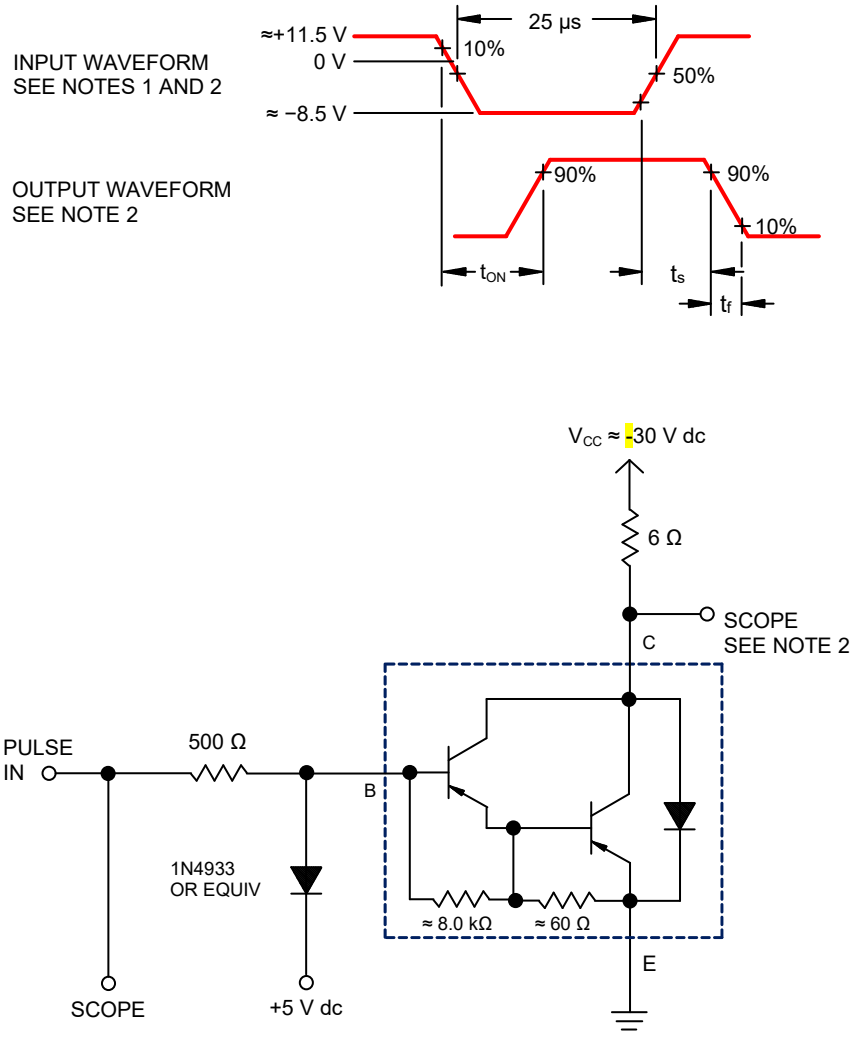



NOTES:

1. The input waveform is supplied by a pulse generator with the following characteristics: $t_r \leq 20$ ns, $t_f \leq 20$ ns, $Z_{OUT} = 50\ \Omega$, PW = 25 µs, duty cycle ≤ 2 percent.
2. Output waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 20$ ns, $Z_{IN} \geq 20$ kΩ, $C_{IN} \leq 11.5$ pF.
3. Resistors shall be noninductive types.
4. The dc power supplies may require additional by-passing in order to minimize ringing.

* FIGURE 4. Pulse response test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

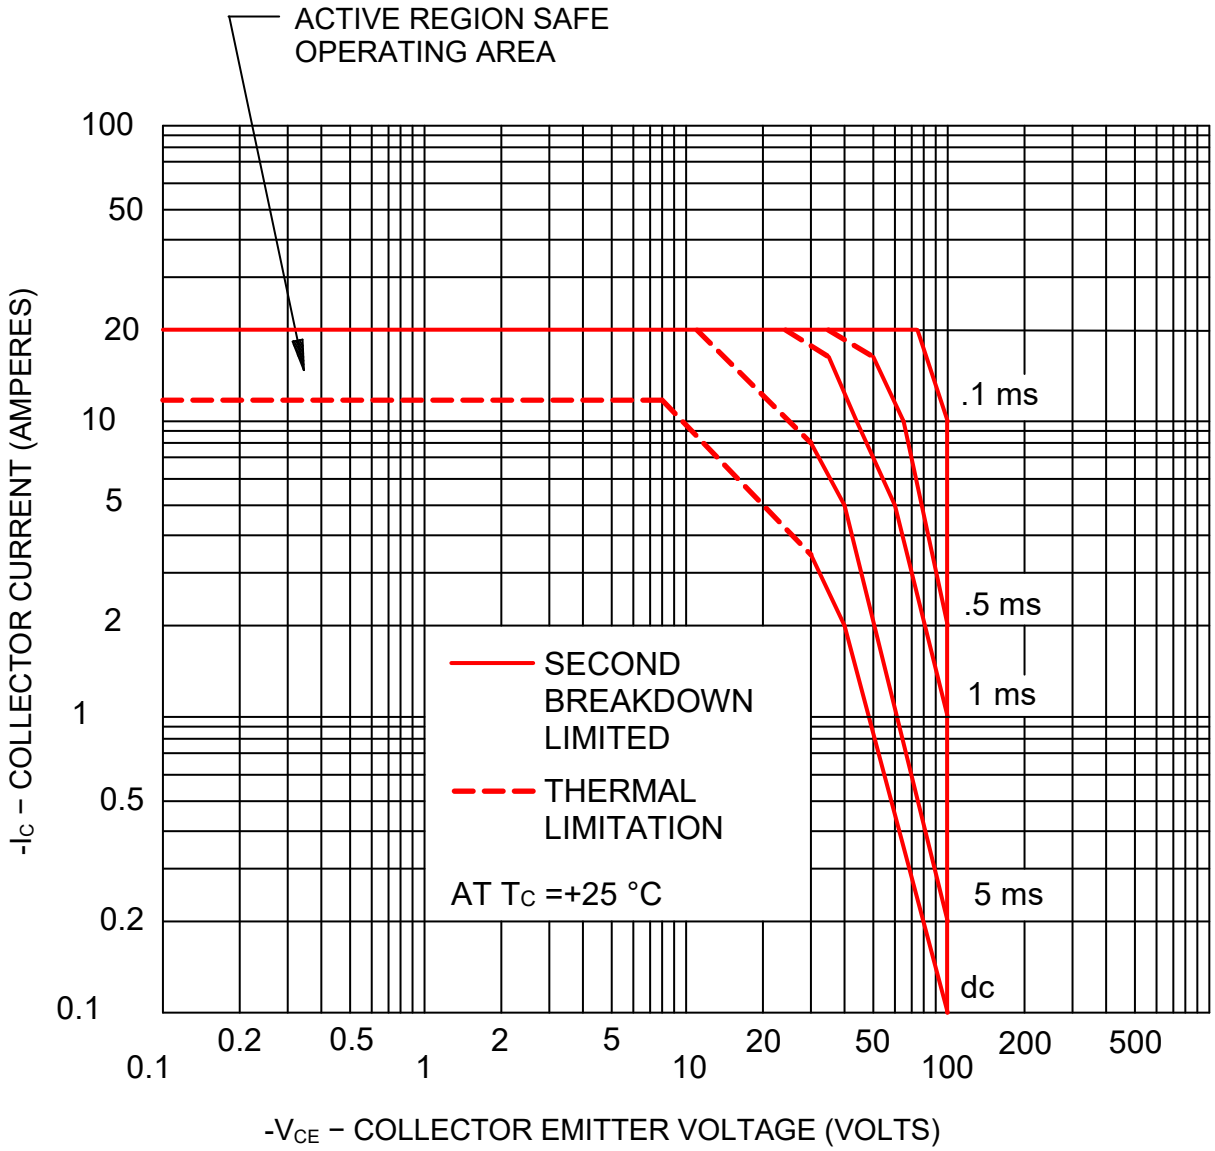


* FIGURE 5. Safe operating area.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.


b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1) and if applicable, any needed lead formation (see 3.4.2).

d. The complete PIN, see 1.5 and 6.5.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

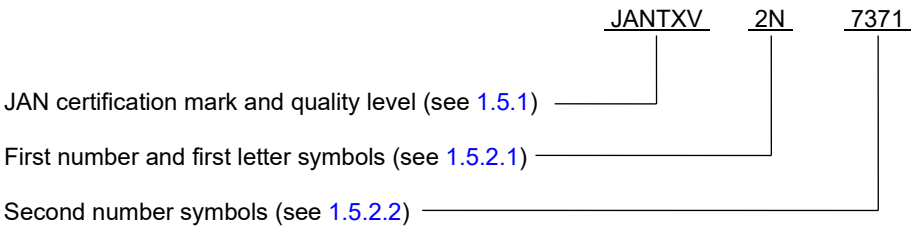




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.

6.5 List of PINs. The following is a list of possible PINs for encapsulated devices available on this specification sheet.

| PINs for devices of the base quality level | PINs for devices of the "TX" quality level | PINs for devices of the "TXV" quality level | PINs for devices of the "S" quality level |
|---|---|---|---|
| JAN2N7371 | JANTX2N7371 | JANTXV2N7371 | JANS2N7371 |

6.6 Interchangeability information. The die of device type 2N7371 covered by this specification sheet is the same die as device type 2N3792 covered by MIL-PRF-19500/501. However, the package outline of this specification sheet is a TO-254AA package whereas the package outline of MIL-PRF-19500/501 is a TO-204AA (formerly TO-3) package. The devices from this specification sheet are preferred over the devices of MIL-PRF-19500/501 whenever interchangeability is not a problem.

* 6.7 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army − CR
* Navy - SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − AR, MI, SM
Navy − AS
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961-2025-079)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:17Z
Check the source to verify that this is the current version before use.