The documentation and process conversion measures necessary to comply with this revision shall be completed by 23 March 2026.

INCH-POUND

MIL-PRF-19500/702E
w/AMENDMENT 3
23 December 2025
SUPERSEDING
MIL-PRF-19500/702E
w/AMENDMENT 2
9 December 2024

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, FIELD EFFECT, N-CHANNEL, RADIATION HARDENED,
SILICON, ENCAPSULATED (THROUGH HOLE PACKAGE),
TYPES 2N7482, 2N7483, AND 2N7484, JANTXVR, F, G, AND H AND JANSR, F, G, AND H

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for an N-Channel, enhancement-mode, MOSFET, radiation hardened (total dose and single event effects (SEE)), power transistor. Two levels of product assurance (JANTXV and JANS) are provided for each encapsulated device, with avalanche energy maximum rating ($E_{AS}$) and maximum avalanche current ($I_{AS}$). See 6.7 for JANHC and JANKC die versions. Provisions for radiation hardness assurance (RHA) to four radiation levels ("R", "F", "G" and "H") are provided for JANTXV and JANS product assurance levels.

1.2 Package outlines. The device package outlines are as follows: TO-257AA in accordance with figure 1 for all encapsulated device types.

1.3 Maximum ratings. $T_A$ = +25°C, unless otherwise specified.

| Type | $P_T$ (1) $T_C$ = +25°C | $P_T$ $T_A$ = +25°C | $R_{\theta JC}$ (2) | $V_{DS}$ | $V_{DG}$ | $V_{GS}$ | $I_{D1}$ (3) (4) $T_C$ = +25°C | $I_{D2}$ (3) (4) $T_C$ = +100°C | $I_S$ | $I_{DM}$ (5) | $T_J$ and $T_{STG}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | W | W | °C/W | V dc | V dc | V dc | A dc | A dc | A dc | A (pk) | °C |
| 2N7482T3 | 75 | 1.56 | 1.67 | 30 | 30 | ±20 | 18 | 18 | 18 | 72 | -55 to +150 |
| 2N7483T3 | 75 | 1.56 | 1.67 | 60 | 60 | ±20 | 18 | 18 | 18 | 72 | |
| 2N7484T3 | 75 | 1.56 | 1.67 | 100 | 100 | ±20 | 18 | 14 | 18 | 72 | |

(1) Derate linearly 0.6 W/°C for $T_C$ > +25°C.
(2) See figure 2, thermal impedance curves.
(3) The following formula derives the maximum theoretical $I_D$ specs. $I_D$ is limited to 18A by package and device construction.

$$I_D = \sqrt{\frac{T_{JM} - T_C}{(R_{\theta JC}) \times (R_{DS}(on) \text{ at } T_{JM})}}$$

(4) See figure 3, maximum drain current graph.
(5) $I_{DM}$ = 4 X $I_{D1}$, as defined in note (3).

Comments, suggestions, or questions on this document should be addressed to DLA Weapons Support, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A
FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics at $T_C$ = +25°C.

| Type | Min $V_{(BR)DSS}$ $V_{GS}$ = 0 $I_D$ = 1.0mA dc | $V_{GS(TH)1}$ $V_{DS} \geq V_{GS}$ $I_D$ = 1.0 mA dc | | Max $I_{DSS1}$ $V_{GS}$ = 0 $V_{DS}$ = 80 percent of rated $V_{DS}$ | Max $r_{DS(on)}$ (1) $V_{GS}$ = 12V, $I_D$ = $I_{D2}$ | | $E_{AS}$ |
|---|---|---|---|---|---|---|---|
| | | | | | $T_J$ = +25°C | $T_J$ = +150°C | |
| | V dc | V dc Min | V dc Max | µA dc | Ω | Ω | mJ |
| 2N7482T3 | 30 | 2.0 | 4.0 | 10 | 0.030 | 0.060 | 177 |
| 2N7483T3 | 60 | 2.0 | 4.0 | 10 | 0.040 | 0.080 | 110 |
| 2N7484T3 | 100 | 2.0 | 4.0 | 10 | 0.070 | 0.160 | 87 |

(1) Pulsed (see 4.5.1).

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANTXV" and "JANS".

1.5.2 Radiation hardness assurance (RHA) designator. The RHA levels that are applicable for this specification sheet from lowest to highest are as follows: "R", "F", "G", and "H".

1.5.3 JAN brand and quality level designators for unencapsulated devices (die). See 6.7 for unencapsulated devices.

1.5.4 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

1.5.4.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".

1.5.4.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet are as follows: "7482", "7483", and "7484".

1.5.4.3 Suffix letters. The suffix letters "T3" are used on devices that are packaged in the TO-257A package of figure 1.

1.5.5 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

1.6 Radiation features. The following radiation features are applicable for RHA devices supplied to this specification sheet.

1.6.1 Maximum total ionizing dose (TID). The maximum TID that RHA devices were tested to in accordance with condition A (dose rate = 50 to 300 rad(Si)/s) of method 1019 of MIL-STD-750 are as follows:

For device type 2N7482T3, 2N7483T3, AND 2N7484T3: ..... 500 krad(Si) 1/

* 1.6.2 Heavy ion irradiation SEE. SEE testing includes Single-Event Burnout (SEB) and Single-Event Gate Rupture (SEGR) tests at the specified linear energy transfer (LET) units. See 6.8 for the specific RHA SEE characterization testing details. The following characterization conditions were used for the testing to the requirements herein:

For device type 2N7482T3:
No SEB and SEGR were observed at surface LET (see table IV) ..... ≤ 84 MeV·cm$^2$/mg 2/
($V_{DS}$ = 25 V and $V_{GS}$ = 0 V)
($V_{DS}$ = 25 V and $V_{GS}$ = -5 V)
($V_{DS}$ = 20 V and $V_{GS}$ = -10 V)


For device type 2N7483T3:
No SEB and SEGR were observed at surface LET (see table IV) ..... ≤ 84 MeV·cm$^2$/mg 2/
($V_{DS}$ = 35 V and $V_{GS}$ = 0 V)
($V_{DS}$ = 30 V and $V_{GS}$ = -5 V)
($V_{DS}$ = 25 V and $V_{GS}$ = -10 V)
($V_{DS}$ = 20 V and $V_{GS}$ = -15 V)
($V_{DS}$ = 15 V and $V_{GS}$ = -20 V)

For device type 2N7484T3:
No SEB and SEGR were observed at surface LET (see table IV) ..... ≤ 84 MeV·cm$^2$/mg 2/
($V_{DS}$ = 100 V and $V_{GS}$ = 0 V)
($V_{DS}$ = 100 V and $V_{GS}$ = -5 V)
($V_{DS}$ = 80 V and $V_{GS}$ = -10 V)
($V_{DS}$ = 25 V and $V_{GS}$ = -15 V)

1/ The manufacturers supplying these device types have performed characterization testing in accordance with condition A (dose rate = 50 to 300 rad(Si)/s) of method 1019 of MIL-STD-750. The radiation end point limits are guaranteed only to a maximum TID level of 500 krad(Si).
2/ The manufacturers have performed SEE tests at Brookhaven National Lab Accelerator in accordance with method1080 of MIL-STD-750. For more information on SEE testing and results, customers should contact the qualified manufacturer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

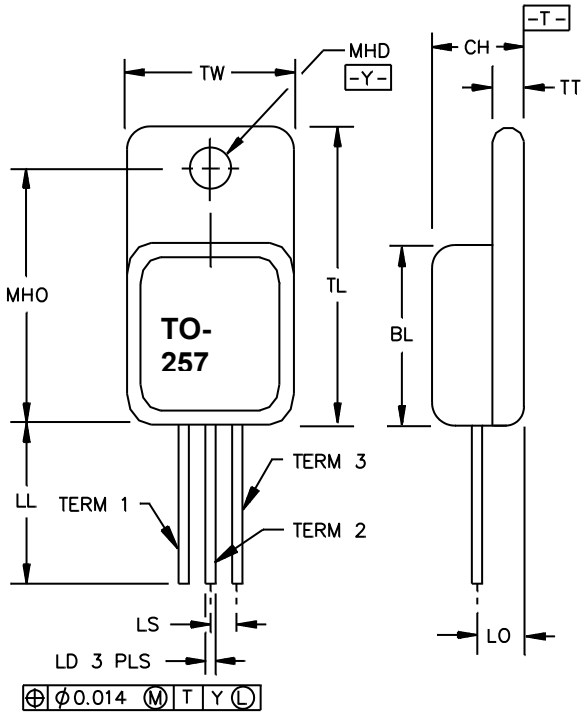


| Symbol | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| BL | .410 | .430 | 10.41 | 10.92 |
| CH | .190 | .200 | 4.83 | 5.08 |
| LD | .025 | .035 | 0.64 | 0.89 |
| LL | .500 | .650 | 12.70 | 16.51 |
| LO | .120 | | 3.05 | |
| LS | .100 BSC | | 2.54 | |
| MHD | .140 | .150 | 3.56 | 3.81 |
| MHO | .527 | .537 | 13.39 | 13.64 |
| TL | .645 | .665 | 16.38 | 16.89 |
| TT | .035 | .045 | .889 | 1.14 |
| TW | .410 | .420 | 10.41 | 10.67 |
| TERM 1 | Drain | | | |
| TERM 2 | Source | | | |
| TERM 3 | Gate | | | |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. All terminals are isolated from case.
4. Protrusion thickness of ceramic eyelets included in dimension LL.

FIGURE 1. Dimensions and configuration (TO-257AA, T3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.
MIL-STD-883 - Test Method Standard Microcircuits

(Copies of these documents are available online at https://quicksearch.dla.mil/).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 (TO-257AA, T3) herein.

3.4.1 Lead finish. Unless otherwise specified, lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Internal construction. Multiple chip construction shall not be permitted.

3.4.3 Silicone die coat. The use of a silicone die coat requires a successful completion of method 5011 of MIL-STD-883, on each lot of silicone die coating for its intended applications.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

3.5 Electrostatic discharge sensitive (ESDS). The devices covered by this specification sheet have been classified as ESDS. The devices shall be handled in accordance with the ESD program established to comply with the requirements of MIL-PRF-19500 to avoid damage due to the accumulation of static charge. The following handling practices shall be followed:

a. Devices shall be handled on benches with conductive handling devices.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent if practical.

g. Care should be exercised during test and troubleshooting to apply not more than maximum rated voltage to any lead.

h. Gate must be terminated to source, R ≤ 100 kΩ, whenever bias voltage is to be applied drain to source.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.8 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.9 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4, table I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.2.1.1 Single Event Effects (SEE). SEE shall be performed at initial qualification and after process or design changes which may affect radiation hardness (see table III and table IV). Upon qualification, manufacturers shall provide the verification test conditions from section 5 of method 1080 of MIL-STD-750 that were used to qualify the device for inclusion into section 6 of the slash sheet. End-point measurements shall be in accordance with table II. SEE characterization data shall be made available upon request of the qualifying or acquiring activity.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

4.2.2 Silicone die coating. When silicone die coating is used, method 5011 of MIL-STD-883 shall be performed on that coating in the full MIL-PRF-19500 qualification process.

4.3 Screening (JANS and JANTXV). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (1) (2) | Measurements for JANS | Measurements for JANTXV |
|---|---|---|
| (3) | Gate stress test (see 4.3.1) | Gate stress test (see 4.3.1) |
| (3) | Method 3470 of MIL-STD-750, $E_{AS}$ test (see 4.3.2) | Method 3470 of MIL-STD-750, $E_{AS}$ test (see 4.3.2) |
| (3) 3c | Method 3161 of MIL-STD-750, thermal impedance (see 4.3.3) | Method 3161 of MIL-STD-750, thermal impedance (see 4.3.3) |
| 5 | Method 2052 of MIL-STD-750, PIND (see MIL-PRF-19500 and 4.3.4) | Not applicable |
| 9 | Subgroup 2 of table I herein<br>$I_{DSS1}$, $I_{GSSF1}$, and $I_{GSSR1}$ as a minimum | Not applicable |
| 10 | Method 1042 of MIL-STD-750, test condition B | Method 1042 of MIL-STD-750, test condition B |
| 11 | $I_{GSSF1}$, $I_{GSSR1}$, $I_{DSS1}$, $r_{DS(ON)1}$, $V_{GS(TH)1}$ , subgroup 2 of table I herein.<br>$\Delta I_{GSSF1}$ = ±20 nA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta I_{GSSR1}$ = ±20 nA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta I_{DSS1}$ = ±10 μA dc or ±100 percent of initial value, whichever is greater. | $I_{GSSF1}$, $I_{GSSR1}$, $I_{DSS1}$, $r_{DS(ON)1}$, $V_{GS(TH)1}$ , subgroup 2 of table I herein. |
| 12 | Method 1042 of MIL-STD-750, test condition A | Method 1042 of MIL-STD-750, test condition A |
| 13 | Subgroups 2 and 3 of table I herein,<br>$\Delta I_{GSSF1}$ = ±20 nA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta I_{GSSR1}$ = ±20 nA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta I_{DSS1}$ = ±10 μA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta r_{DS(ON)1}$ = ±20 percent of initial value.<br>$\Delta V_{GS(TH)1}$ = ±20 percent of initial value. | Subgroups 2 and 3 of table I herein,<br>$\Delta I_{GSSF1}$ = ±20 nA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta I_{GSSR1}$ = ±20 nA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta I_{DSS1}$ = ±10 μA dc or ±100 percent of initial value, whichever is greater.<br>$\Delta r_{DS(ON)1}$ = ±20 percent of initial value.<br>$\Delta V_{GS(TH)1}$ = ±20 percent of initial value. |

(1) At the end of the test program, $I_{GSSF1}$, $I_{GSSR1}$, and $I_{DSS1}$ are measured.
(2) An out-of-family program to characterize $I_{GSSF1}$, $I_{GSSR1}$, $I_{DSS1}$, $V_{GS(th)1,}$ and $r_{DS(ON)1}$ shall be invoked.
(3) Shall be performed anytime after temperature cycling, screen 3a; JANTXV level does not need to be repeated in screening requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

4.3.1 Gate stress test. Apply $V_{GS}$ = ±24 V, minimum for t = 250 μs, minimum.

4.3.2 Single pulse avalanche energy ($E_{AS}$).

a. Peak current ..... $I_{AS} = I_{D1}$.

b. Inductance ..... L = $\left[\frac{2E_{AS}}{(I_{D1})^2}\right]\left[\frac{V_{BR} - V_{DD}}{V_{BR}}\right]$ mH minimum.

c. Gate to source resistor $R_{GS}$: ..... 25 Ω ≤ $R_{GS}$ ≤ 200 Ω.

d. Supply voltage ..... $V_{DD}$ = 25 V dc, except $V_{DD}$ = 50 V dc for 2N7484T3.

e. Initial case temperature ..... $T_C$ = +25° C, -5° C, +10° C.

f. Gate voltage, ..... $V_{GS}$ = 12 V dc.

g. Number of pulses to be applied: ..... 1 pulse minimum.

4.3.3 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3161 of MIL-STD-750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{SW}$, (and $V_H$ where appropriate). See table III, group E, subgroup 4 herein.

4.3.4 PIND. Not applicable in screening when devices are processed using alternative method and flow requirements approved by the qualifying activity, that includes incorporating the use of certified clean processing and silicone die coat. Instead, the PIND test performance shall be performed in group B3 and group C3, on a lot sample basis. PIND failures detected in group B or C will represent lot jeopardy and shall be evaluated for root cause and lot integrity.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) and table E-VIB (JANTXV) of MIL-PRF-19500, and as follows.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

4.4.2.1 Quality level JANS, table E-VIA of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B3 | 1051 | Test condition G, 100 cycles. |
| B3 | 2077 | SEM (scanning electron microscope). |
| B3 | 2052 | PIND, required if not performed in screening. (22 devices, c = 0 for large lots, 12 devices, c = 0 for small lots). |
| B4 | 1042 | Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle. $t_{on}$ = 30 seconds minimum. |
| B5 | 1042 | Accelerated steady-state gate bias, condition B, $V_{GS}$ = rated; $T_A$ = +175°C, t = 24 hours minimum; or $T_A$ = +150°C, t = 48 hours minimum. |
| B5 | 1042 | Accelerated steady-state reverse bias, condition A, $V_{DS}$ = rated; $T_A$ = +175°C, t = 120 hours minimum; or $T_A$ = +150°C, t = 240 hours minimum. |
| B5 | 2037 | Bond strength, test condition D. |

4.4.2.2 Quality level JANTXV, table E-VIB of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B2 | 1051 | Test condition G, 25 cycles. |
| B3 | 1042 | Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle. $t_{on}$ = 30 seconds minimum. |

4.4.2.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows.

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 2036 | Test condition A; weight = 10 pounds (4.54 kg); t = 10 s. |
| C3 | 2052 | PIND, required if not performed in screening. (22 devices, c = 0 for large lots, 12 devices, c = 0 for small lots). |
| C5 | 3161 | Thermal resistance, see 4.3.3, $R_{\theta JC(max)}$ = 1.67°C/W. |
| C6 | 1042 | Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle. $t_{on}$ = 30 seconds minimum. |

4.4.3 Group D inspection. Group D inspection shall be conducted in accordance with table E-VIII of MIL-PRF-19500 and table II herein.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | Limits | Unit |
|---|---|---|---|---|---|---|
| | Method | Condition | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical inspection | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance 2/ | 3161 | See 4.3.3 | $Z_{\theta JC}$ | | | °C/W |
| Breakdown voltage drain to source | 3407 | $V_{GS}$ = 0, $I_D$ = 1 mA dc, bias condition C | $V_{(BR)DSS}$ | | | |
| 2N7482T3 | | | | 30 | | V dc |
| 2N7483T3 | | | | 60 | | V dc |
| 2N7484T3 | | | | 100 | | V dc |
| Gate to source voltage (threshold) | 3403 | $V_{DS} \geq V_{GS}$, $I_D$ = 1 mA dc | $V_{GS(TH)1}$ | 2.0 | 4.0 | V dc |
| Gate current | 3411 | $V_{GS}$ = +20 V dc, bias condition C, $V_{DS}$ = 0 | $I_{GSSF1}$ | | +100 | nA dc |
| Gate current | 3411 | $V_{GS}$ = -20 V dc, bias condition C, $V_{DS}$ = 0 | $I_{GSSR1}$ | | -100 | nA dc |
| Drain current | 3413 | $V_{GS}$ = 0, bias condition C, $V_{DS}$ = 80 percent of rated $V_{DS}$, | $I_{DSS1}$ | | 10 | µA dc |
| Static drain to source on state resistance | 3421 | $V_{GS}$ = 12 V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D2}$ | $r_{DS(ON)1}$ | | | |
| 2N7482T3 | | | | | 0.030 | Ω |
| 2N7483T3 | | | | | 0.040 | Ω |
| 2N7484T3 | | | | | 0.070 | Ω |
| Forward voltage | 4011 | $V_{GS}$ = 0, condition A, pulsed (see 4.5.1), $I_D = I_{D1}$ | $V_{SD}$ | | | |
| 2N7482T3 | | | | | 1.2 | V dc |
| 2N7483T3 | | | | | 1.2 | V dc |
| 2N7484T3 | | | | | 1.2 | V dc |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | Limits | Unit |
|---|---|---|---|---|---|---|
| | Method | Condition | | Min | Max | |
| Subgroup 3 | | | | | | |
| High temperature operation | | $T_C = T_J = +125°C$ | | | | |
| Gate current | 3411 | $V_{GS} = \pm 20V$ dc, bias condition C, $V_{DS} = 0$ | $I_{GSS2}$ | | ±200 | nA dc |
| Drain current | 3413 | $V_{GS} = 0$, bias condition C, $V_{DS}$ = 80 percent of rated $V_{DS}$ | $I_{DSS2}$ | | 25 | µA dc |
| Static drain to source on-state resistance | 3421 | $V_{GS}$ = 12 V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D2}$ | $r_{DS(ON)3}$ | | | |
| 2N7482T3 | | | | | 0.050 | Ω |
| 2N7483T3 | | | | | 0.070 | Ω |
| 2N7484T3 | | | | | 0.140 | Ω |
| Gate to source voltage (threshold) | 3403 | $V_{DS} \geq V_{GS}$, $I_D$ = 1 mA dc | $V_{GS(TH)2}$ | 1.0 | | V dc |
| Low temperature operation | | $T_C = T_J = -55°C$ | | | | |
| Gate to source voltage (threshold) | 3403 | $V_{DS} \geq V_{GS(TH)3}$, $I_D$ = 1 mA dc | $V_{GS(TH)3}$ | | 5.0 | V dc |
| Subgroup 4 | | | | | | |
| Forward transconductance | 3475 | $I_D = I_{D2}$, $V_{DD}$ = 15 V dc (see 4.5.1) | $g_{FS}$ | | | |
| 2N7482T3 | | | | 16 | | S |
| 2N7483T3 | | | | 16 | | S |
| 2N7484T3 | | | | 13 | | S |
| Switching time test | 3472 | $I_D = I_{D1}$, $V_{GS}$ = 12 V dc, $R_G$ = 7.5 Ω, $V_{DD}$ = 50 percent of rated $V_{DS}$ | | | | |
| Turn-on delay time | | | $t_{D(on)}$ | | 25 | ns |
| Rise time | | | $t_r$ | | 100 | ns |
| Turn-off delay time | | | $t_{D(off)}$ | | 35 | ns |
| Fall time | | | $t_f$ | | 30 | ns |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | Limits | Unit |
|---|---|---|---|---|---|---|
| | Method | Condition | | Min | Max | |
| Subgroup 5 | | | | | | |
| Safe operating area test (high voltage) | 3474 | See figure 4, $t_p$ = 10 ms min. $V_{DS}$ = 80 percent of max. rated $V_{DS}$ | | | | |
| Electrical measurements | | See table I, subgroup 2 | | | | |
| Subgroup 6 | | | | | | |
| Not applicable | | | | | | |
| Subgroup 7 | | | | | | |
| Gate charge | 3471 | Condition B, $I_D = I_{D1}$, $V_{GS}$ = 12 V dc, $V_{DD}$ = 50 percent of rated $V_{DS}$ | | | | |
| On-state gate charge | | | $Q_{G(ON)}$ | | | |
| 2N7482T3 | | | | | 65 | nC |
| 2N7483T3 | | | | | 45 | nC |
| 2N7484T3 | | | | | 50 | nC |
| Gate to source charge | | | $Q_{GS}$ | | | |
| 2N7482T3 | | | | | 20 | nC |
| 2N7483T3 | | | | | 10 | nC |
| 2N7484T3 | | | | | 7.4 | nC |
| Gate to drain charge | | | $Q_{GD}$ | | | |
| 2N7482T3 | | | | | 10 | nC |
| 2N7483T3 | | | | | 15 | nC |
| 2N7484T3 | | | | | 20 | nC |
| Reverse recovery time | 3473 | di/dt = -100 A/µs, $V_{DD} \leq V_{(BR)DSS} \leq 50$ V, $I_D = I_{D1}$ | $t_{rr}$ | | | |
| 2N7482T3 | | | | | 102 | ns |
| 2N7483T3 | | | | | 99 | ns |
| 2N7484T3 | | | | | 250 | ns |

1/ For sampling plan, see MIL-PRF-19500.
2/ For end-point measurements, this test is required for the following subgroups:
Group B, subgroups 2 and 3 (JANTXV).
Group B, subgroups 3 and 4 (JANS).
Group C, subgroups 2 and 6.
Group E, subgroup 1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

TABLE II Group D inspection.

| Inspection 1/ 2/ 3/ | MIL-STD-750 | | Symbol | Pre-irradiation limits | | Post-irradiation limits | | | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | R, F, G and H | | R, F and G | | H 4/ | | |
| | Method | Conditions | | Min | Max | Min | Max | Min | Max | |
| Subgroup 1<br>Not applicable | | | | | | | | | | |
| Subgroup 2 | | $T_C$ = + 25°C | | | | | | | | |
| * Steady-state total dose irradiation ($V_{GS}$ bias) 5/ | 1019 | Condition A, $V_{GS}$ = 12 V; $V_{DS}$ = 0 V | | | | | | | | |
| * Steady-state total dose irradiation ($V_{DS}$ bias) 5/ | 1019 | Condition A, $V_{GS}$ = 0; $V_{DS}$ = 80 percent of rated $V_{DS}$(preirradiation) | | | | | | | | |
| End-point electricals: | | | | | | | | | | |
| Breakdown voltage, drain to source | 3407 | $V_{GS}$ = 0; $I_D$ = 1 mA; bias condition C | $V_{(BR)DSS}$ | | | | | | | |
| 2N7482T3 | | | | 30 | | 30 | | 30 | | V dc |
| 2N7483T3 | | | | 60 | | 60 | | 60 | | V dc |
| 2N7484T3 | | | | 100 | | 100 | | 100 | | V dc |
| Gate to source voltage (threshold) | 3403 | $V_{DS} \geq V_{GS}$; $I_D$ = 1 mA | $V_{GS(th)1}$ | 2.0 | 4.0 | 2.0 | 4.0 | 1.5 | 4.0 | V dc |
| Gate current | 3411 | $V_{GS}$ = +20 V; $V_{DS}$ = 0, bias condition C | $I_{GSSF1}$ | | 100 | | 100 | | 100 | nA dc |
| Gate current | 3411 | $V_{GS}$ = -20 V; $V_{DS}$ = 0, bias condition C | $I_{GSSR1}$ | | -100 | | -100 | | -100 | nA dc |
| Drain current | 3413 | $V_{GS}$ = 0; $V_{DS}$ = 80 percent of rated $V_{DS}$ (preirradiation), bias condition C | $I_{DSS}$ | | 10 | | 10 | | 25 | µA dc |
| Static drain to source on-state voltage | 3405 | $V_{GS}$ = 12 V; $I_D$ = $I_{D2}$; condition A, pulsed (see 4.5.1) | $V_{DS(on)}$ | | | | | | | |
| 2N7482T3 | | | | | 0.540 | | 0.540 | | 0.630 | V dc |
| 2N7483T3 | | | | | 0.720 | | 0.720 | | 0.864 | V dc |
| 2N7484T3 | | | | | 0.980 | | 0.980 | | 1.190 | V dc |
| Forward voltage source drain diode | 4011 | $V_{GS}$ = 0; $I_D$ = $I_{D1}$, bias condition C | $V_{SD}$ | | 1.2 | | 1.2 | | 1.2 | V dc |

1/ For sampling plan see MIL-PRF-19500.
2/ Group D inspection may be performed prior to lot formation. Wafers qualified to these group D QCI requirements may be used for any other specification sheet utilizing the same die design.
3/ At the manufacturer's option, group D samples need not be subjected to the screening tests, and may be assembled in its qualified package or in any qualified package that the manufacturer has data to correlate the performance to the designated package.
4/ The H designation represents devices which pass end-points at all R, F, and G designated total-ionizing-dose (TID) levels.
5/ Separate samples shall be pulled for each bias.
6/ Group D samples are built and tested in T0-3 packages. The equivalent pre-radiation and post radiation limit for VDS(on) in the T0-3 package is 0.432 V dc for the 2N7482T3 (R ,F, and G), 0.612 V dc for the 2N7483T3 (R ,F, and G), 0.980 V dc for the 2N7484 T3 (R ,F, and G).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

TABLE III. Group E inspection (all quality levels) for qualification or re-qualification only.

| Inspection | MIL-STD-750 | | Sample plan |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices c = 0 |
| Temperature cycling | 1051 | Test condition G, 500 cycles. | |
| Hermetic seal<br>Fine leak<br>Gross leak | 1071 | As applicable. | |
| Electrical measurements | | Table I, subgroup 2 herein. | |
| Subgroup 2 1/ | | | 45 devices c = 0 |
| Steady-state gate bias | 1042 | Condition B, 1,000 hours. | |
| Electrical measurements | | Table I, subgroup 2 herein. | |
| Steady-state reverse bias | 1042 | Condition A, 1,000 hours. | |
| Electrical measurements | | Table I, subgroup 2 herein. | |
| Subgroup 4 | | | Sample size N/A |
| Thermal impedance curves | | See MIL-PRF-19500. | |
| Subgroup 10 | | | 22 devices c = 0 |
| Commutating diode for safe operating area test procedure for measuring dv/dt during reverse recovery of power MOSFET transistors or insulated gate bipolar transistors | 3476 | Test conditions shall be derived by the manufacturer. | |
| Subgroup 11 | | | |
| SEE 2/ 3/ | 1080 | See figure 5. | |

1/ A separate sample for each test shall be pulled.
2/ Group E qualification of SEE testing may be performed prior to lot formation. Qualification may be extended to other specification sheets utilizing the same structurally identical die design.
3/ Device qualification to a higher level LET is sufficient to qualify all lower level LETs.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.


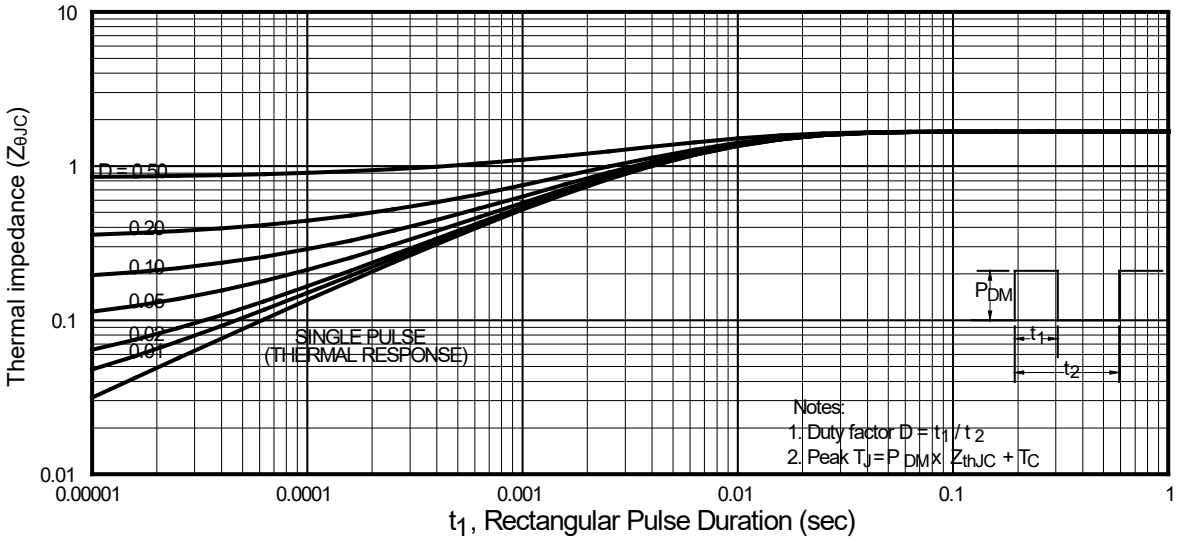



FIGURE 2. Thermal impedance curve.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

2N7482T3

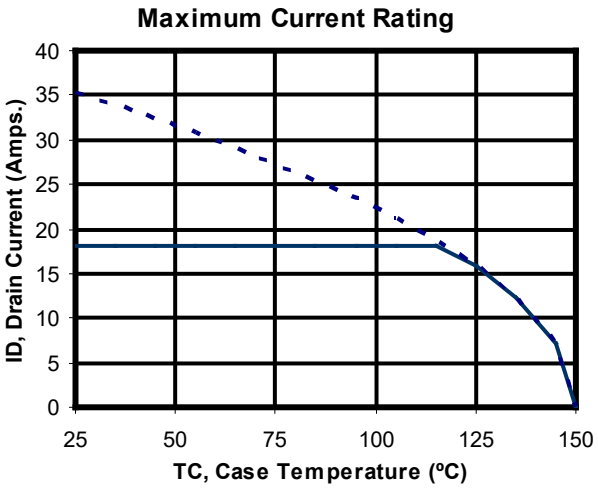


2N7483T3

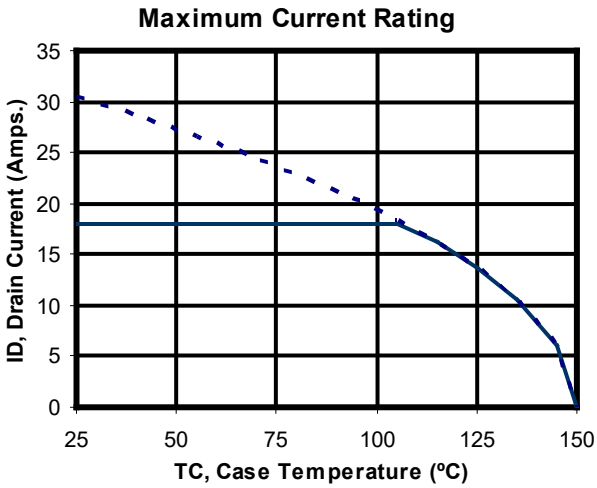


2N7484T3


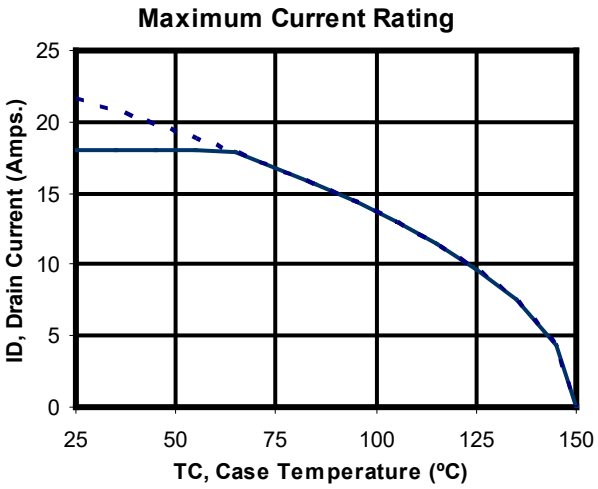



FIGURE 3. Maximum drain current versus case temperature graphs.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

2N7482T3

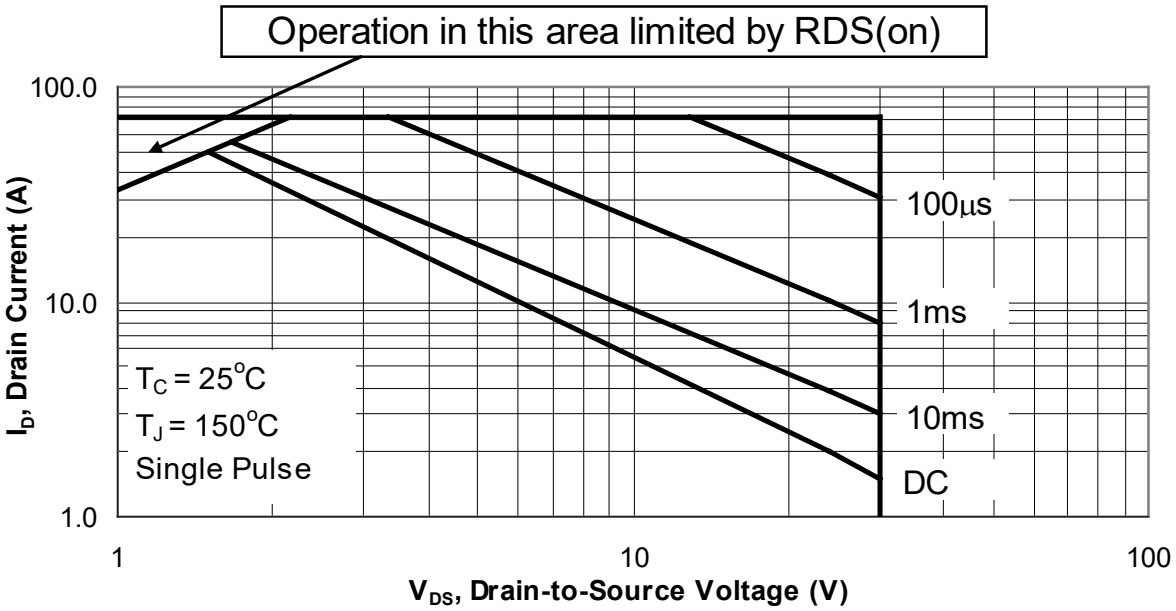


2N7483T3

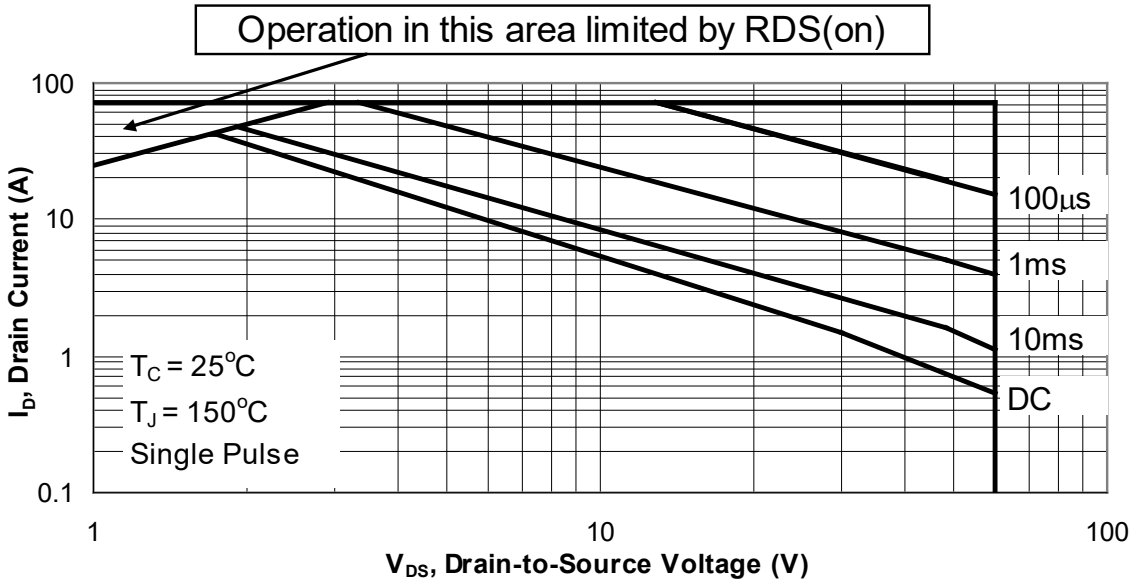



FIGURE 4. Safe operating area graph.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

2N7484T3

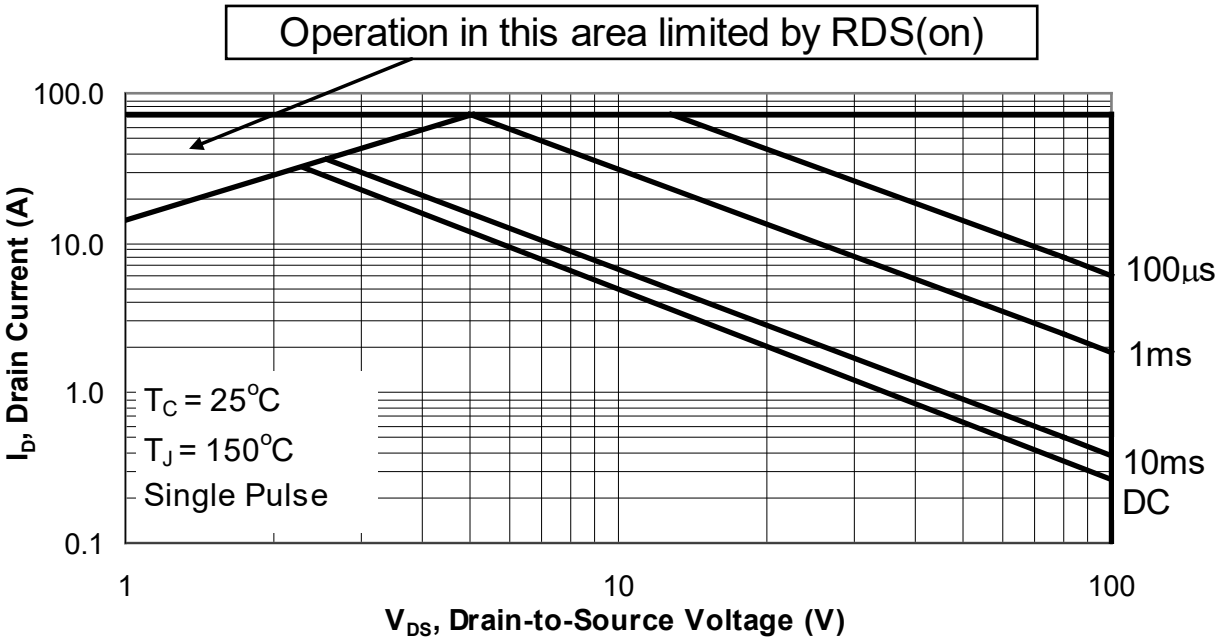



FIGURE 4. Safe operating area graph - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete PIN, see 1.5 and 6.5.

e. For acquisition of RHA designated devices, table II, subgroup 1 testing of group D herein is optional. If subgroup 1 is desired, it should be specified in the contract or order.

f. If SEE testing data is desired, it should be specified in the contract or order.


g. If specific SEE characterization conditions are desired (see section 6.8 and table IV), manufacturer's cage code should be specified in the contract or order.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Weapons Support, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

6.4 PIN construction example. The PINs for encapsulated devices are construction using the following form.

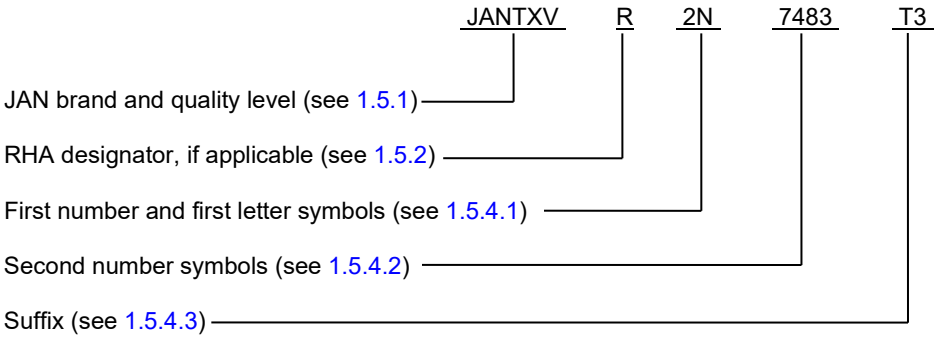


6.5 List of PINs. The following is a list of possible PINs available on this specification sheet.

| PINs for devices of the "TXV" quality level | PINs for devices of the "TXV" quality level with RHA (1) | PINs for devices of the "S" quality level | PINs for devices of the "S" quality level with RHA (1) |
|---|---|---|---|
| JANTXV2N7482T3 | JANTXV#2N7482T3 | JANS2N7482T3 | JANS#2N7482T3 |
| JANTXV2N7483T3 | JANTXV#2N7483T3 | JANS2N7483T3 | JANS#2N7483T3 |
| JANTXV2N7484T3 | JANTXV#2N7484T3 | JANS2N7484T3 | JANS#2N7484T3 |

(1) The number sign (#) represents one of four RHA designators available on this specification sheet (“R”, "F", "G" or "H").

6.6 Cross-reference list. The following information shows the generic P/N and its associated military P/N (without JAN and RHA prefix).

| Generic P/N | Military P/N |
|---|---|
| IRHY57Z30CM | 2N7482T3 |
| IRHY57034CM | 2N7483T3 |
| IRHY57130CM | 2N7484T3 |

* 6.7 JANHC and JANKC die versions. The JANHC and JANKC die versions of these devices are covered under specification sheet MIL-PRF-19500/741.

6.8 Application data.

6.8.1 Manufacturer specific irradiation data. Each manufacturer qualified to this slash sheet has characterized its devices to the requirements of MIL-STD-750 method 1080 and as specified herein. Since each manufacturer’s characterization conditions can be different and can vary by the version of method 1080 qualified to, the MIL-STD-750 method 1080 revision version date and conditions used by each manufacturer for characterization have been listed here (see table IV) for information only. SEE conditions and figures listed in section 6 are current as of the date of this specification sheet, please contact the manufacturer for the most recent conditions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturers characterization conditions.

| Manufactures cage | Inspection | MIL-STD-750 | | Sample plan |
|---|---|---|---|---|
| | | Method | Conditions | |
| 69210 (Applicable to devices with a date code of September 2009 and older) | SEE 1/ | 1080 | See MIL-STD-750E method 1080.0 dated 20 November 2006.<br>See figure 5 | |
| | Electrical measurements | | $I_{GSSF1}$, $I_{GSSR1}$, and $I_{DSS1}$ in accordance with table I, subgroup 2 | 3 devices |
| | SEE irradiation: | | Fluence = 3E5 ±20 percent ions/cm$^2$<br>Flux = 2E3 to 2E4 ions/cm$^2$/sec, temperature = 25º ±5 °C | |
| | 2N7482T3 | | Surface LET = 38 MeV-cm$^2$/mg ±5%,<br>range = 38 µm ±7.5%, Br ion energy = 300 MeV ±7.5%.<br>In situ bias conditions: $V_{DS}$ = 30 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 30 V and $V_{GS}$ = -10 V,<br>$V_{DS}$ = 22.5 V and $V_{GS}$ = -15 V,<br>$V_{DS}$ = 15 V and $V_{GS}$ = -20 V,<br>(nominal 3.86 MeV/Nucleon at Brookhaven National Lab Accelerator). | |
| | 2N7483T3 | | In situ bias conditions: $V_{DS}$ = 60 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 60 V and $V_{GS}$ = -15 V,<br>$V_{DS}$ = 30 V and $V_{GS}$ = -20 V,<br>(nominal 3.86 MeV/Nucleon at Brookhaven National Lab Accelerator. | |
| | 2N7484T3 | | In situ bias conditions: $V_{DS}$ = 100 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 100 V and $V_{GS}$ = -20 V,<br>(nominal 3.86 MeV/Nucleon at Brookhaven National Lab Accelerator). | |
| | 2N7482T3 | | Surface LET = 61 MeV-cm$^2$/mg ±5%,<br>range = 31 µm ±10%, I ion energy = 330 MeV ±7.5%,<br>In situ bias conditions: $V_{DS}$ = 25 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 25 V and $V_{GS}$ = -5 V,<br>$V_{DS}$ = 20 V and $V_{GS}$ = -10 V,<br>$V_{DS}$ = 15 V and $V_{GS}$ = -15 V,<br>$V_{DS}$ = 7.5 V and $V_{GS}$ = -20 V<br>(nominal 2.92 MeV/Nucleon at Brookhaven National Lab Accelerator). | |
| | 2N7483T3 | | In situ bias conditions: $V_{DS}$ = 46 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 46 V and $V_{GS}$ = -5 V,<br>$V_{DS}$ = 35 V and $V_{GS}$ = -10 V,<br>$V_{DS}$ = 25 V and $V_{GS}$ = -15 V,<br>$V_{DS}$ = 15 V and $V_{GS}$ = -20 V,<br>(nominal 2.92 MeV/Nucleon at Brookhaven National Lab Accelerator). | |
| | 2N7484T3 | | In situ bias conditions: $V_{DS}$ = 100 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 100 V and $V_{GS}$ = -10 V,<br>$V_{DS}$ = 35 V and $V_{GS}$ = -15 V,<br>$V_{DS}$ = 25 V and $V_{GS}$ = -20 V,<br>(nominal 2.92 MeV/Nucleon at Brookhaven National Lab Accelerator). | |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.


TABLE IV. Manufacturers characterization conditions - Continued.

| Manufactures cage | Inspection | MIL-STD-750 | | Sample plan |
|---|---|---|---|---|
| | | Method | Conditions | |
| | 2N7482T3 | | Surface LET = 84 MeV-cm$^2$/mg ±5%,<br>range = 28 µm ±7.5%, Au ion energy = 350 MeV ± 10%.<br>In situ bias conditions: $V_{DS}$ = 25 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 25 V and $V_{GS}$ = -5 V,<br>$V_{DS}$ = 20 V and $V_{GS}$ = -10 V,<br><br>(nominal 1.98 MeV/Nucleon at Brookhaven National Lab Accelerator). | |
| | 2N7483T3 | | In situ bias conditions: $V_{DS}$ = 35 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 30 V and $V_{GS}$ = -5 V,<br>$V_{DS}$ = 25 V and $V_{GS}$ = -10 V,<br>$V_{DS}$ = 20 V and $V_{GS}$ = -15 V,<br>$V_{DS}$ = 15 V and $V_{GS}$ = -20 V,<br>(nominal 1.98 MeV/Nucleon at Brookhaven National Lab Accelerator). | |
| | 2N7484T3 | | In situ bias conditions: $V_{DS}$ = 100 V and $V_{GS}$ = 0 V,<br>$V_{DS}$ = 100 V and $V_{GS}$ = -5 V,<br>$V_{DS}$ = 80 V and $V_{GS}$ = -10 V,<br>$V_{DS}$ = 25 V and $V_{GS}$ = -15 V,<br>(nominal 1.98 MeV/Nucleon at Brookhaven National Lab Accelerator). | |
| | Electrical measurements | | $I_{GSSF1}$, $I_{GSSR1}$, and $I_{DSS1}$ in accordance with table I, subgroup 2 | |
| Upon qualification, all manufacturers should provide the verification test conditions to be added to this table. | | | | |


1/ $I_{GSSF1}$, $I_{GSSR1}$, and $I_{DSS1}$ was examined before and following SEE irradiation to determine acceptability for each bias condition. Other test conditions in accordance with table I, subgroup 2, may be performed at the manufacturer's option.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

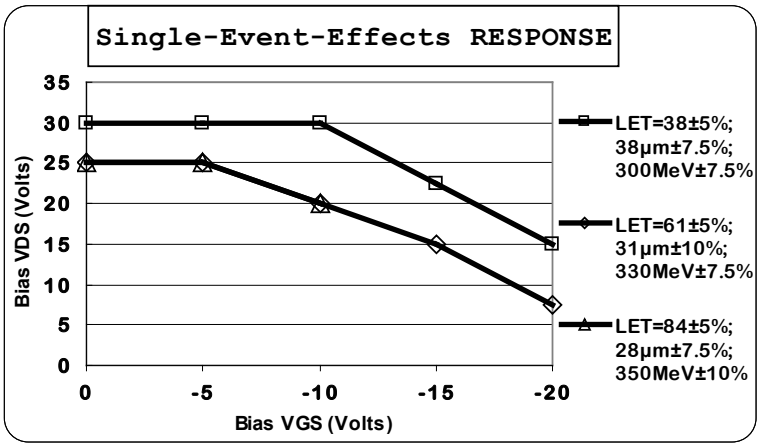


2N7482T3

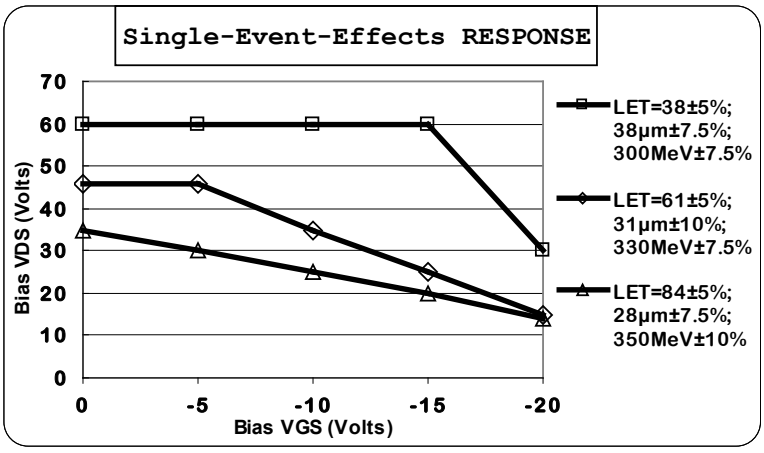


2N7483T3

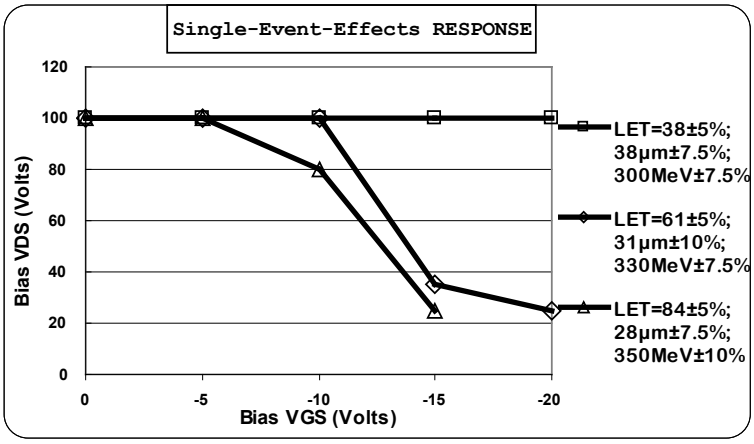


2N7484T3

FIGURE 5. Cage 69210 typical SEE response graphs.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.

6.9 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Weapons Support, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil.

6.10 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85
NASA - NA
DLA - CC

Review activity:
Air Force - 19

Preparing activity:
DLA - CC

(Project 5961-2025-089)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:58Z
Check the source to verify that this is the current version before use.