MIL-C-14876B(AR)
30 June 1981
SUPERSEDING
MIL-C-14876A(AR)
28 September 1973

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 10559335 and 11745329 -1600V POWER SUPPLIES

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Circuit Card Assembly: 10559335 -1600V Power Supply and the Circuit Card Assembly: 11745329 -1600V Power Supply which is the A1 component of the Electronics Unit, 11743131.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-STD-45662	Calibration System Requirements

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

DRAWINGS

ARRADCOM

10559335	Circuit Card Assembly: -1600V Power Supply
11745329	Circuit Card Assembly: -1600V Power Supply

Inspection Equipment

11750213	Test Set, Power Supply, High Voltage
11821457	Fixture Shock, Vertical and Horizontal
11821458	Shock Adapter - Plate Horz-Vert Plane/ Shock Z
11821647	Vibration/Shock Test Fixture

Packaging Data Sheet

P10559335	Packaging of Circuit Card Assembly: -1600V Power Supply

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The -1600V power supply circuit card assembly, herein referred to as the assembly, shall be manufactured in accordance with Drawing 10559335 or Drawing 11745329 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1)

3.1.1 Output. The assembly shall provide the following voltages:

	Voltage
a.	235 ± 25
b.	15 ± 1.2
c.	-1900 ± 200

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	73° ± 18°F
b.	Relative humidity	50 percent ± 30 percent
c.	Atmospheric pressure	28.5 + 2.0 −3.0 in. Hg.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power and signals.

Item	Condition	Characteristics	Connections
1.0	Loads		Connected between the following terminals:
1.1	Resistor	13 kilohms ± 5%	P1-25A and P1-16B
1.2	Resistor	3 megohms ± 5% 2500V (minimum)	P1-29A and P1-16B
1.3	Resistor	13 ohms ±5%	P1-7A and P1-16B
1.4	Capacitor	0.1 microfarad ± 20% (ceramic)	P1-7A and P1-16B
2.0	Power source	24 ± 2 Vdc	Applied between P1-4B and P1-16B
3.0	Signal source (transformer coupled signal)	Impedance of output voltage less than 1 ohm; open circuit voltage = 9 ± 1 Vdc p-p. Output voltage shall be a square wave; f = 10kHz ± 10%; rise and fall time shall be less than 2 microsec	Applied between P1-14B and P1-5A
4.0	Auxiliary equipment	See figure 1	Connected to terminals as specified on figure 1

3.3.1 Output voltage and ripple. The output voltage and ripple shall be as specified in table II, and the waveform at P1-1A shall be as shown on figure 2. (See 4.6.2)

TABLE II. Output voltage and ripple.

Output Terminal	Ripple (V p-p max)	Output Voltage
P1-25A (+200V)	15.0	235 ± 25V
P1-7A (+15V unfiltered)	0.9	15 ± 1.2V
P1-29A (-1600V)	5.0	-1900 ± 200V

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

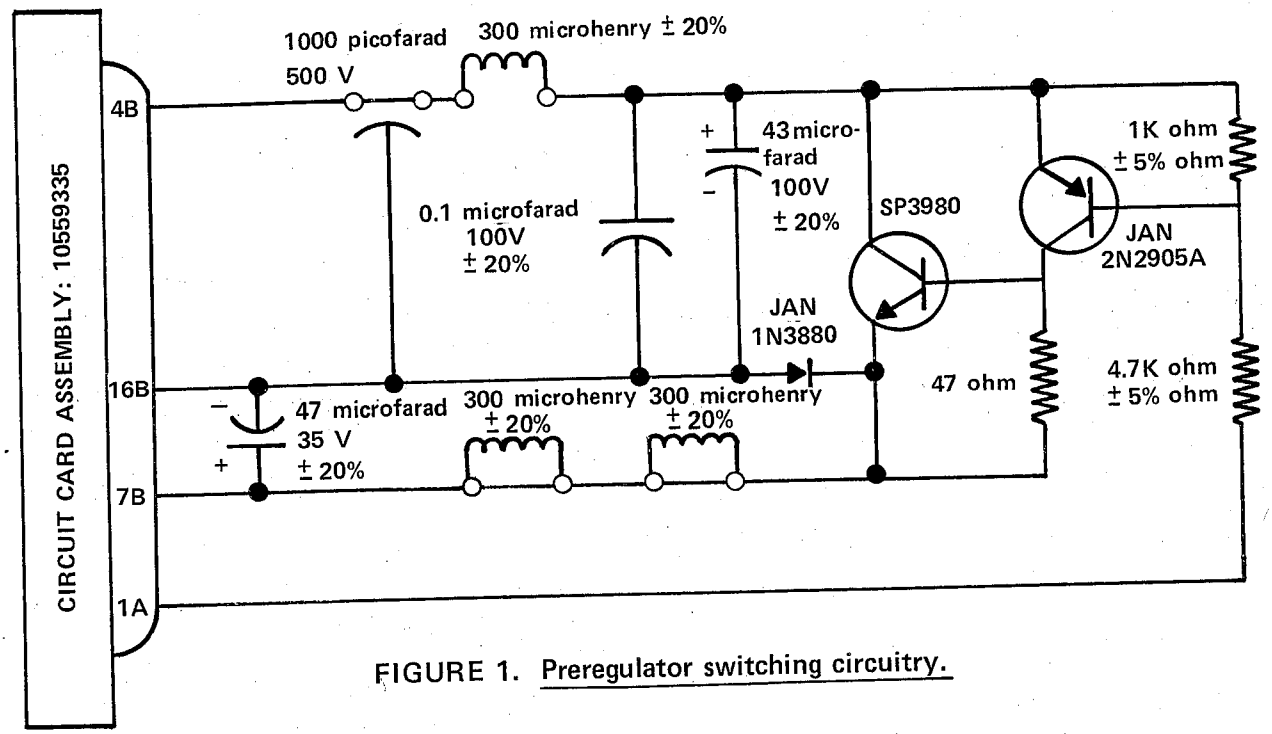


FIGURE 1. Preregulator switching circuitry.

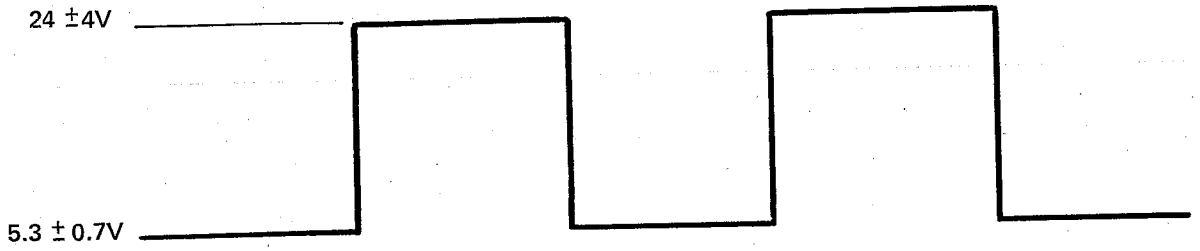


FIGURE 2. Voltage waveform at P1-1A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

3.4. Environmental.

3.4.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity units (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 1. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +140°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.4.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to +160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

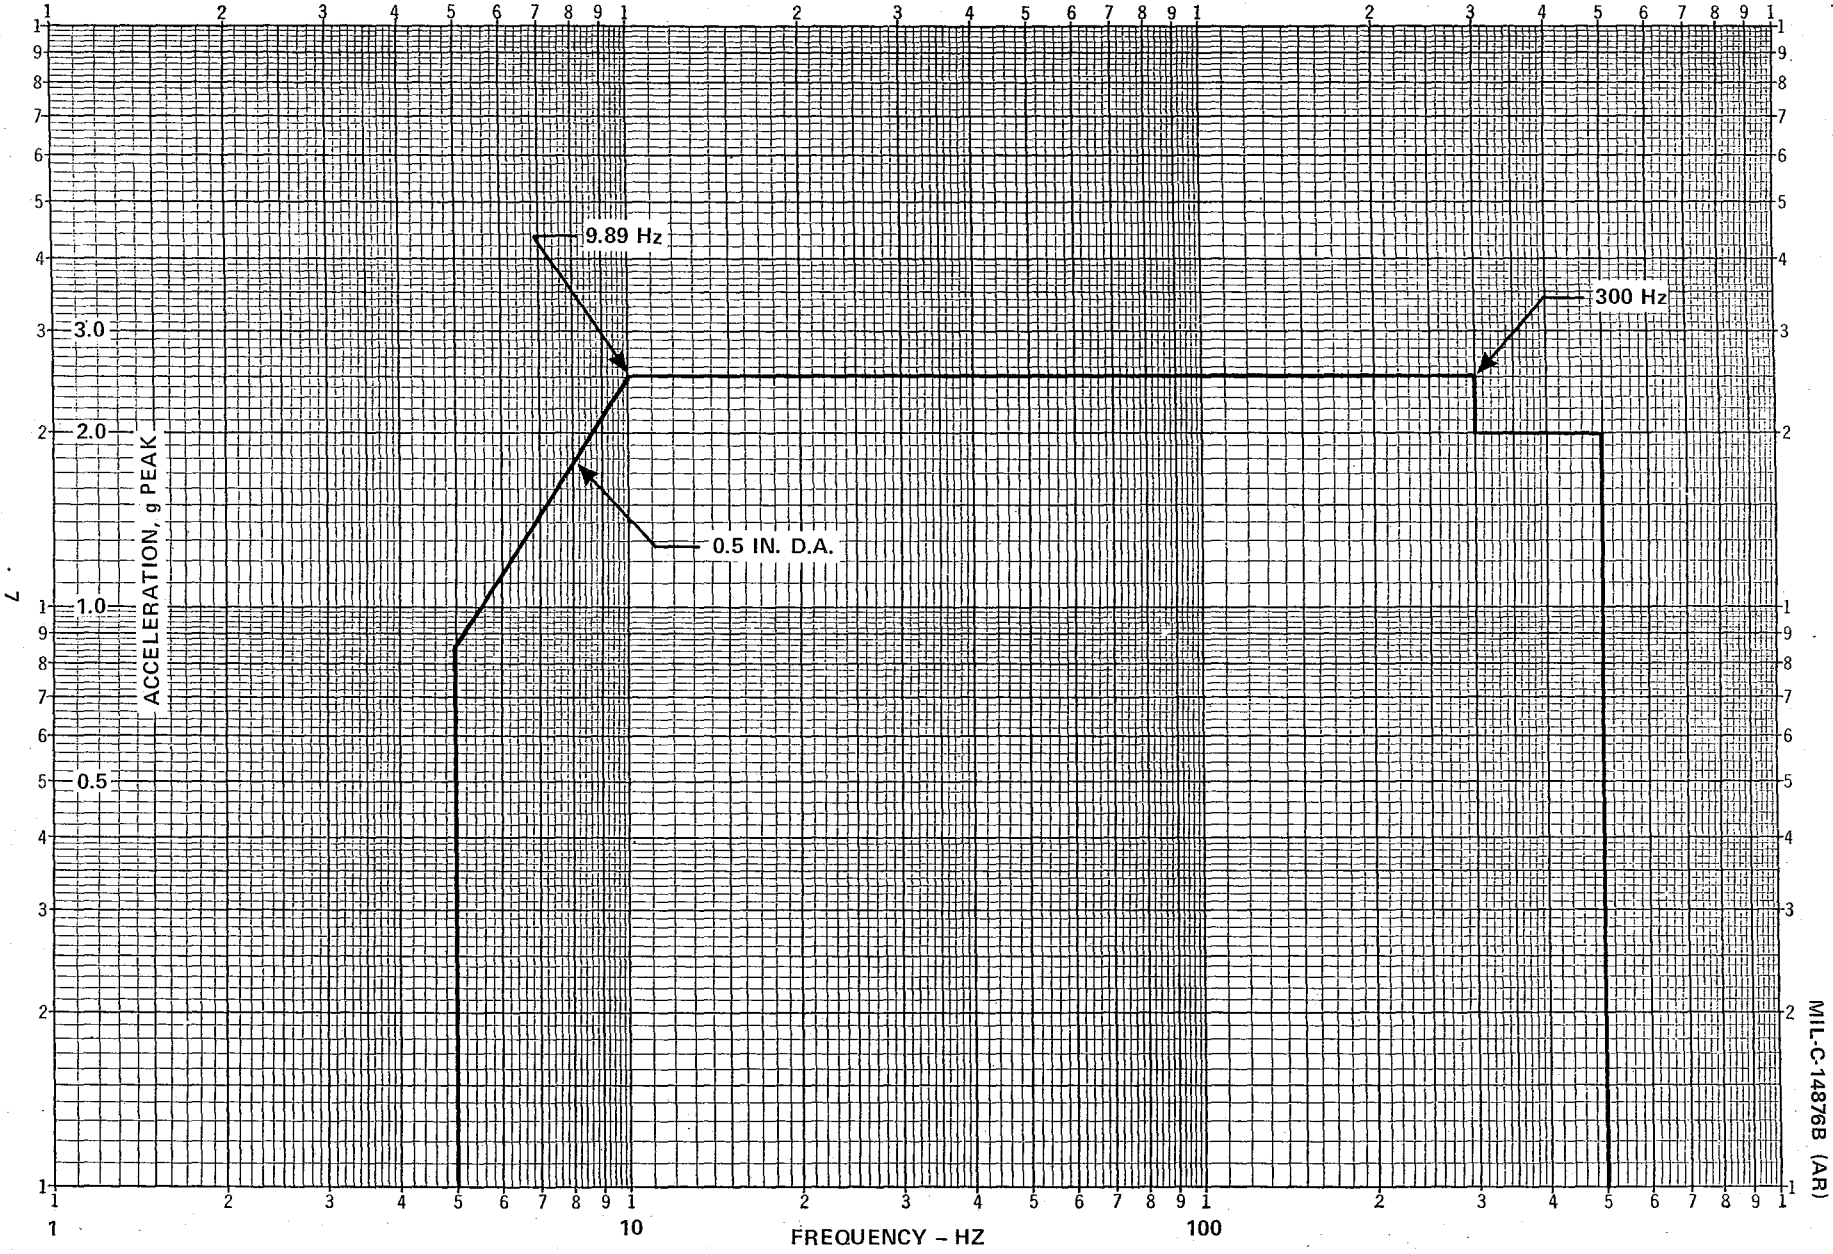


FIGURE 3. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables III, IV and V.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

	Use	Plan
a.	Logistics spare assembly apart from the next higher assembly	A and C
b.	Component assembly of the next higher assembly	B and C

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table IV.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table V shall be applied separately to each assembly in the sample.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table IV and only the test of item 307 in table V shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table III and shall be examined visually for completeness, improper assembly and evidence of poor workmanship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet P10559335.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

TABLE III. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Output Voltage and ripple	3.3.1	4.6.2.1

TABLE IV. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings-Visual
302	General specification	3.1.2	MIL-F-13926 - Visual

TABLE V. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.3.1
304	Vibration	3.4.2	4.6.3.2
305	High Temperature	3.4.3 and 3.4.4	4.6.3.3
306	Low Temperature	3.4.3 and 3.4.4	4.6.3.4
307	Temperature cycling	3.4.3 and 3.4.4	4.6.3.5

4.6 Methods of inspection.

4.6.1 Test equipment. Unless the assembly is procured apart from the next higher assembly, the test equipment in table VI shall be used where specified to perform the required test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

TABLE VI. Test equipment.

Item	Part Number	Nomenclature
1	11750213	Test Set, Power Supply, High Voltage
2	11821457	Fixture Shock, Vertical and Horizontal
3	11821458	Shock Adapter - Plate Horz-Vert Plane/Shock Z
4	11821647	Vibration/Shock Test Fixture

4.6.2 Performance tests.

4.6.2.1 Output voltage and ripple. Use item 1 of table VI or suitable equipment to determine compliance with 3.3.1.

4.6.3 Envirnmental tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Use items 2 and 4 of table VI or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure I, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 40 ± 4 g with a time duration of 18 ±3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table III.

4.6.3.1.2 High intensity. Use items 3 and 4 of table VI or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 100.0 ± 10.0 g with a time duration of 1.5 ± 0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table III.

4.6.3.2 Vibration. Vibration A as specified in 4.6.3.2.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.3.2.2 shall be conducted only for quality conformance inspection.

4.6.3.2.1 Vibration A. Use items 3 and 4 of table VI or mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, method 514.2 procedure VIII, except that the test level shall be the vibration curve shown in figure 3 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.


4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Use item 4 of table VI or suitable equipment and subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure I. The highest operating temperature shall be 140°F. The performance tests of table III shall be applied.

4.6.3.4 Low temperature. Use item 4 of table VI or suitable equipment and subject the assembly to the low temperature test specified in MIL-STD-810, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table III shall be applied.

4.6.3.5 Temperature cycling. With power and loads of table I applied, subject the assembly to the temperature profile specified in figure 4. At the conclusion of this test, subject the assembly to the performance tests of table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

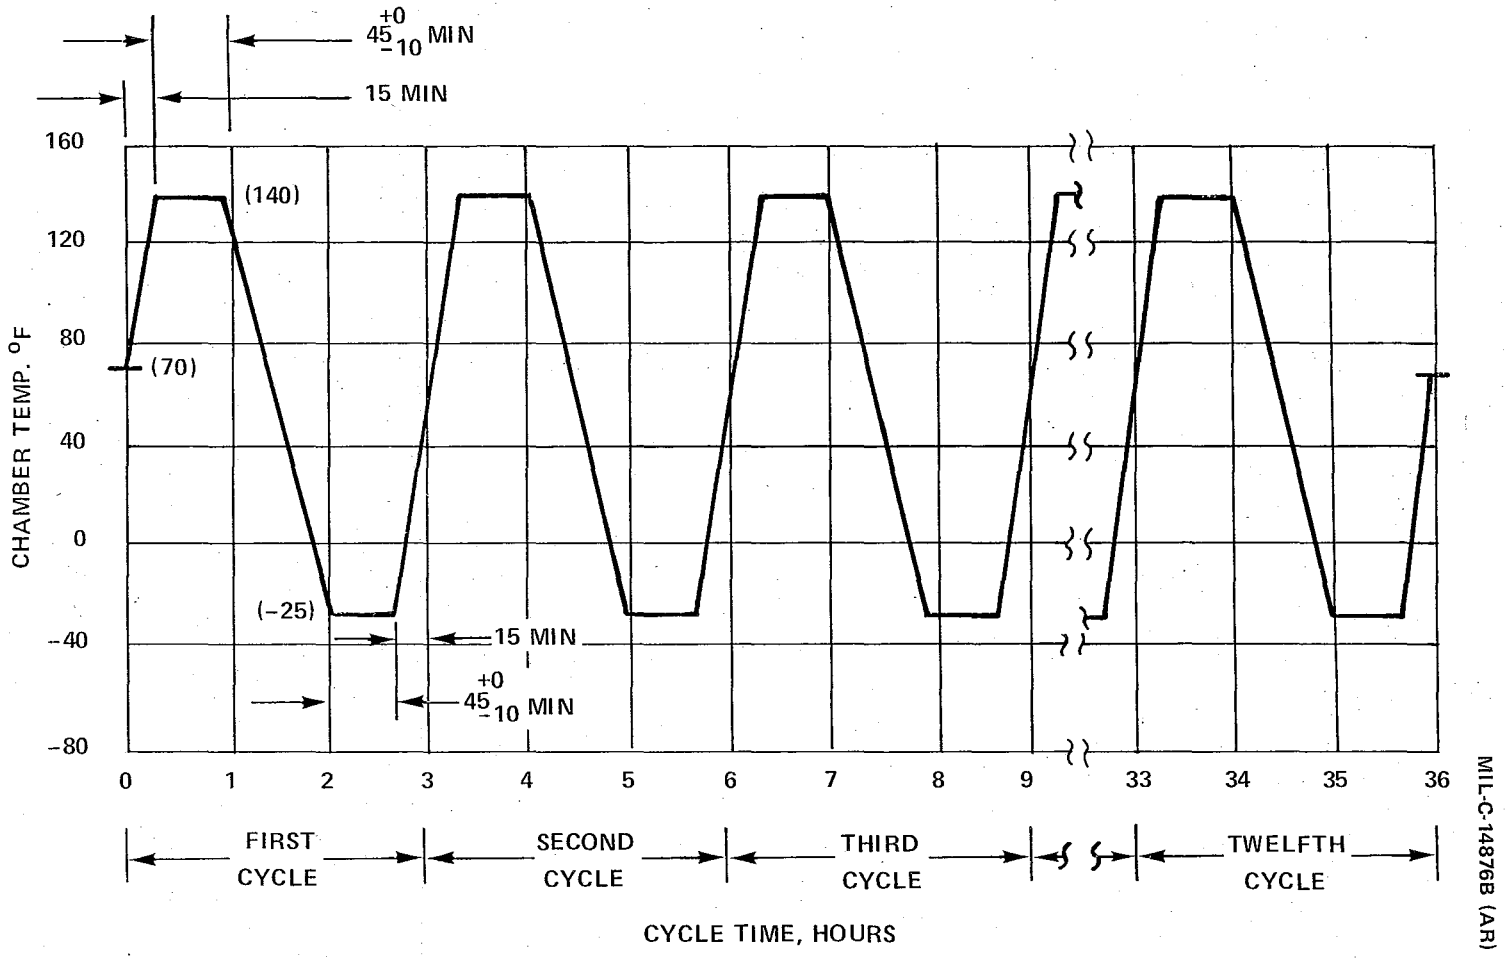

MIL-C-14876B (AR)

FIGURE 4. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P10559335. The level of protection shall be as specified in the procurement document. (see 4.5.6).

6. NOTES

6.1 Intended use. The assembly is a functional module of the Laser Receiver-Transmitter, intended for use in the Laser Range Finder AN/VVS-1. Its functions are as follows: (Common to AN/VVG-2 L.R.F.)

a. Converts the regulated 15 Vdc to -1600 Vdc for operation of the photomultiplier tube.

b. Provides 200 Vdc for biasing the display nixie tubes.

c. Provides sensing for the 15 Vdc regulator and the drive circuitry for the transistor switch.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Applicable packaging data sheet number (see 5.1).

c. Selection of applicable levels of preservation, packaging and packing.

d. Applicable stock number.

e. Requirement for first article submission.

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army - AR

Preparing activity:
Army - AR
Project No. 1240-A796

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:00Z
Check the source to verify that this is the current version before use.