MILITARY SPECIFICATION

COMPONENT ASSEMBLY: 10559479 TRANSMITTER

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defense.

WARNING - EYE HAZARD

EXTREME CAUTION MUST BE EXERCISED IN OPERATION AND TESTING THE ASSEMBLY. IF THE LASER LIGHT BEAM ENTERS THE HUMAN EYE, THE RETINA OF THE EYE CAN BE BURNED. THE HIGH ENERGY DENSITY OF THE BEAM CAN ALSO PRODUCE SUCH DAMAGE AT EXTREME RANGE AND BY REFLECTION FROM ANY SHINY SURFACE SUCH AS GLASS, METAL AND PAINT. IN VIEW OF THE POSSIBILITY OF PRODUCING SERIOUS EYE DAMAGE, THE ASSEMBLY SHOULD NOT BE OPERATED UNLESS THE TARGET AREA HAS BEEN EVACUATED.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Component Assembly: 10559479 Transmitter which is the A3 component of the Receiver-Transmitter Unit, 11743121.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC: 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-STD-45662	Calibration System Requirements

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

DRAWINGS

ARRADCOM

10559345	PFN Charge Power Supply
10559361	Pulse Forming Network
10559404	Transmitter Logic Component Assembly
10559425	Transmitter Logic Circuit Card Assembly
10559479	Transmitter Component Assembly

Inspection Equipment

11750210	Test Set - XMTR Q-Switch

Packaging Data Sheet

P10559479	Packaging of Component Assembly Transmitter: 10559479

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The transmitter component assembly, herein referred to as the assembly, shall be manufactured in accordance with Drawing 10559479 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1)

3.1.1 Function. The assembly shall provide the following functions:

	Designation	Nomenclature
a.	-2 volts	Magnetic pick-up output
b.	50 millijoules	Output energy
c.	1 megawatt	Peak power output
d.	370 microseconds	Laser output pulse timing

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	$73^{o} \pm 18^{o}F$
b.	Relative humidity	50 percent $\pm$ 30 percent
c.	Atmospheric pressure	28.5 + 2.0 -3.0 in. Hg.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specfied, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

3.3.1 Magnetic pickup output. With the power source of table I connected as specified, the magnetic pickup output voltage amplitude and waveform at J1-6 with respect to J1-5 shall be as specified in figure 1. (See 4.6.2.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

TABLE I. Power and auxiliary equipment.

Item	Condition	Characteristic		Connection
			Maximum peak-to-peak	
1.0	Power Source	Tolerance	(p-p) ripple	
1.1	+18 volts direct current (Vdc)	± 1 Vdc	100 millivolts (mV) p-p	Applied between J1-9 and J1-8 (return) when specified herein.
2.0	Auxiliary equipment			Connected as specified on figure 2 when specified herein.
2.1	Power supply	PFN charge: 10559345		
2.2	Transmitter logic	Circuit card assy: 10559425		
2.3	Transmitter logic	Assembly: 10559404		
2.4	Pulse-forming-network (PFN)	PFN: 10559361		
2.5	Power supply	+5 Vdc, 500 milliamperes (mA)		
2.6	Power supply	+15 Vdc, 100 mA		
2.7	Power supply	+24 ± 2 Vdc, 10 amperes (A)		
2.8	Power supply	-5 Vdc, 500 mA		
2.9	Switches (2)	Normally open		
2.10	Resistor	33K ± 5%, 1/2 watts (W)		

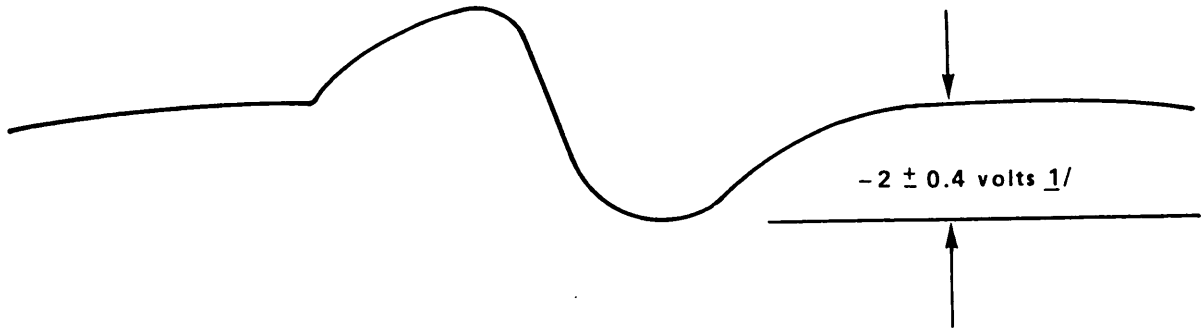


FIGURE 1. Magnetic pickup output.

1/ -2 ± 0.6 volts under the temperature extremes of 3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

3.3.2 Output energy. With the auxiliary equipment of table I connected as specified on figure 2, the output energy shall be 50 ± 5 millijoules (mj) with no multiple pulsing, at a PFN voltage not exceeding 1300 volts, when the assembly is fired. (See 4.6.2.2)

3.3.3 Peak power output. Under the conditions of 3.3.2, the peak optical output power shall be not less than one megawatt. (See 4.6.2.3)

3.3.4 Laser output pulse timing. When the assembly is fired, the time between flashtube activation and the laser output pulse shall be 370 ± 10 microseconds (ms). The transmitter logic assembly (10559425) used in the test position shall fire the flash tube when the Q-switch motor rotation period is 1.9 ± 0.4 milliseconds (msec). (See 4.6.2.4)

3.3.5 Thermistor check. With the assembly disconnected at P1, the thermistor resistance between connector pins J1-3 and J1-4 shall be as follows: (see 4.6.2.5)

a.	+72 ± 5°F	115K ± 25% ohms
b.	-40°F	3.3 ± 20% megohms
c.	+125°F	32.4K ± 20% ohms

3.4 Environmental.

3.4.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity unit (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 3. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +125°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.4.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to 160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

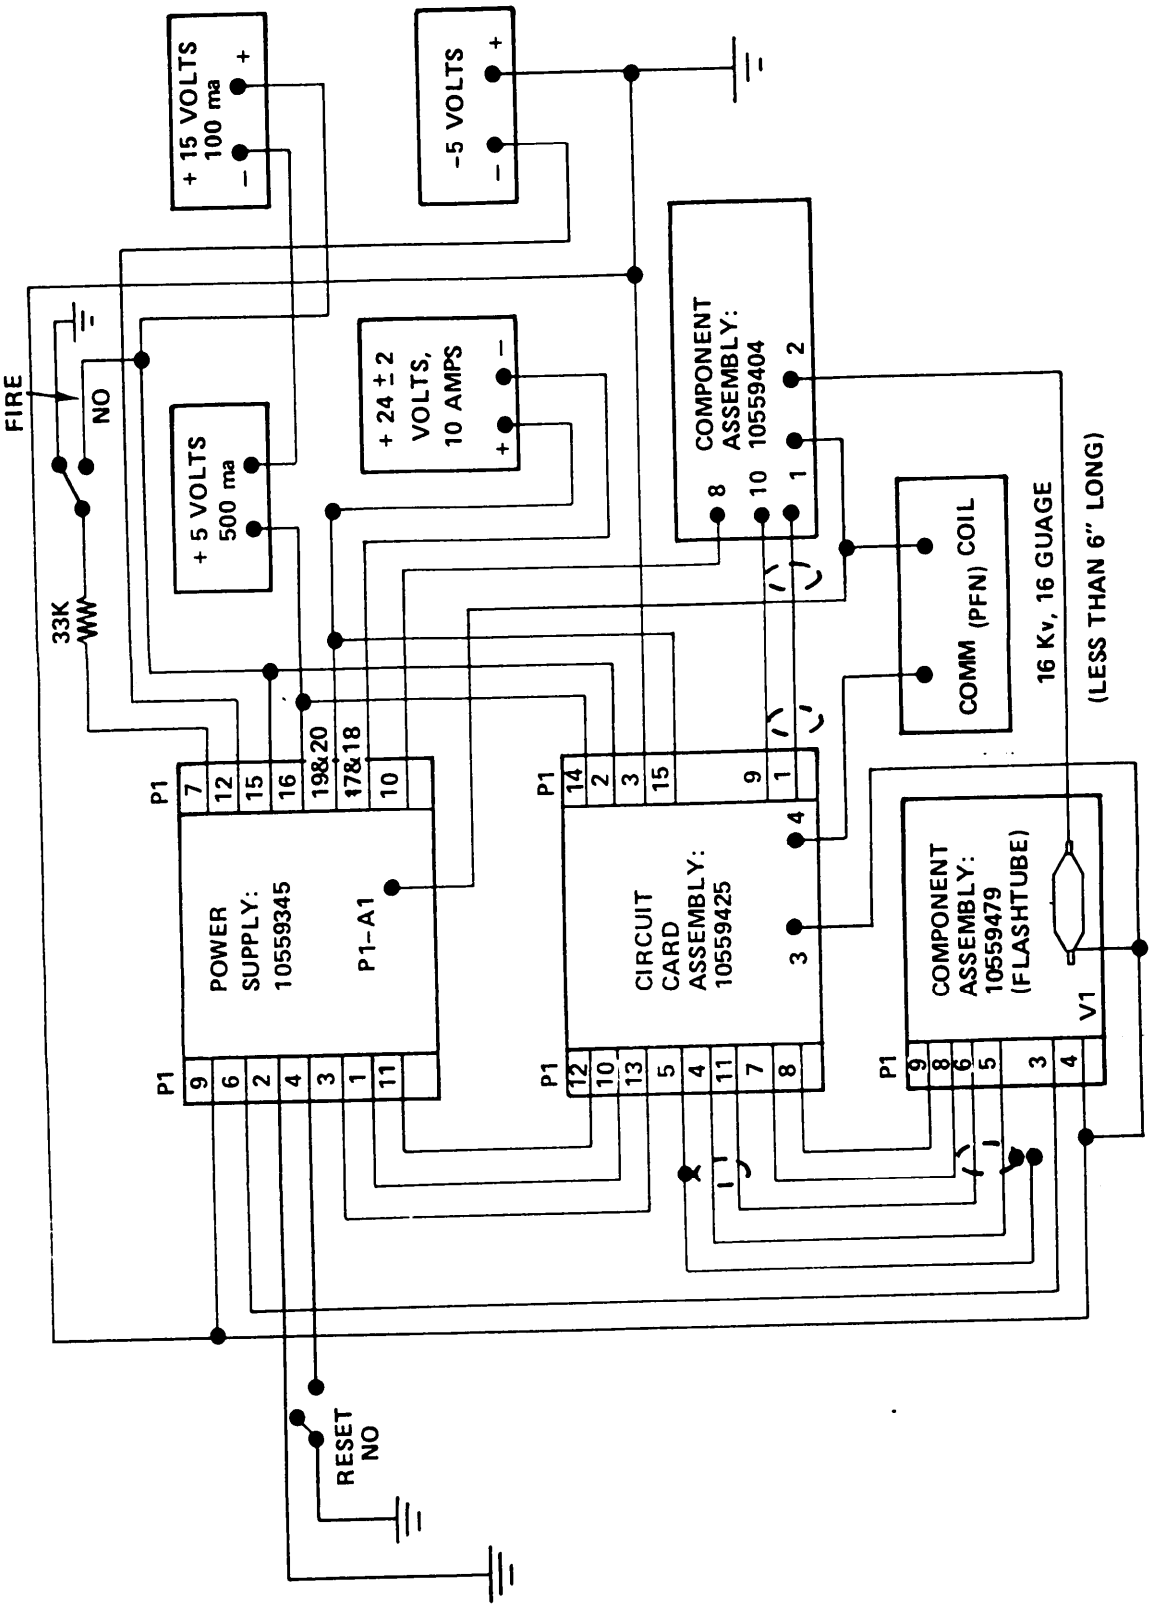


FIGURE 2. Wiring digram for assembly transmitter test.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:01Z
Check the source to verify that this is the current version before use.

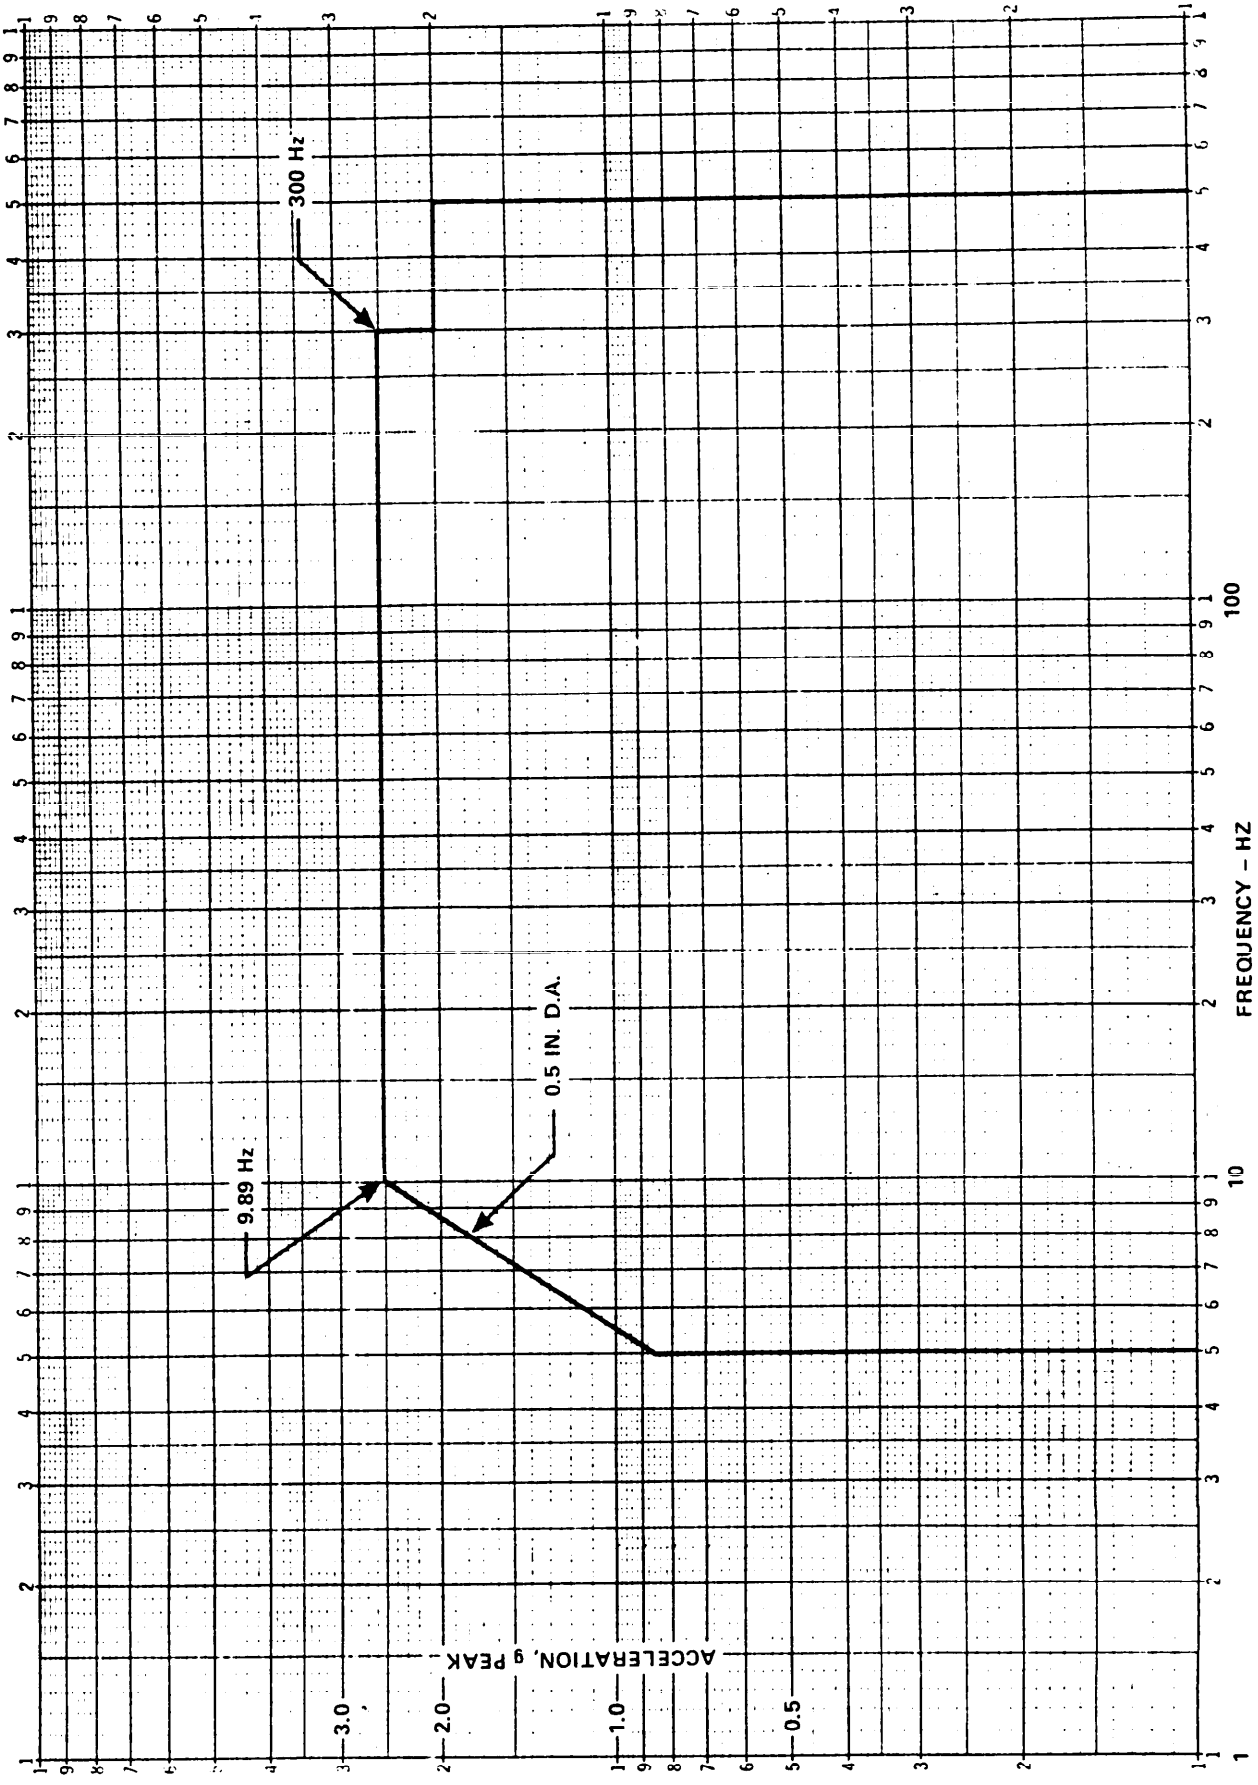


FIGURE 3. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

SAFETY PRECAUTIONS

These limitations are recommended for the protection of personnel against potential hazards from backscattered laser radiation:

1. Conduct no test in rain, snow or hail.

2. Equip all personnel using the rangefinder and all personnel in the vicinity with laser safety glasses of at least density 4 at 6943 angstroms when testing under these conditions:

   a. Morning twilight
   b. Evening twilight
   c. Daytime heavy fog where visibility is less than 200 meters

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (See 4.4).
2. Quality conformance inspection (See 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production aasemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables II, III and IV.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

	Use	Plan
a.	Logistics spare assembly apart from the next higher assembly	A and C
b.	Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table III.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table IV shall be applied separately to each assembly in the sample.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table III and only the test of item 307 in table IV shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table II and shall be examined visually for completeness, improper assembly and evidence of poor workmanship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet P10559479.

TABLE II. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Magnetic pickup output	3.3.1	4.6.2.1
102	Output energy	3.3.2	4.6.2.2
103	Peak power output	3.3.3	4.6.2.3
104	Laser output pulse timing	3.3.4	4.6.2.4
105	Thermistor check	3.3.5	4.6.2.5

TABLE III. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General specification	3.1.2	MIL-F-13926 - Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

TABLE IV. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.3.1
304	Vibration	3.4.2	4.6.3.2
305	High Temperature	3.4.3 and 3.4.4	4.6.3.3
306	Low Temperature	3.4.3 and 3.4.4	4.6.3.4
307	Temperature Cycling	3.4.3 and 3.4.4	4.6.3.5

4.6 Methods of inspection.

4.6.1 Test equipment. Unless the assembly is procured apart from the next higher assembly, the test equipment in table V shall be used where specified to perform the required test.

TABLE V. Test equipment.

Item	Part Number	Nomenclature
1	11750210	Test Set - XMTR Q-Switch

4.6.2 Performance tests.

4.6.2.1 Magnetic pickup output. Use item 1 of table V or suitable equipment to determine compliance with 3.3.1.

4.6.2.2 Output energy. Use item 1 of table V or suitable equipment to determine compliance with 3.3.2.

4.6.2.3 Peak power output. Use item 1 of table V or suitable equipment to determine compliance with 3.3.3.

4.6.2.4 Laser output pulse timing. Use item 1 of table V or suitable equipment to determine compliance with 3.3.4.

4.6.2.5 Thermistor check. Use item 1 of table V or suitable equipment to determine compliance with 3.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

4.6.3 Environmental tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure I figure 516.2-2. Assply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 40 ± 4 g with a time duration of 18 ± 3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table II.

4.6.3.1.2 High intensity. Mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 100.0 ± 10.0 g with a time duration of 1.5 ± 0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table II.

4.6.3.2 Vibration. Vibration A as specified in 4.6.3.2.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.3.2.2 shall be conducted only for quality conformance inspection.

4.6.3.2.1 Vibration A. Mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, method 514.2, procedure VII, except that the test level shall be the vibration curve shown in figure 3 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of table II.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure I. The highest operating temperature shall be 125°F. The performance tests of table II shall be applied.

4.6.3.4 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-810, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table II shall be applied.

4.6.3.5 Temperature cycling. With power and loads of table I applied, subject the assembly to the temperature profile specified in figure 4. At the conclusion of this test, subject the assembly to the performance tests of table II.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:01Z
Check the source to verify that this is the current version before use.

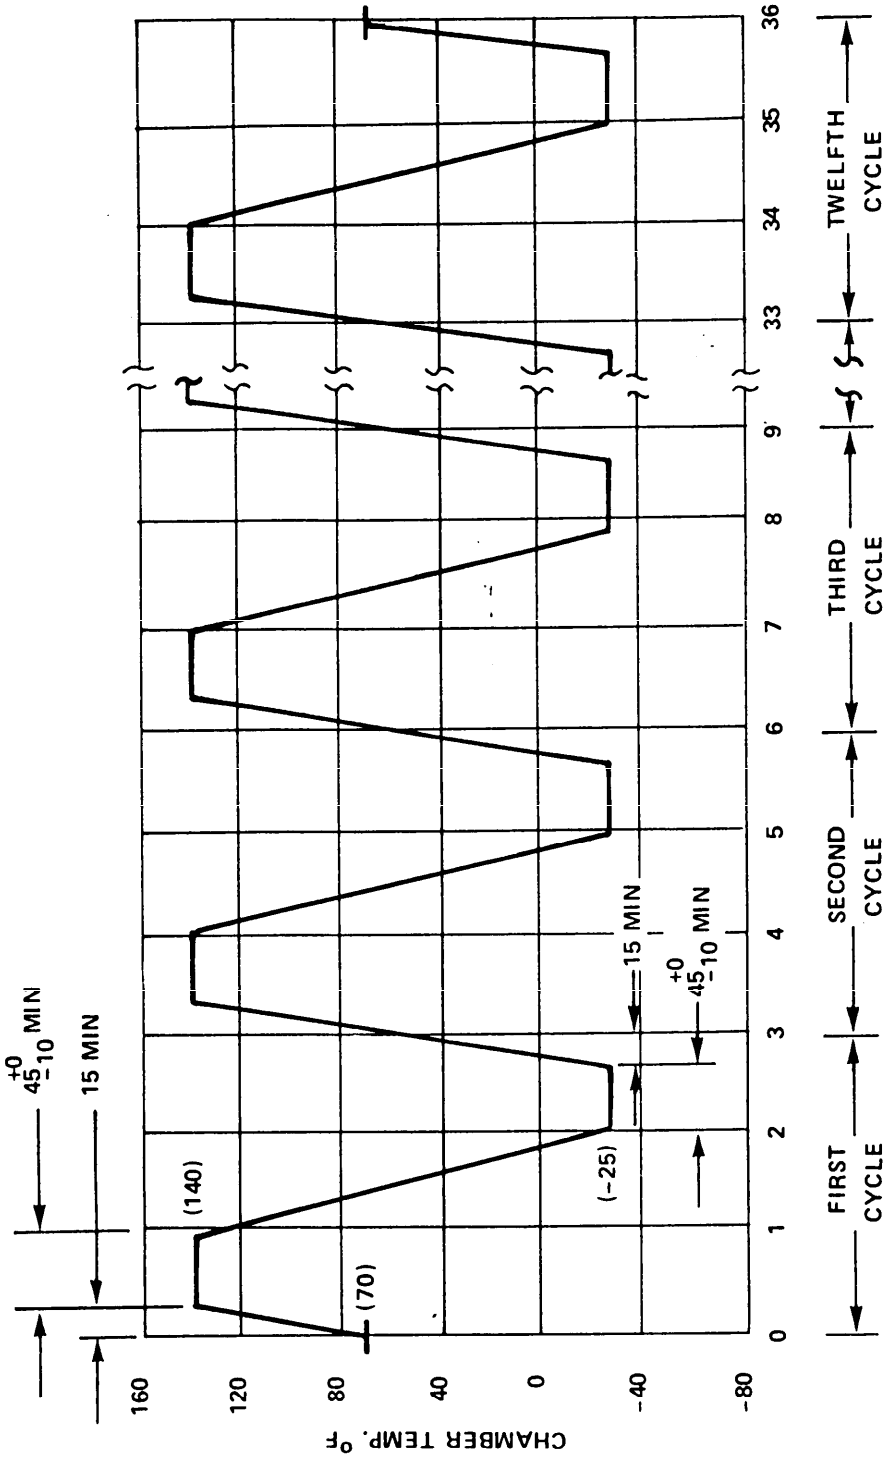


FIGURE 4. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P10559479. The level of protection shall be as specified in the procurement document. (See 4.5.6)

6. NOTES

6.1 Intended use. The assembly is an assembly of the Laser-Receiver Transmitter, intended for use in the Laser Range Finder AN/VVS-1. It contains the electronic and optical devices required to transmit the range finder's laser beam. (Common to AN/VVG-2 L.R.F.)

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Applicable packaging data sheet number (see 5.1).

c. Selection of applicable levels of preservation, packaging and packing.

d. Applicable stock number.

e. Requirement for first article submission.

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army - AR

Preparing Activity:
Army - AR
Project No. 1240-A792

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:01Z
Check the source to verify that this is the current version before use.