MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 10559305 COUNTERS

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Circuit Card Assembly: 10559305 Counters which is the A5 component of the Electronic Unit, 11743131.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-STD-45662	Calibration Systems Requirements

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC: 1240

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

DRAWINGS

ARRADCOM

10559305	Circuit Card Assembly - Counters

Inspection Equipment

11750202	Automatic Card and Unit - Test Set
11750433	Adapter Counters
11821458	Shock Adapter, Plate Vib Horz-Vert Plane/Shock Z
11821520	Automatic Test Assembly Central Processor Unit
11821647	Vibration/Shock Test Fixture

Packaging Data Sheet

P10559305	Packaging of Circuit Card Assembly - Counters: 10559305

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The counters circuit card assembly, herein referred to as the assembly, shall be manufactured in accordance with Drawing 10559305 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1)

3.1.1 Function. The assembly shall provide the following functions:

	Designation
a.	Counter reset
b.	Five-meter range signal
c.	Readout inhibit
d.	Counter 1
e.	Counter 2
f.	Counter 3
g.	Over range, minimum range and maximum range
h.	Malfunction 8
i.	Test range

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	73° ± 18°F
b.	Relative humidity	50 percent ± 30 percent
c.	Atmospheric pressure	28.5 + 2.0 −3.0 in. Hg.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power and signals.

Item	Condition	Characteristic	Connections
1.0	Loads		
1.1	Resistor	820 ohms ±5%	Connected between P1-31A and P1-15A
1.2	Resistor	430 ohms ±5%	Connected between P1-28B and P1-15A
1.3	Resistor	2.4 kilohms ±5%	Connected between P1-13A and P1-15A
1.4	Resistors(12)	3.0 kilohms ±5%	Connected to pins 1 through 12 (A or B, as applicable) of P1 with negative returns connected to P1-15A
1.5	Resistor	3.0 kilohms ±5%	Connected between P1-27A and P1-15A
1.6	Resistor	3.0 kilohms ±5%	Connected between P1-23A and P1-15A
2.0	Power source		
2.1	5 Vdc	Tolerance: ±0.2 Vdc Ripple: 25 mV p-p maximum	Connected between P1-15A(+) and P1-16B(-)
3.0	Signal source		
3.1	Digital type-A	Logical one: 4 ±1 Vdc Logical zero: 0.2 ± 0.2 Vdc Rise time (t_r): less than 100 nanoseconds (ns) Fall time (t_f): less than 100 ns Pulse width and repetition rate adjustment to meet input requirements	Applied to terminals as specified herein

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power and signals. - Continued

Item	Condition	Characteristic	Connections
3.2	Digital clock Pulse I	Logical one: 4 ±1 Vdc Logical zero: 0.2 ± 0.2 Vdc Frequency: 15 ±0.1 MHz Duty cycle: 50 ±5% t_r: less than 10 ns t_f: less than 10 ns	Applied to terminals as specified herein
3.3	Digital clock Pulse II	Logical one: 4.0 ± 1.0 Vdc Logical zero: 0.2 ± 0.2 Vdc Frequency: 1.5 ± 0.01 MHz Duty cycle: 50 ±5% t_r: less than 100 ns t_f: less than 100 ns	Applied to terminals as specified herein

3.3.1 Counter reset. With the digital type-A logical zero signal specified in table I applied to terminals P1-20B, P1-21A, P1-22B, and P1-29A, with respect to P1-16B, the voltage at the following terminals, referenced to P1-16B, shall be 4.2 ±1.0 Vdc.

a. P1-4B
b. P1-3A
c. P1-2B
d. P1-1A
e. P1-8B
f. P1-7A
g. P1-6B
h. P1-5A
i. P1-12B
j. P1-11A
k. P1-10B
l. P1-9A

3.3.2 Five-meter range signal. With the digital type-A signal of table I applied to the input terminals as specified in each item of table II, the output voltage at P1-13A shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:02Z
Check the source to verify that this is the currentversion before use.

TABLE II. Five-meter range signal.

Item	Input Pins of Terminal P1 1/						Output Voltage at Terminal P1-13A
	24B	22B	25A	21A	26B	20B	
1	1	0	NA	1	NA	1	0.2 ±0.2V
2	0	0	NA	1	NA	1	4.2 ±1.0V
3	NA	1	0	0	NA	1	4.2 ±1.0V
4	NA	1	1	0	NA	1	0.2 ±0.2V
5	NA	1	NA	1	0	0	4.2 ±1.0V
6	NA	1	NA	1	1	0	0.2 ±0.2V

1/ Legend: 1 = Logical one, type-A NA = Not applicable
2 = Logical zero, type-A

3.3.3 Readout inhibit. With the digital type-A logical one signal specified in table I applied to terminals P1-29A, P1-20B, P1-21A, and P1-22B and the digital clock pulse I signal specified in table I applied to P1-25A, P1-26B, and P1-24B, a voltage of 4.2 ±1.0 Vdc shall be present at the following tsrminals:

a. P1-9A
b. P1-10B
c. P1-11A
d. P1-12B
e. P1-5A
f. P1-6B
g. P1-7A
h. P1-8B
i. P1-1A
j. P1-2B
k. P1-3A
l. P1-4B

3.3.4 Counter 1. With the digital type-A signal of table I applied to the input terminals as indicated below, Counter 1 shall perform as specified.

Input Terminals	Type-A Signal
P1-29A	Logical one
P1-20B	Logical one
P1-21A	Logical one
P1-22B	Logical zero

3.3.4.1 Tens-counter. With digital clock pulse II signals of table I applied to P1-24B, the output waveforms shown on figure 1, referenced to the input clock pulses, shall appear at the specified terminals.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

3.3.4.2 Hundreds-counter. With the digital clock pulse I signal of table I applied to P1-24B, the output waveforms shown on figure 2 as referenced to the P1-9A output shall appear at the specified terminals.

3.3.4.3 Thousands-counter. With the digital clock pulse I signal of table I applied to P1-24B, the output waveforms shown on figure 3 as referenced to the P1-5A output shall appear at the specified terminals.

3.3.5 Counter 2. With the digital type-A signal of table I applied to the input terminals as indicated below, Counter 2 shall perform as specified.

Input Terminals	Type-A Signal
P1-29A	Logical one
P1-20B	Logical one
P1-21A	Logical zero
P1-22B	Logical one

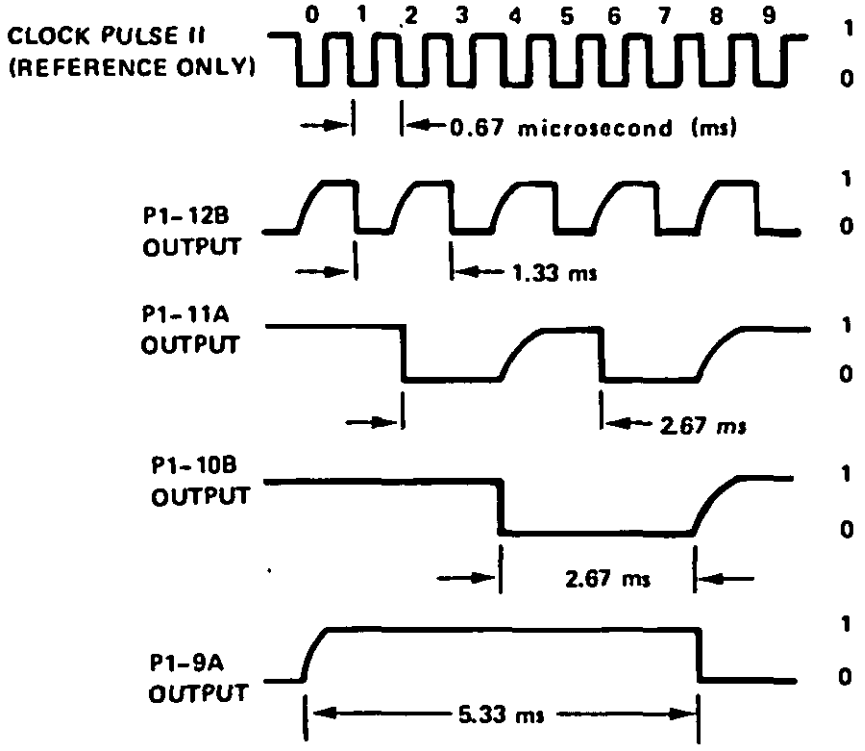


FIGURE 1. Tens-counter waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

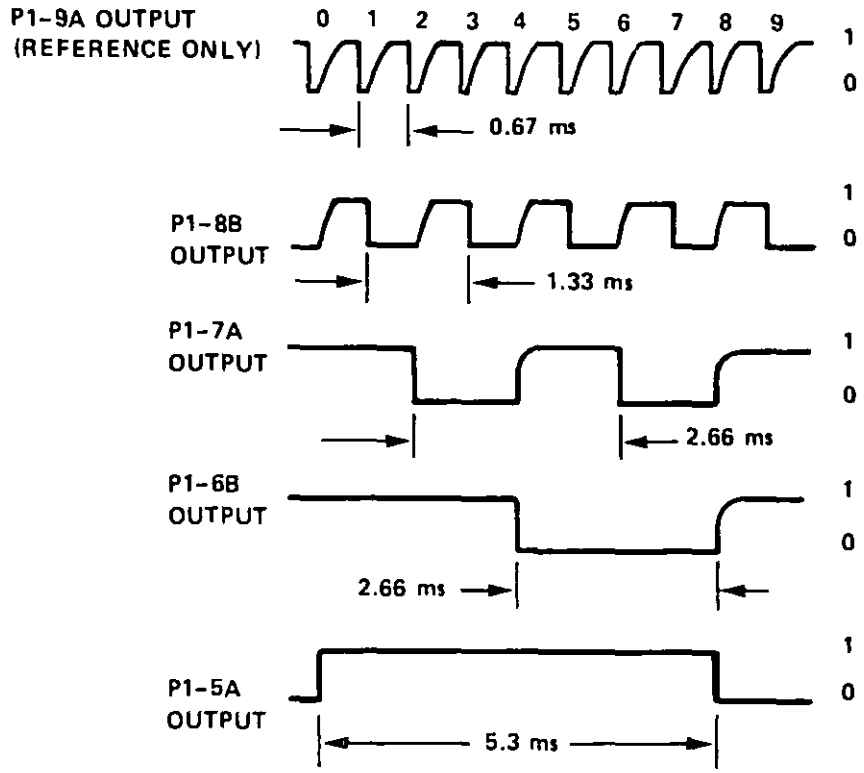


FIGURE 2. Hundreds-counter waveforms.

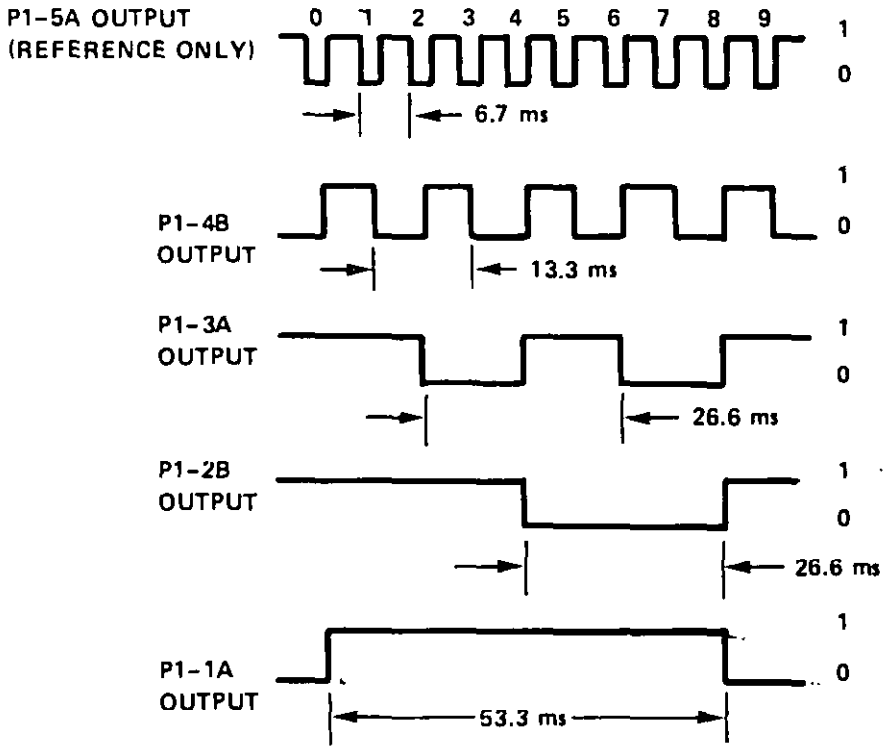


FIGURE 3. Thousands-counter waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

3.3.5.1 Tens-counter. With the digital clock pulse II signal of table I applied to P1-25A, the output waveforms shown on figure 1, referenced to the input clock pulses, shall appear at the specified terminals.

3.3.5.2 Hundreds-counter. With the digital clock pulse I signal of table I applied to P1-25A, the output waveforms shown on figure 2 as referenced to the P1-9A output shall appear at the specified terminals.

3.3.5.3 Thousands-counter. With the digital clock pulse I signal of table I applied to P1-25A, the output waveforms shown on figure 3 as referenced to the P1-5A output shall appear at the specified terminals.

3.3.6 Counter 3. With the digital type-A signal of table I applied to the input terminals as indicated below, Counter 3 shall perform as specified.

Input Terminals	Type-A Signal
P1-29A	Logical one
P1-20B	Logical zero
P1-21A	Logical one
P1-22B	Logical one

3.3.6.1 Tens-counter. With the digital clock pulse II signal of table I applied to P1-26B, the output waveforms shown on figure 1, referenced to the input clock pulses, shall appear at the specified terminals.

3.3.6.2 Hundreds-counter. With the digital clock pulse I signal of table I applied to P1-26B, the output waveform shown on figure 2 as referenced to the P1-9A output shall appear at the specified terminals.

3.3.6.3 Thousands-counter. With the digital clock pulse I signal of table I applied to P1-26B, the output waveforms shown on figure 3 as referenced to the P1-5A output shall appear at the specified terminals.

3.3.7 Over range, minimum range, maximum range. With the digital type-A signal of table I applied to the input terminals as indicated below, and the digital clock pulse I signal of table I applied to terminal P1-26B, the output waveforms shown on figure 4, referenced to the input clock pulses, shall appear at the specified terminals.

Input Terminals	Type-A Signal
P1-29A	Logical one
P1-20B	Logical zero
P1-21A	Logical one
P1-22B	Logical one

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the currentversion before use.

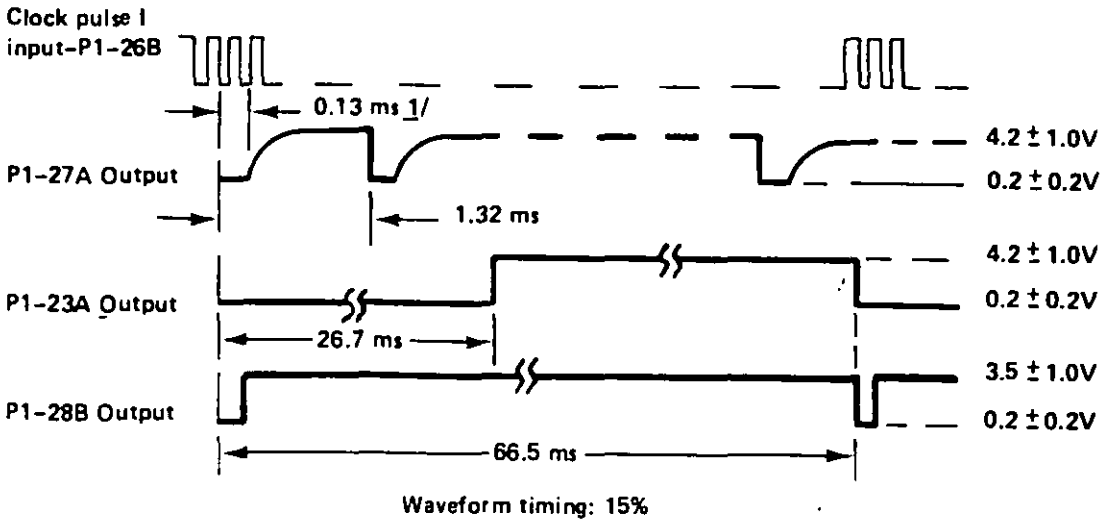


FIGURE 4. Over range, minimum range and maximum range waveforms.

1/ The 0.13 ms period refers to the P1-27A output.

3.3.8 Test range. With the digital type-A signal of table I applied to the input terminals as indicated below, and the digital clock pulse I signal of table I applied to terminal P1-26B, the output waveform shown on figure 5, referenced to the iniput clock pulses, shall appear at the specified terminal.

Input Terminals	Type-A Signal
P1-29A	Logical one
P1-34B	Logical zero

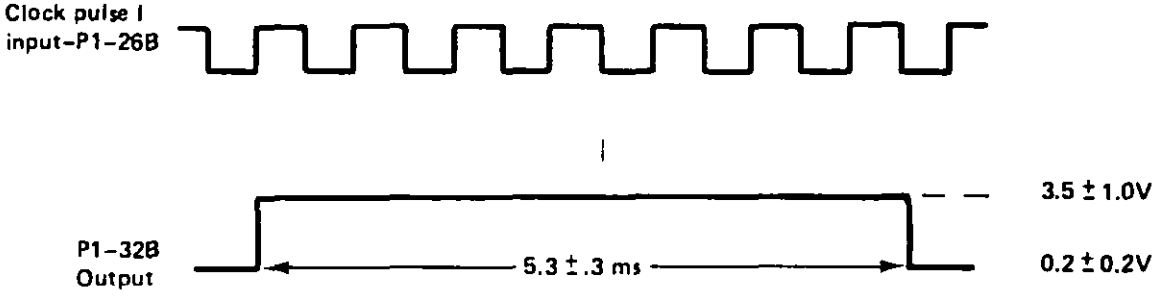


FIGURE 5. Clock pulse I input/output voltage.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the currentversion before use.

3.3.9 Malfunction 8.

3.3.9.1 Condition 1. With the type-A signal of table I, adjusted as shown in figure 6 and applied to the indicated input terminals, the output waveform shown on figure 6 shall appear at the specified terminal.

3.3.9.2 Condition 2. With the digital type-A and clock pulse I signals of table I, shown on figure 7, applied to the indicated input terminals, the output waveform shown on figure 7 shall appear at the specified terminal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

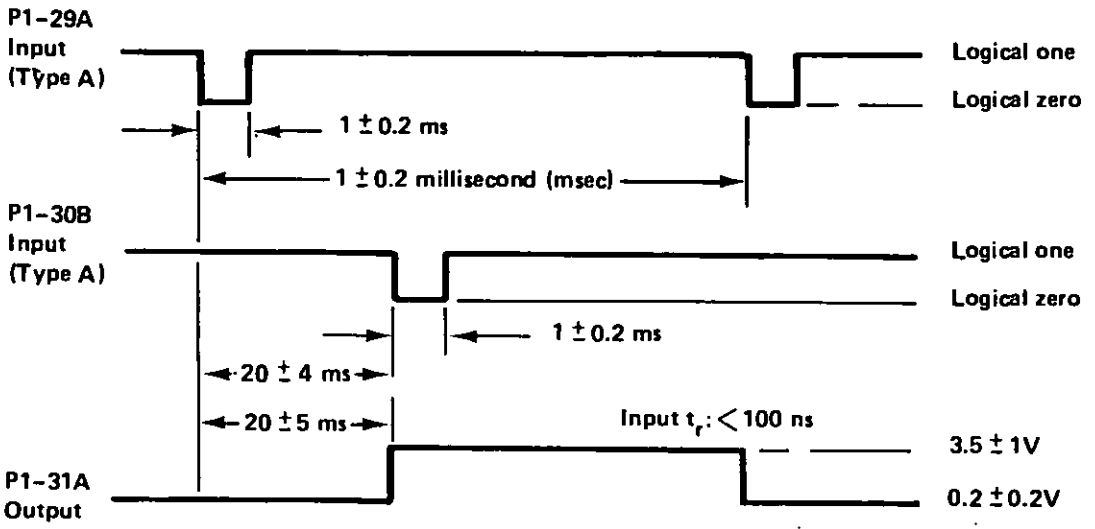


FIGURE 6. Malfunction 8, condition 1 waveform.

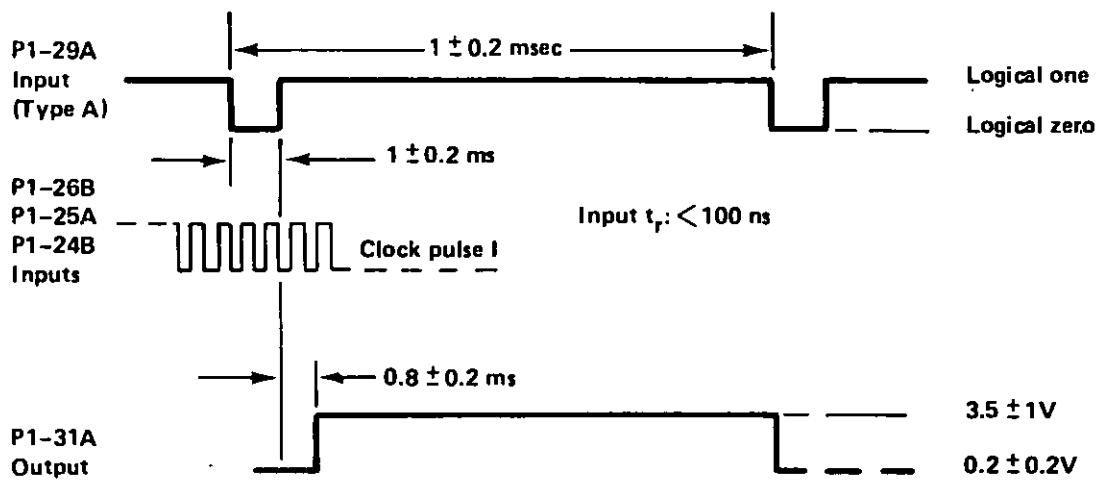


FIGURE 7. Malfunction 8, condition 2 waveforms.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

3.4 Environmental.

3.4.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity units (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 8. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +140°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.4.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to +160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

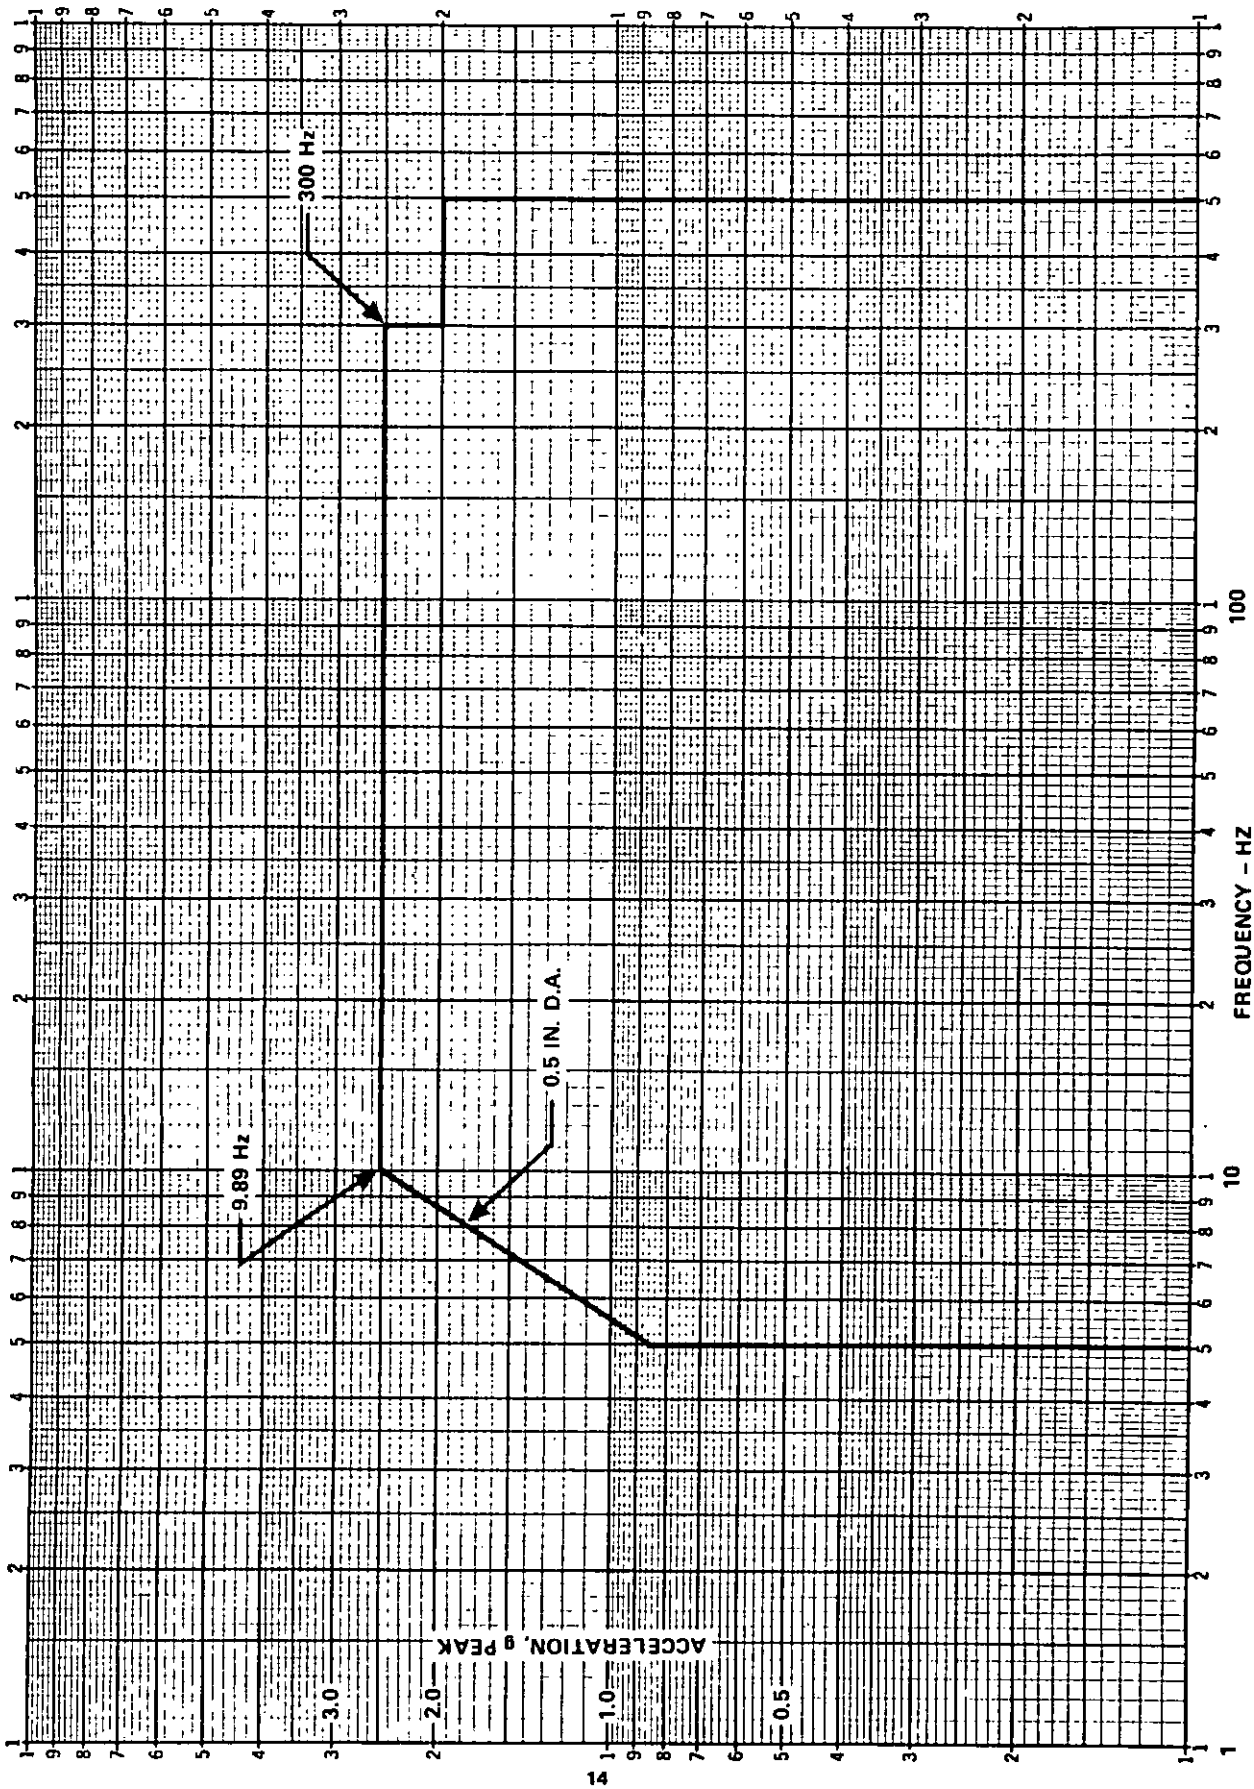


FIGURE 8. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables III, IV and V.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

TABLE III. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Counter reset	3.3.1	4.6.2.1
102	Five-meter range signal	3.3.2	4.6.2.2
103	Readout inhibit	3.3.3	4.6.2.3
104	Counter 1	3.3.4	4.6.2.4
105	Counter 2	3.3.5	4.6.2.5
106	Counter 3	3.3.6	4.6.2.6
107	Over range, minimum range, maximum range	3.3.7	4.6.2.7
108	Test range	3.3.8	4.6.2.8
109	Malfunction 8	3.3.9	4.6.2.9

TABLE IV. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General Specification	3.1.2	MIL-F-13926 - Visual

TABLE V. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.3.1
304	Vibration	3.4.2	4.6.3.2
305	High Temperature	3.4.3 and 3.4.4	4.6.3.3
306	Low Temperature	3.4.3 and 3.4.4	4.6.3.4
307	Temperature Cycling	3.4.3 and 3.4.4	4.6.3.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

Use	Plan
a. Logistics spare assembly apart from the next higher assembly	A and C
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table IV.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table V shall be applied separately to each assembly in the sample.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table IV and only the test of item 307 in table V shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table III and shall be examined visually for completeness, improper assembly and evidence of poor workmanship.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet P10559305.

4.6 Methods of inspection.

4.6.1 Test equipment. Unless the assembly is procured apart from the next higher assembly, the test equipment in table VI shall be used where specified to perform the required test.

TABLE VI. Test equipment.

Item	Part Number	Nomenclature
1	11750202	Automatic Card and Unit-Test Set
2	11750433	Adapter, Counters
3	11821458	Shock Adapter, Plate Vib Horz-Vert Plane/Shock Z
4	11821520	Automatic Test Assembly Central Processor Unit
5	11821647	Vibration/Shock Test Fixture

4.6.2 Performance tests.

4.6.2.1 Counter reset. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.1.

4.6.2.2 Five-meter range signal. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.2.

4.6.2.3 Readout inhibit. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.4.

4.6.2.4 Counter 1. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

4.6.2.5 Counter 2. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.5.

4.6.2.6 Counter 3. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.6.

4.6.2.7 Over range, minimum range, maximum range. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.7.

4.6.2.8 Test range. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.8.

4.6.2.9 Malfunction 8. Use items 1, 2 and 4 of table VI or suitable equipment to determine compliance with 3.3.9.

4.6.3 Environmental tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design., Use item 5 of table VI or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure I, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 40 ±4 g with a time duration of 18 ±3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table III.

4.6.3.1.2 High intensity. Use items 5 and 3 of table VI or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 100.0 ±10.0 g with a time duration of 1.5 ±0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table III.

4.6.3.2 Vibration. Vibration A as specified in 4.6.3.2.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.3.2.2 shall be conducted only for quality conformance inspection.

4.6.3.2.1 Vibration A. Use items 5 and 3 of table VI or mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, method 514.2 procedure VIII, except that the test level shall be the vibration curve shown in figure 8 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Use item 5 of table VI or suitable equipment and subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure I. The highest operating temperature shall be 140°F. The performance tests of table III shall be applied.

4.6.3.4 Low temperature. Use item 5 of table VI or suitable equipment and subject the assembly to the low temperature test specified in MIL-STD-810, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table III shall be applied.

4.6.3.5 Temperature cycling. With power and loads of table I applied, subject the assembly to the temperature profile specified in figure 9. At the conclusion of this test, subject the assembly to the performance tests of table III.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

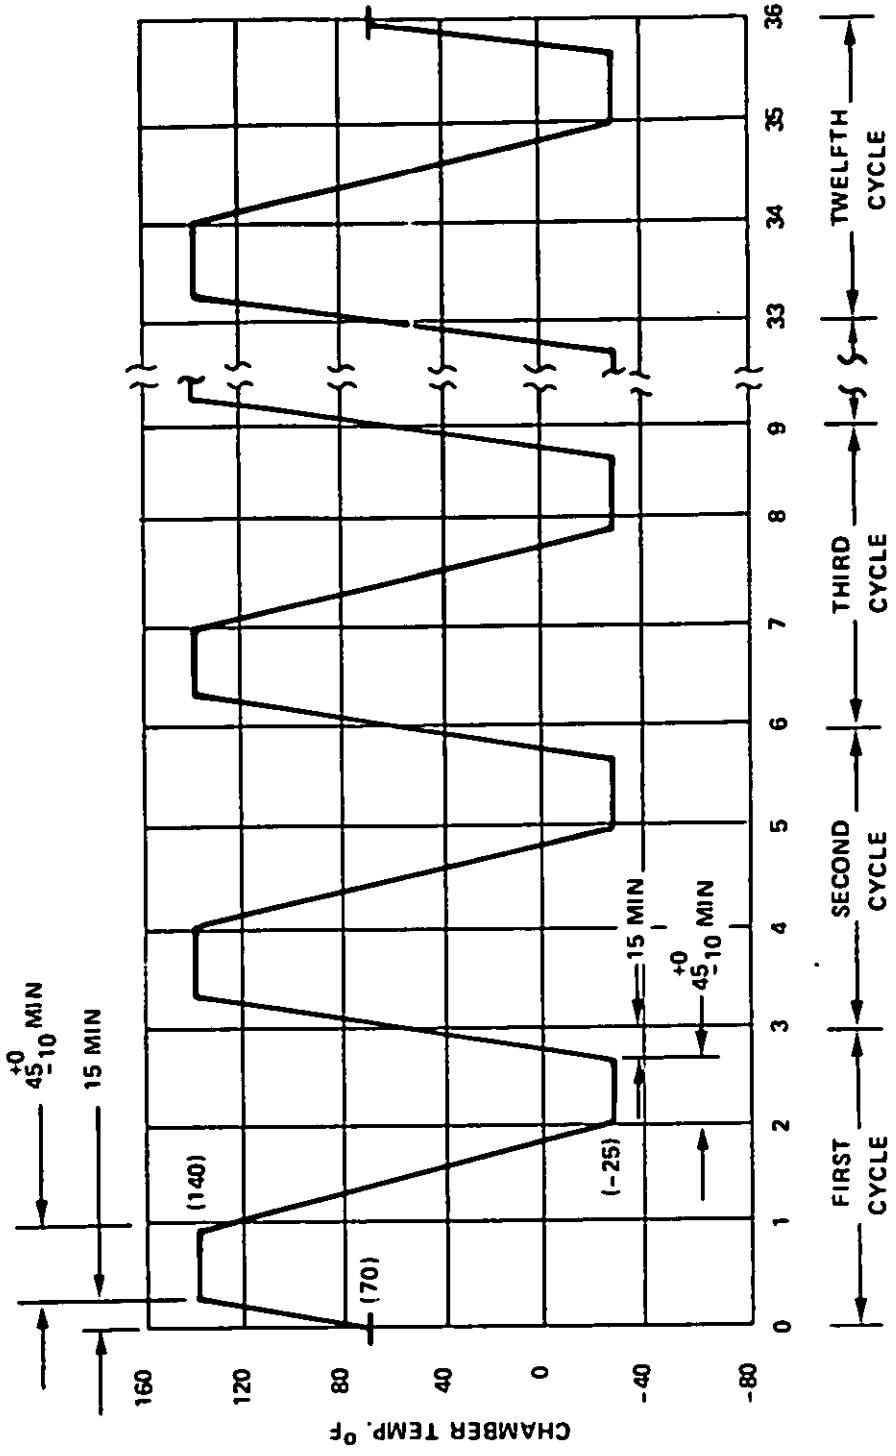


FIGURE a. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P10559305. The level of protection shall be as specified in the procurement document. (See 4.5.6)

6. NOTES (Common to AN/VVG-2 L.R.F.)

6.1 Intended use. The circuit card assembly is a functional module of the Laser Transmitter/Receiver, intended for use in the Laser Range Finder AN/VVS-1. The circuit card assembly incorporates most of the circuitry needed to count the clock pulses during the interval between the transmission of the laser pulse and detection of a reflected signal. The circuit card assembly consists of three counters, each having three decades. In addition to the counters, the circuit card assembly contains the gating necessary to combine the outputs of the three counters so that any one counter can be read out.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Applicable packaging data sheet number (see 5.1).

c. Selection of applicable levels of preservation, packaging and packing.

d. Applicable stock number.

e. Requirement for first article submission.

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing Activity
Army-AR
Project No. 1240-A795

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:02Z
Check the source to verify that this is the current version before use.