INCH-POUND

MIL-C-11430E
15 November 1991
SUPERSEDING
MIL-C-11430D
31 December 1985

MILITARY SPECIFICATION

CASE, MILITARY WATER CAN, INSULATED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers an insulated case (military water can), fabricated from vinyl coated cotton cloth.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5017 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
L-P-375	-	Plastic Film, Flexible, Vinyl Chloride
V-F-106	-	Fastener, Slide, Interlocking
V-T-285	-	Thread, Polyester
FF-R-556	-	Rivet, Solid, Small; Rivet, Split, Small; Rivet Tubular, Small; Flat Washer (Burr); and Cap, Rivet; General Purpose
FF-S-111	-	Screw, Wood
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths
DDD-L-20	-	Label: for Clothing, Equipage, and Tentage, (General Use)
MMM-A-1617	-	Adhesive, Rubber Base, General Purpose
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-496	-	Clips, End, Strap
MIL-W-530	-	Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-C-10799	-	Cloth, Coated, Cotton, Vinyl Coated, Fire and Mildew Resistant
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personnel Equipment and Equipage; General Specification For

STANDARDS

FEDERAL

FED-STD-595	-	Colors Used in Government Procurement
FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

2-2-127	-	Case, Military Water Can; Assemblies and Illustration
2-2-128	-	Sections "A"
2-2-129	-	Sections "B"
2-2-130	-	Details "A"
2-2-131	-	Details "B"
2-2-132	-	Details "C"
2-2-133	-	Details "D"
2-2-134	-	Details "E"
2-2-135	-	Base Assembly Details

* (Copies of drawings are available from the U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-UX, Natick, MA 01760-5017.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 1518 - Standard Test Method for Thermal Transmittance of Textile Fabric and Batting Between Guarded Hot-Plate and Cool Atmosphere
D 2016 - Standard Test Methods for Moisture Content of Wood
D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

* AMERICAN NATIONAL STANDARD/AMERICAN HARDBOARD ASSOCIATION (ANSI/AHA)

A 135.4 - Basic Hardboard

(Copies should be obtained from the American Hardboard Association, 520 North Hicks Road, Palatine, IL 60067.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets, or MS standards), the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

* 3.2 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

* 3.2.1 Cloth, coated, cotton, vinyl coated. The cloth shall be dyed either desert tan shade No. 33446 or olive drab shade No. 34088 as specified (see 6.2). Color shade numbers shall be selected from and in accordance with FED-STD-595. Cloth shall conform to type II, class 1 of MIL-C-10799.

* 3.2.2 Webbing, textile, cotton. Unless otherwise specified (see 6.2), webbing shall be dyed the same shade as the color selected for the cloth. The webbing shall conform to type III, class 4, 1-1/2 and 2 inch widths of MIL-W-530.

* 3.2.3 Thread, polyester. Unless otherwise specified (see 6.2), the thread shall be dyed the same shade as the color selected for the cloth and webbing. The thread shall conform to type I, class 1, sub-class B, size FF of V-T-285. The thread shall show "good" colorfastness to chlorine bleaching.

3.2.4 Adhesive.

3.2.4.1 Water dispersed. Adhesive used to bond the flexible vinyl plastic film to the glass fiber insulation shall be synthetic rubber water dispersion cement.

3.2.4.2 Solvent dispersed. Adhesive used to bond together the flexible waterproof film where it is lapped and joined shall be a rubber adhesive conforming to type III of MMM-A-1617.

* 3.2.5 Hardboard. Hardboard shall be 1/8 inch thick conforming to ANSI/AHA A 135.4, class 2 standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

3.2.6 Film, vinyl plastic, flexible. The film shall be 0.0040 inch thick conforming to type I, class 1 of L-P-375.

3.2.7 Insulation. The insulating material shall be composed of glass fibers firmly bonded with a thermosetting plastic resin into a resilient mat structure 1 inch thick (+ 3/4 inch, - 0) having a weight of 2.1 pounds (± 10 percent) per 24 square feet when tested as specified in 4.4.1.1. The heat transmission value for the insulation, together with one thickness on each side of the flexible vinyl plastic film specified in 3.2.6, and the vinyl coated cloth specified in 3.2.1, shall not exceed 0.21 Btu per hour, per square foot, per degree Fahrenheit, taken at a mean temperature of 60°F, when tested as specified in 4.4.1.1.

3.2.8 Wood. Wood for end and side base assemblies shall be free from decay, knots, shakes, checks, splits, or splintery surfaces. The end and side base assemblies shall be of the design and dimensions shown on Drawing 2-2-135 and shall contain not more than 12 percent moisture when tested as specified in 4.4.1.1. Any of the following woods may be used:

Ash	Cedar	Hickory	Pecan	Spruce
Beech	Douglas fir	Maple	Pine	Sycamore
Birch	Hemlock	Oak	Poplar	Tupelo

3.2.9 Buckles, double bar with slide. Buckles shall conform to type III, style 1, class 1 of MIL-B-543.

3.2.10 Clips, end, strap. End clips shall conform to type I, class 1, size 1-1/2 inch of MIL-C-496.

* 3.2.11 Fasteners, slide, interlocking. Slide fasteners shall conform to type I, style 18, size MH, with brass or aluminum or continuous polyester monofilament chains, single wire stirrup pull with thong attached as per V-F-106. A stop shall be applied on one side of the chain, at the center of the chain lengthwise, to prevent movement of the two sliders beyond the midpoint of the fastener. The slide fastener tape shall be one inch wide, water repellent. For colors other than olive drab, the tape shall be mildew resistant treated in conformance with class d, inhibitor (a) or (d) of CCC-D-950. For olive drab shades, the tape shall be mildew resistant treated in conformance with class d, inhibitor (d) of CCC-D-950. The fastener tape shall be dyed to match the color (shade) selected for the cloth (see 3.2.1 and 6.2). As an alternative, continuous chain method may be used when monofilament chains are supplied.

3.2.12 Rivets. Rivets shall conform to type XII, class 1, grade F, 9/64 inch nominal diameter, with type II, grade F cap of FF-R-556. The length of the rivets shall be such to provide a secure clinch.

* 3.2.13 Screws, wood. Wood screws shall be steel, zinc coated, and shall conform to style 2s, type I, 1/2 inch, No. 6 of FF-S-111.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

3.2.14 Washers. Washers shall be steel, zinc coated, of the type and size shown on drawings.

3.3 Construction. Construction shall conform to the drawings listed in section 2 and as specified herein.

3.3.1 Coated cloth. During manufacture of the case, the smooth side (side having the heavier coating) of the vinyl coated cloth shall be to the outside.

3.3.2 Stitching, machine. All stitching shall conform to type 301 of FED-STD-751, 5 to 7 stitches per inch.

3.3.2.1 Thread breaks. Thread breaks shall be overstitched not less than 1 inch at each break.

3.3.2.2 Stitching ends. Ends of stitching shall be overstitched not less than 1 inch except where ends are turned under in a hem, where ends are held down by other stitching, or where stitching is performed automatically. Where stitching is performed automatically on stitch patterns such as box, box with cross-stitch, "W" stitching, or straight line tacking, three or more tying, overlapping, or backstitches shall be used to secure the ends.

3.3.2.3 Skipped stitches. Two or more consecutively skipped stitches shall be overstitched not less than 1 inch.

3.3.2.4 Lubricants. The addition of any lubricant to the polyester thread prior to or during the sewing operations is prohibited.

3.3.3 Bonding. The flexible vinyl plastic film shall be bonded to the glass fiber insulation, where specified on the drawings, by spraying a fine film of the adhesive specified in 3.2.4.1 on the glass fiber insulation and then laying the flexible film on the adhesive. The flexible film shall be bonded together where it is lapped and joined by means of adhesive specified in 3.2.4.2. Care shall be exercised in applying adhesive so that no adhesive shall come in direct contact with the vinyl coated fabric. All bonded pieces shall be allowed to dry thoroughly before inclusion in the case.

3.3.4 Setting of end clips. Webbing shall be inserted the full depth of the clips. The clips shall be attached without cutting the webbing, and the webbing shall lie flat at the point of entrance.

3.3.5 Setting of tubular rivets. Holes shall be formed by the rivets when driven into the material and not punched prior to insertion of the rivets. All rivets shall be set without damage to the materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

3.3.6 Setting of wood screws. Wood screws shall be driven and set. When the screws are driven by powered screwdrivers, care shall be taken that the screw threads shall not be stripped by over-driving. The driving of screws by means of a hammer shall not be permitted. The size of the pilot hole for insertion of screws shall be in accordance with the manufacturer's procedure.

3.3.7 Attachment of slide fasteners. Care shall be exercised to trim all thread ends to 1/2 inch or less and to maintain specified distances between edges of fabric attached to slide fastener tape so that there will be no interference with the operation of the slider. The length of the slide fastener chains shall be such that, after the slide fasteners are sewed on, the tapes shall not be puckered and the sliders shall operate freely.

3.4 Marking. All marking shall conform to DDD-L-20.

3.4.1 Special marking. The application of the letters "US" on the case shall be in accordance with type IV, class 9 of DDD-L-20. Class 9 marking shall be legible after subjection to accelerated weathering. The letters shall be in the size, character, and location shown on Drawing 2-2-130.

3.4.2 Identification marking. Identification marking shall conform to type IV, class 5 of DDD-L-20 and shall be located as shown on Drawing 2-2-127.

* 3.5 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels. Cloth components shall be clean and free of holes, cuts, tears, scratch or abrasion marks, or cloth defects such as uncoated areas, blisters, tunnels, foreign matter, delamination of coating, lumps, or heavily coated areas. Webbing and tapes shall not have frayed or scalloped edges. Thread tension shall be maintained so that there will be no loose or tight stitching. Seam allowances shall be maintained with seams properly sewed so that no runoffs, pleats, or open seams shall result. Care shall be taken to see that no needle chews occur. All thread ends shall be trimmed to 1/2 inch or less. Metal components shall be free of burrs, sharp edges, or corroded areas, and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specifed in 4.4.3 and 4.4.4. The presence of any visual defect or any dimension not within the specified requirements shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component testing. In addition to the quality assurance provisions of the subsidiary documents, tests shall be performed on components and materials listed in table I for the characteristics shown. A lot shall consist of all insulation, adhesive, washers, and wood, as applicable, offered for inspection at one time. Requirements are applicable to the sample unit. The sample unit for each component shall be as specified in table I. For each characteristic, the inspection level shall be S-1, and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

TABLE I. Component tests

Component	Characteristic	Requirement paragraph	Test method	Number of determinations per sample unit	Results reported as	Sample unit
Adhesive	Material identification	3.2.4.1	Commercial	1	Pass or fail	1 pint
Insulation	Thickness	3.2.7	Commercial	3	Avg of 3 deter to nearest 1/16 inch	1 piece 24 inches by 30 inches
	Weight	3.2.7	Direct weighing	1	Pass or fail	
	Heat transmission	3.2.7	4.5.1	3	Avg of 3 deter to nearest 0.01 Btu/hr/sq ft/°F	
Wood	Moisture content	3.2.8	4.5.2	3	Avg of 3 deter	1 base assembly (end and side)
Washers	Material identification	3.2.14	Commercial	1	Pass or fail	1 each

4.4.2 In-process inspection. Inspection shall be made at appropriate stages of fabrication to determine conformance to specified requirements. Whenever nonconformance is noted, correction shall be made to the affected items and to the process. The following shall be inspected:

a. Wood end and side base assemblies shall contain no decay, knots, shakes, checks, split, or splintery surfaces for compliance with 3.2.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

b. There shall be no lubrication of polyester thread prior to or during sewing operation for compliance with 3.3.2.4.

c. Bonding of flexible film to glass fiber insulation and bonding of glass fiber insulation pieces shall be in accordance with 3.3.3 and the drawings.

d. Setting of tubular rivets and caps shall be performed as specified in 3.3.5.

e. Construction of base assembly shall be as specified on Drawing 2-2-135.

* 4.4.3 End item visual examination. The end items shall be examined for the defects listed in table II. The lot size shall be expressed in units of completely fabricated cases offered for inspection at one time. The sample unit shall be one case. The inspection level shall be II and the AQL, expressed in terms of defects per hundred units, shall be 2.5 for major defects and 15 for total (major and minor combined) defects.

TABLE II. End item visual defects

Examine	Defect	Classification		
		Major	Minor A	Minor B
Fabric	Any hole, cut, or tear	101		
	Exposed fabric, delamination of coating	102		
	Scratch or abrasion, blister, tunnel, crease, or wrinkle		201	
Webbing, tape	Edge frayed or scalloped		202	
Hardware	Broken	103		
	Malformed:			
	- fails to perform intended function	104		
	- but will perform intended function		203	
	Corroded area			301
	Burr or sharp edge which may cause injury in handling or damage to fabric	105		
End clips	Improperly clinched (i.e., webbing not flat at point of entrance into clip)			302

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
End clips (cont'd)	Clinched excessively tight, cutting webbing or loosely clinched (i.e., clip becomes disengaged from webbing)	106		
Buckle	Not assembled to strap as specified (i.e., reversed, failing to effect a fastening of strap)	107		
Wood screws and washers	Any screw or washer missing or not set	108		
Seams and stitching	Open seam:			
	- 1/2 inch or less			303
	- more than 1/2 inch, but not more than 1 inch		204	
	- more than 1 inch	109		
NOTE:	A seam shall be classified as open when one or more stitches joining a seam are broken, or when one or more skipped or runoff stitches occur. On double stitched seams, a seam shall be classified as open when either one or both sides of a seam are open.			
	Thread breaks overstitched less than 1 inch			304
	Needle chews resulting in hole, cut, or tear	110		
	Skipped stitches overstitched less than 1 inch (where 2 or more consecutively skipped stitches occur)			305
NOTE:	Skipped stitches not overstitched shall be classified as open seams.			
Seam type	Wrong seam type	111		
Stitch type	Wrong stitch type	112		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
Seams and stitching (cont'd)				
Stitch tension	Loose, resulting in an exposed bobbin or top thread for more than 6 inches in length			306
	Tight, as evidenced by puckering on seams for more than 6 inches in length			307
Stitches per inch	Less than minimum specified:			
	- one stitch			308
	- two or more stitches	205		
	More than maximum specified:			
	- one stitch			309
	- two or more stitches	206		
	NOTE: Variation in the number of stitches caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or heavy seams or in turning corners shall be classified as follows: a. Within the minor "B" defect classification - no defect. b. Within the minor "A" defect classification - minor "B" defect.			
Stitching margin	Larger than specified by more than 1/16 inch:			
	- for more than 1 inch, but not more than 4 inches in length			310
	- for more than 4 inches in length	207		
Stitching gage	Not as specified	208		
Stitching ends	Overstitched less than 1 inch (except where ends are held down by other stitching, turned under in a hem or where stitching is performed automatically)			311

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects (cont'd)

Examine	Defect	Classification		
		Major	Minor A	Minor B
Seams and stitchings (cont'd)				
Stitching ends (cont'd)	Secured with less than three tying, overlapping, or backstitches when automatic stitching is performed			312
Seams	Pleated			313
Components and assembly	Any component part not fabricated of applicable referenced material	113		
Slide fastener tapes	Slider jams or fails to interlock chain	114		
	Any tape improperly assembled, causing failure of chain to effect a closure	115		
Marking	Omitted, incorrect, illegible, misplaced, or size of characters not as specified			314
Cleanness	Grease or oil stain			315
	Thread ends not trimmed to 1/2 inch or less (except in slide fastener area)			316
	Thread ends not trimmed to 1/2 inch or less in slide fastener area		209	

* 4.4.4 End item dimensional examination. The end items shall be examined for the defects listed in table III. Only those dimensions that can be evaluated without damaging or disassembling the end items shall be examined. The lot size shall be expressed in units of cases. The sample unit shall be one case. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0 for major defects and 10 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

TABLE III. End item dimensional defects

Examine	Defect	Classification	
		Major	Minor
Overall dimensions	Smaller than specified dimensions less applicable minus tolerances indicated on drawings	101	
	Larger than specified dimensions and applicable plus tolerance indicated on drawings		201
Location dimensions	Not within the specified requirements		202

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number per container is more or less than required

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

4.5 Methods of inspection.

4.5.1 Heat transmission value test. Testing for the heat transmission value (U_2) shall be in accordance with ASTM D 1518. U_2 is the intrinsic transmittance coefficient of the insulation and shall be determined by the following formula:

$$U_2 = \frac{U_{bp} \times U_1}{U_{bp} - U_1}$$

where

U_{bp} = transmittance coefficient of the bare plate when exposed to air, not covered by a sample, and
U_1 = combined transmittance coefficient of the specimen plus the air when the plate is operated with the sample in place.

4.5.2 Moisture content of wood test. Moisture content of wood end and side base assemblies shall be determined by either the oven-drying or electric moisture meter method referenced in ASTM D 2016.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each case shall have the slide fasteners closed and the carrying strap adjusted to the smallest dimension. The carrying strap excess shall then be folded back over the top of the unit and tucked underneath itself.

5.1.2 Commercial preservation. Cases shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. Two cases, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each PPP-B-636 container shall be fitted with a box liner conforming to type CF, class weather resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed with the back down, within a shipping container having approximate inside dimensions of 21 inches in

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

length, 23-1/2 inches in width, and 17-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Two cases, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF, variety SW or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed with the back down, within a shipping container having approximate inside dimensions of 21 inches in length, 23-1/2 inches in width, and 17-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with method III as specified in PPP-B-636 and closed in accordance with the appendix of PPP-B-636.

5.2.3 Commercial packing. Cases, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), cases packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 90 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.


6.1 Intended use. The insulated case is primarily for use in cold climate areas as a case for the 5-gallon water can to keep water from freezing. The case may also be used for transporting warm food, coffee, or other supplies to troops in the field.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article is required (see 3.1, 4.3, and 6.3).
d. Color selection in accordance with 3.2.1.
e. Color webbing shall be dyed, if other than specified (see 3.2.2).
f. Color thread shall be dyed, if other than specified (see 3.2.3).
g. Color fastener tape shall be dyed, if other than specified (see 3.2.11).
h. Levels of preservation and packing (see 5.1 and 5.2).
i. Type and class of unit load (see 5.2.1).
j. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
k. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Federal Acquisition Regulation (FAR) 52.209. The first article should be preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

* 6.4 Part or identifying number (PIN). The PINs to be used for items acquired by this specification are created as follows:

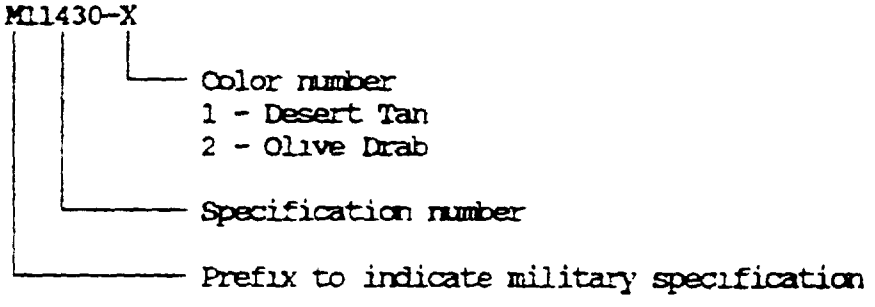

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Carrier
Container

6.6 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 99

Review activities:

Air Force - 84
DLA - GS

User activity:

Navy - MC

Preparing activity:

Army - GL

(Project 7240-0257)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

1. I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-11430E	2. DOCUMENT DATE (YYMMDD) 15 November 1991

3. DOCUMENT TITLE: CASE, MILITARY WATER CAN, INSULATED

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	e. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
U.S. Army Natick RD&E Center	508-651-4531	256-4531
c. ADDRESS (Include Zip Code) Commander, U S. Army Natick RD&E Center ATTN STRNC-UXT	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:16:02Z
Check the source to verify that this is the current version before use.