INCH-POUND

MIL-T-11372F
2 JULY 1991
SUPERSEDING
MIL-T-11372E
1 September 1978

MILITARY SPECIFICATION

TRIVETS, SURVEYING INSTRUMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two sizes of trivets on which surveying theodolites are mounted.

1.2 Classification. Trivets shall be the following sizes as specified (see 6.2 and 6.6):

Size I - Small, diameter 5.875 inches or 150 millimeters (mm).
Size II - Large, diameter 7.875 inches or 200 mm.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-S-3534	-	Surveying Instruments, and Accessories, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28	-	Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of US Military Property.
MIL-STD-889	-	Dissimilar Metals.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation. (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 47	-	Ferritic-Malleable Iron Castings.
A 48	-	Gray Iron Castings.
A 582	-	Free-Machining Stainless and Heat-Resisting Steel Bars, Hot-Rolled or Cold-Finished.
B 121	-	Leaded Brass Plate, Sheet, Strip and Rolled Bar.
B 584	-	Copper Alloy Sand Castings for General Applications.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The trivet shall consist of a base, legs, wrench, and instrument fastener in accordance with figure 1.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The trivet shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the trivet may be exposed.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the trivet may be newly fabricated from recovered materials to the maximum extent practicable, provided the trivet produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the trivet.

3.3.5 Brass bar. Brass shall conform to ASTM B 121, Copper Alloy UNS C34200 or C35300, temper H01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

3.3.6 Corrosion-resistant steel. Corrosion-resisting steel shall conform to ASTM A 582, type 430F, condition A.

3.3.7 Brass castings. Brass castings shall conform to ASTM B 584, Copper Alloy UNS C85200, C85400 or C85700 as cast conditions.

3.3.8 Gray cast iron. Castings shall conform to ASTM A 48 Class 20, 25, or 30.

3.3.9 Malleable iron. Malleable iron shall conform to ASTM A 47 Grade 32510.

3.4 Threaded parts. All threads shall be in accordance with FED-STD-H28.

3.5 Wrench. A corrosion-resisting steel wrench shall be provided. The wrench shall fit the legs and instrument fastener.

3.6 Treatment and painting. Unless otherwise specified (see 6.2) the trivet, with the exception of the instrument fastener, legs, wrench, and wrench retainer, shall be finished and painted at the option of the contractor.

3.7 Identification marking. The trivet shall be identified in accordance with MIL-STD-130.

3.8 Workmanship. All parts shall be clean, free from rust, sharp edges, tool marks, pits, and other injurious defects.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The trivet shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The trivet shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and test shall be in accordance with MIL-STD-105. Sample size shall be determined by using MIL-STD-105, table I and table II-A. A lot shall be accepted when zero defects are found and rejected when one or more defects are found.

4.4.2 Examination. Samples selected as specified in 4.4.1 shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.3 Tests.

4.4.3.1 Individual. Each trivet shall be tested as specified in 4.5.2. Failure to pass the test shall be cause for rejection of that trivet.

4.5 Inspection procedure.

4.5.1 Examination. The trivets shall be examined as specified herein for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

Major

101. Components missing or not as specified (see 3.1).
102. Materials not as specified (see 3.3).
103. Materials are not corrosion resistant or treated to be made corrosion resistant for the applicable storage and operating environment (see 3.3.1).
104. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.2).
105. Contractor does not have documentation available for identification of material, material finishes or treatments (see 3.3.3).
106. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the trivet (see 3.3.4).
107. Threads not as specified (see 3.4).
108. Wrench does not fit legs or instrument fastener or is not firmly in place (see 3.5).
109. Treatment and painting not as specified (see 3.6).
110. Workmanship not as specified (see 3.8).

Minor

201. Identification marking missing, incomplete or illegible (see 3.7).

4.5.2 Test.

4.5.2.1 Screw fastener threads. The screw fastener threads shall be tested with a 0.625-11 UNC-2A ring gage. Failure of threads to conform to FED-STD-H28 shall constitute failure of this test (see 6.4).

4.6 Inspection of packaging. The preservation, packing, and marking for level A, B and C shall be examined to determine compliance with the quality assurance provisions of MIL-S-3534.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each complete trivet shall be preserved in accordance with the level A preservation requirement of MIL-S-3534.

5.1.2 Level C. Each complete trivet shall be preserved in accordance with the level C preservation requirements of MIL-S-3534.

5.2 Packing. Packing shall be level A, level B, or level C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

free of electrostatic and radiofrequency electromagnetic fields so as not to affect the

5.2.1 Level A. Trivets, preserved as specified in 5.1, shall be packed in accordance with the level A packing requirements of MIL-S-3534.

5.2.2 Level B. Trivets, preserved as specified in 5.1, shall be packed in accordance with the level B packing requirements of MIL-S-3534.

5.2.3 Level C. Trivets, preserved as specified in 5.1, shall be packed in accordance with the level C packing requirements of MIL-S-3534.

5.3 Marking. In addition to any special marking specified in the contract or purchase order (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of general or explanatory nature which is helpful, but is not mandatory.)

6.1 Intended use. The trivets are intended for use as a base for mounting theodolites when it is impracticable to use a standard tripod.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Size of trivet required (see 1.2).
d. Time frame required for submission of first article trivet (see 3.2).
e. When treatment and painting is other than the contractor's option (see 3.6).
f. Level of preservation and level of packing required (see 5.1 and 5.2).
g. Any special marking (see 5.3).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.


6.4 Ring gage. The contractor shall be required to provide certification that the ring gage conforms to FED-STD-H28 (see 4.5.2).

6.5 Subject (key word) listing.

Threaded parts
Wrench
Base
Legs

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.6 Part or identifying number (PIN). The part or identifying number (PIN) of trivets covered by this specification shall be designated in the following form (see 6.2):

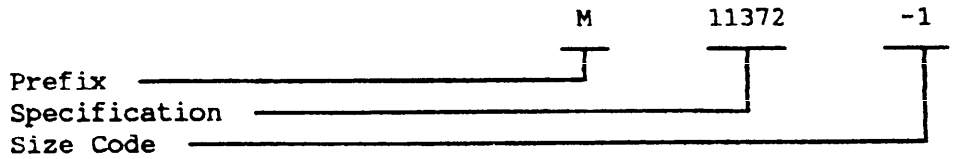

Example: M11372-1 is the PIN for a small trivet.

6.6.1 Size code. See table I.

TABLE I. Size Code.

Code	Size	Description
1	I	Small
2	II	Large

Custodian:
Army - ME
Air Force - 99

Review activity:
DLA - GS

Preparing Activity:
Army - ME

Project 6675-0942

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

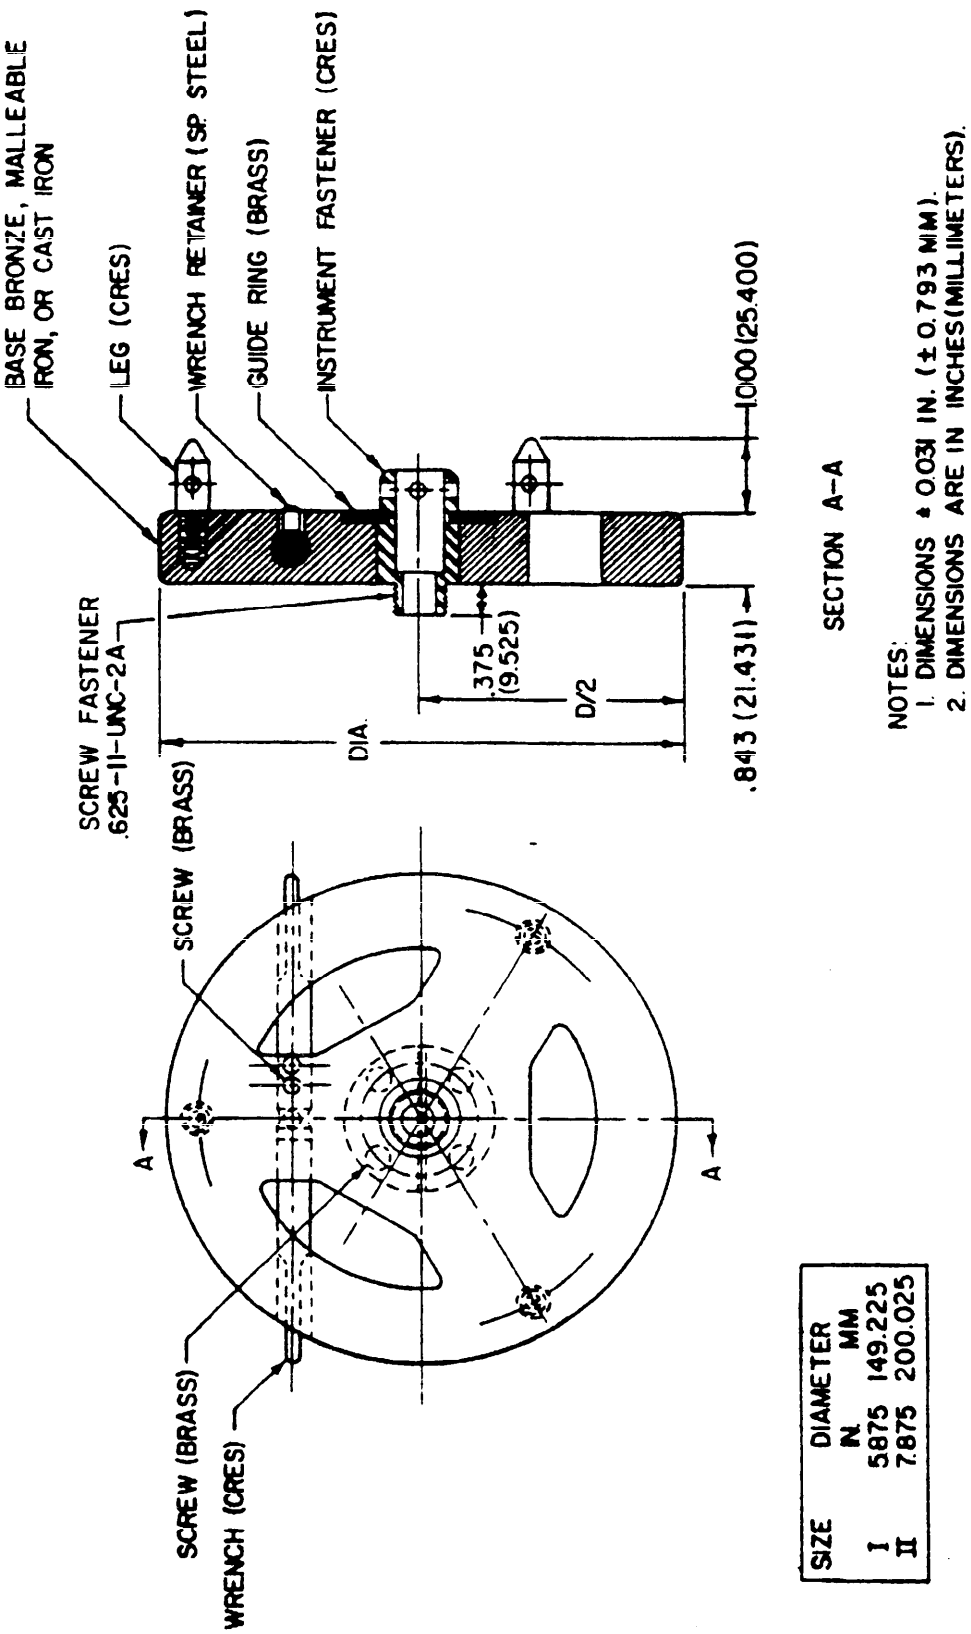


FIGURE 1. Trivet assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-11372F	91/07/02

3. DOCUMENT TITLE

Tripod, Surveying Instrument

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)

b. ORGANIZATION

c. ADDRESS (Include Zip Code)

d. TELEPHONE (Include Area Code)
(1) Commercial
(2) AUTOVON
(If applicable)

e. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME

b. TELEPHONE (Include Area Code)
(1) Commercial: (703) 664-5717
(2) AUTOVON: 354-5717

c. ADDRESS (Include Zip Code)
US Army Belvoir RDE Center
ATTN: STRBE-TSE

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:
Defense Quality and Standardization Office
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466

Source: https://assist.dla.mil -- Downloaded: 2026/10-17T15:58Z
Check the source to verify that this is the current version before use.