MIL-T-11416C
26 DECEMBER 1963
SUPERSEDING
MIL-T-11416B
22 JANUARY 1957

MILITARY SPECIFICATION

TABLE, DINING (HOSPITAL, METAL BASE)

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers one type and size of 4-place dining table, with aluminum supports (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-A-274 —Aluminum Alloy Bars, Rods and Shapes, Extruded, 6063.
MMM-A-188—Adhesive; Urea-Resin-Type (Liquid and Powder).
PPP-B-636 —Box, Fiberboard

MILITARY

MIL-V-1174 —Varnish, Spar, Water-Resisting (Formula No. 80).
MIL-W-6110 —Wood; Determination of Moisture Content of.
MIL-L-6806 —Lacquer, Clear, Aluminum-Clad, Aluminum-Alloy Surfaces.

STANDARDS

MILITARY

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.
MIL-STD-130—Identification Marking of U.S. Military Property.

DRAWINGS

NATICK LABORATORIES

5-8-98—Table, Hospital Dining, (Hospital, Metal Base); Assembly.
5-8-99—Table, Dining, (Hospital, Metal Base); Details.

(Miniature copies of referenced Drawings 5-8-98 and 5-8-99, identified as figures 1 and 2 respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawing required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

UNITED STATES DEPARTMENT OF COMMERCE
Commercial Standard CS35–61 Hardwood Plywood.
Commercial Standard CS45–60 Douglas Fir Plywood.

(Copies of commercial standards may be obtained upon application to the Superintendent of Documents, Government Printing Office, Washington 25, D.C.)

NATIONAL ELECTRICAL MANUFACTURERS' ASSOCIATION
Publication LP2–1957 Laminated Thermosetting Decorative Sheets.

(Copies of Publication LP2–1957 may be obtained from National Electrical Manufacturers' Association, 155 E. 44th Street, New York 17, N.Y.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished table shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction table shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials. The materials shall conform to the referenced specifications and requirements specified herein. Materials not specifically defined shall be as normally used by the manufacturer for the intended purpose.

3.2.1 *Plywood panels.* Plywood panels shall be constructed of either hardwood veneers, a combination of softwood and hardwood veneers, or a combination of hardwood veneers and lumber core, as specified in 3.2.1.1, 3.2.1.2, and 3.2.1.3, respectively. Face and back veneers for all constructions shall be close grained hardwood conforming to grades 1 or 2 veneers of Commercial Standard CS35–61. The veneers shall be of such thickness as required to produce the finished top size and to produce a balanced panel to prevent warping.

3.2.1.1 *Hardwood plywood panels.* Hardwood plywood panels fabricated of all hardwood veneers shall be either 5 or 7 ply and shall be constructed in accordance with type I, grade 1 or 2 of Commercial Standard CS35–61.

3.2.1.2 *Combination softwood and hardwood veneer plywood panels.* Combination softwood and hardwood veneer plywood panels shall be either 5 or 7 ply and shall have inner plies of softwood conforming to exterior type, grade A–B of Commercial Standard CS45–60. Hardwood face and back veneers shall be as specified in 3.2.1 and shall have an exterior type bond.

3.2.1.3 *Combination hardwood veneers and lumber core.* Combination hardwood veneers and lumber core plywood panels shall be 5-ply minimum and shall be constructed with a lumber core of medium or low density hardwood, Idaho or Ponderosa Pine, Spruce, or similar low density softwood. Construction of the lumber core shall be in accordance with regular grade of Commercial Standard CS35–61. After lumber core has been glued, and prior to surfacing, the moisture content shall be stabilized to not less than 5 and not more than 8 percent when tested as specified in 4.3.3. Hardwood face and back veneers shall be as specified in 3.2.1. Veneers shall have an exterior type bond and lumber core may be glued in accordance with manufacturer's standard practice.

3.2.2 *Decorative laminate sheet.* The laminated decorative sheet shall be not less than $\frac{1}{16}$ inch nominal thickness and shall conform to type I (general purpose type) of National Electrical Manufacturers Association Publication (NEMA) LP2–1957. The face surface of the sheet shall have a satin finish and the color shall be Pearl Grey (see 6.4), and shall be approved by the contracting officer.

3.2.3 *Backing sheet.* The backing sheet shall be a phenolic laminated kraft sheet not less than 0.020 inch thick as recommended in NEMA Publication LP2–1957.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

3.2.4 *Aluminum extrusions.* Extruded aluminum alloy (6063) shall conform to tempers T5 or T42 of Specification QQ–A–274, as applicable.

3.2.5 *Adhesive, urea-resin-type (liquid and powder).* The adhesive shall be urea-resin-type conforming to type III of Specification MMM–A–188.

3.2.6 *Lacquer.* The lacquer shall conform to Specification MIL–L–6806.

3.2.7 *Varnish.* The varnish shall conform to Specification MIL–V–1174.

3.3 Construction. The table shall be constructed in accordance with Drawings, 5–8–98 and 5–8–99 and as specified herein. Aluminum components shall have all exposed sharp corners and edges broken. The table shall be rigid and shall not rock more than $\frac{1}{16}$ inch.

3.3.1 *Gluing.* The adhesive used for bonding the laminated decorative sheet and backing sheet to the table (see 3.4.1) shall be as specified in 3.2.5. Adhesive shall be applied in an adequate and uniform manner as recommended by the adhesive manufacturer.

3.4 Component details.

3.4.1 *Table top.* The table top shall be fabricated from plywood specified in 3.2.1. A laminated, decorative sheet specified in 3.2.2 shall be bonded to the top surface of the plywood panel. At time of bonding, the moisture content of the plywood panel shall be from 5 to 8 percent, when tested as specified in 4.3.3. A backing sheet specified in 3.2.3 shall be bonded to the bottom surface of the plywood panel. All bonding shall be in accordance with 3.3.1. The sides of the plywood panel shall be edged with molding specified in 3.4.2. No seams or joints shall appear on the face surfaces of the laminated decorative sheets. All edges shall be beveled or chamfered as shown on Drawing 5–8–98. The face surfaces of the laminated decorative sheets shall be free from mars; patched, blistered or rough areas; chips, cracks, pinholes and scratches. There shall be no delamination between the laminated decorative sheets and the plywood core. When viewed at a distance of 5 feet, discoloration, spotting, streaking, staining, surface waviness, swells, lapping of printed layer, depression, mold marks, plywood imperfections and grain shall not be visible in the laminated decorative sheet. There shall be no warp greater than $\frac{1}{8}$-inch in length or width of table top. Lead holes for screw insertion shall be drilled in the location shown on Drawing 5–8–98 and in compliance with applicable notes. Lead holes shall align the holes in legs and braces for ease in assembling.

3.4.2 *Molding.* The molding as shown on Drawings 5–8–98 and 5–8–99, shall be an extrusion of the T-section type, anodized a natural color and shall be extruded from aluminum alloy specified in 3.2.4. The molding shall be either one or two pieces and shall be properly bent to the radii of the corners of the table top. The ends of the molding shall be cut square and shall be butt jointed; with opening at joints not more than $\frac{1}{64}$-inch. The molding shall be attached to the top by imbedding the barbed section into the saw kerf slot in the edge of the top in such a manner that there shall be no open joint greater than $\frac{1}{64}$-inch between the top edge of the molding and the edge of the laminated thermosetting decorative sheet. In addition to the barbs, the molding shall be secured in place to the top with not less than four brads on each of the four sides. The brads shall be driven from the underside of the table top and through the barbed tongue of the molding.

3.4.3 *Legs and braces.* The legs and braces shall be made of material specified in 3.2.4 as applicable and shall be formed as shown on Drawing 5–8–99. Legs and braces shall be properly bent or formed to correct radii without ripples or flatness.

3.4.4 *Glides.* Glides shall be commercial type, of the size and construction shown on Drawing 5–8–99, and fabricated of corrosion-resisting steel, or case hardened steel with a nickel or chromium protective coating. Glides

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

shall be provided with a rubber insulator or cushion to protect the table against jars and vibration. Glides shall be assembled to legs specified in 3.4.3.

3.4.5 *Screws, nuts, lockwashers and brads.* The miscellaneous hardware shall be steel, cadmium plated, of the types and sizes specified on Drawings 5–8–98 and 5–8–99, except that brads need not be cadmium plated.

3.5 Finish.

3.5.1 *Legs and braces.* The legs and braces shall be of a satin grained finish corresponding to a standard reference panel (see 6.3). Graining is achieved by etching tiny lines parallel to the lengthwise edges of the metal surface. The parts shall be thoroughly cleaned of grease, oil and other injurious substances prior to lacquering or varnishing. The legs and braces shall be coated with either lacquer or varnish specified in 3.2.6 or 3.2.7 respectively. Coating shall be free from dust, lint and other inclusions.

3.6 Assembly instructions. An assembly instruction sheet shall be furnished with each table.

3.7 Marking for identification. The underside of the table top shall be permanently marked in black for identification in accordance with the equipment marking requirements of Standard MIL–STD–130. The letters "U.S." shall be not less than 1 inch high and all other markings shall be not less than ¼-inch high.

3.8 Workmanship. The finished tables shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, the preproduction sample shall be examined for defects listed in 4.3.4.1 and specified dimensions.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in Standard MIL–STD–105, except where otherwise indicated.

4.3.1 *Component and material inspection.* In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified or, if none, in accordance with this specification.

4.3.2 *In-process inspection.* Inspection shall be made of the table top prior to molding being assembled, and of the legs and braces prior to lacquering or varnishing, to verify that accomplishment of the following is in accordance with the specified requirements. Whenever nonconformance is noted, correction shall be made to affected items and lot in-process.

Operation	*Requirement paragraph*
Plywood top fabrication	3.4.1
Cleanliness of legs and braces	3.5.1

4.3.3 *Intermediate testing.* Testing shall be performed for moisture content in accordance with Specification MIL–W–6110, for compliance with 3.2.1.3 and 3.4.1. Three determinations shall be taken on each sample unit and the results for the unit shall be the average of the three determinations. The sample unit shall be one lumber core after gluing and prior to surfacing, or one plywood panel prior to bonding of laminated decorative sheet as applicable. The lot shall be all lumber cores or panels, as applicable, submitted for inspection at one time. The in-

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

spection level shall be S2 with an acceptable quality level (AQL) of 2.5, expressed in terms of defects per hundred units.

4.3.4. *End item inspection.* The lot shall consist of all complete tables offered for acceptance at one time. The sample unit for this inspection shall be one complete table unassembled.

4.3.4.1 *Visual examination.* Examination of the end item shall be in accordance with the classification of defects set forth below. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0 for major defects, and 6.5 total defects, expressed in terms of defects per hundred units.

Examine	Defects	Classification	
		Major	Minor
Surface appearance of legs and braces.	Not coated with finish as specified		X
	Area of no lacquer or varnish *		X
	Discoloration affecting appearance, i.e. coating tarnished, stained, blemished, or contains water marks *		X
	Lacquer or varnish tacky, i.e., not completely dry		X
	Coating blistered, flaked, peeled or checked *		X
	Coating scratched		X
	Any sag or run		X
	Orange peel or coating wrinkled		X
	Finish rough, i.e., dirt or other foreign matter imbedded in finish *		X
	Not satin grained finish under lacquer or varnish (compare with approved sample) *		X
	Graining lines not parallel to lengthwise edges *		X
	Evidence of sharp lines in graining lines affecting appearance *		X
	Scratches or abrasions across graining line		X
	Area over 1 square inch not grained *		X
	Any evidence of corrosion		X
	Graining not uniform		X
	*Defects marked with asterisk apply only to parts exposed to view when table is in use position. Other defects listed apply to all surfaces.		
Surface appearance of molding.	Molding not anodized a natural color		X
	Any discoloration		X
	Scratch or abrasion		X
Quality of leg, brace and molding.	Metal malformed to an extent affecting assembly of component	X	
	Metal malformed, damaged or bent out of shape		X
	Split completely through metal	X	
	Surface of metal cracked		X
	Sharp projection that may cause injury or snag fabrics	X	
	Sliver, fin or burr	X	
	Metal wrinkled or lapped	X	
	Metal nicked, gouged or chipped in location affecting appearance of table when in use position		X
	Tool or grind mark in location affecting appearance of table when in use position		X
Quality of table top material.	Wrong finish, color or grain, i.e., not as approved sample		X
	Face sheet marred or discolored		X
	Scratch or chip out of top surface exposing inner plywood layer	X	
	Scratch, crack or bruise on top surface not exposing inner layer		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification	
		Major	Minor
	Any portion of face or backing sheet unbonded	X	
	Crack, crevice, hole or other opening in top surface which might harbor vermin or accumulate food particles	X	
	Top laminate patched		X
	Spot, specks, streak or stain		X
	Hairlines visible at 5 feet		X
	Rough or pitted area on top surface over 36 square inches	X	
	Rough or pitted area on top surface up to and including 36 square inches		X
	Bubble, blister or pinhole on top surface	X	
	Bubble or blister over 1 square inch in area on bottom surface		X
	Objectionable surface waviness, swell or depression on top surface		X
	Mold mark on top surface		X
	Plywood imperfection showing through face sheet		X
	Pronounced reproduction of wood grain visible on top surface of plastic laminate		X
	Warped (crook, concavity or convexity) exceeding $\frac{1}{8}$-inch lengthwise, widthwise or diagonally	X	
Construction and workmanship of table top, legs and braces.	Construction of components or subassembly departs appreciably from the specification or approved sample	X	
	Any component missing (except wood screw, washer or brad)	X	
	Molding not flush by more than $\frac{1}{64}$-inch at any point around the perimeter of table top	X	
	Bevel missing at edge of face sheet		X
	Bevel at edge of face sheet rough or irregular		X
	One or more lead holes on underside of table top missing or in wrong location		X
	Diameter of lead holes on underside table top not as specified		X
	Depth of lead holes on underside of table top greater than $\frac{1}{4}$-inch deep		X
	Molding not shape or contour specified		X
	Molding wrong size		X
	Method of attaching molding not as specified		X
	Molding consists of more than two pieces around the perimeter of the table top		X
	Molding loose or insecurely fastened		X
	Molding uneven or not neat		X
	Buttjoint at ends of molding open more than $\frac{1}{64}$-inch		X
	Molding rippled at radius of bend		X
	Molding attachment brads missing	X	
	Brad not driven from the underside of the table top		X
	Less than four brads per *side of table*		X
	Head of brad protrudes from surface of backing sheet		X
	Edge on leg or brace not rounded as shown on drawing		X
	Leg or brace rippled or flattened at radius of bend		X
	Contour of leg or brace out of specified shape		X
	Screw hole in leg or brace missing where required	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification	
		Major	Minor
	Screw hole (for machine screw) in leg or brace in wrong location	X	
	Screw hole (for wood screw) in leg or brace in wrong location		X
	Screw holes in leg or brace out of specified alignment		X
	Diameter of screw hole in leg or brace too small for entry of screw provided	X	
	Diameter of screw hole in leg or brace too large, affecting sturdy assembly	X	
	Any elongated screw hole		X
	Screw hole (for wood screw) in leg or leg brace not countersunk		X
	Screw hole (for wood screw) not countersunk on surface specified		X
	Screw hole (for machine screw) in leg or leg brace not threaded internally		X
	Evidence that screw hole in leg (for acceptance of glide screw) is not threaded		X
Glides	Glide not type specified		X
	Glide missing	X	
	Any glide not assembled to leg		X
	Glide broken or cracked	X	
	Glide damaged	X	
	Glide does not fit properly on leg, i.e., loose fit, cocked, or sets crooked on leg		X
	Rubber insert in glide cut, split, damaged or malformed		X
	Plating on glide (when applicable) peeled		X
	Glide nut not drawn up tight		X
Screws, nuts and lockwasher (attached and detached).	Any machine screw or nut missing	X	
	More than one wood screw missing	X	
	One wood screw missing		X
	Lockwasher missing		X
	Size of screw or nut not as specified		X
	Nut or screw split, cracked, stripped or damaged		X
	Type of screw not as specified		X
	Nut not acorn type		X
	Washer not lockwasher type		X
	Lockwasher does not fit on applicable screw		X
	Nut does not fit on its applicable screw	X	
	Any screw, nut or lockwasher not cadmium plated		X
	Hardware not packaged separately in a drawstring top cloth bag (except glide hardware)		X
Identification marking.	Marking missing		X
	Marking incorrect, illegible, incomplete, not permanent, not in black, wrong size, or in wrong location		X
Assembly instruction sheet.	Instruction sheet missing		X
	Instructions incorrect, illegible or incomplete		X
	Sheet torn or damaged to an extent limiting readability		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

4.3.4.2 *Dimensional examination.* Inspection shall be made of the end item for compliance with dimensions specified. The inspection level shall be S2 and the AQL 6.5, expressed in terms of defects per hundred units.

4.3.4.3 *Examination of assembly of the end item.* A representative sample, consisting of table top, legs, braces and necessary assembly hardware shall be assembled and examined for defects indicated below. The inspection level shall be level II with an AQL of 4.0 for major defects and 6.5 total, expressed in terms of defects per hundred units.

Examine	Defects	Classification	
		Major	Minor
Ease of assembly and of components.	Any component missing	X	
	Component mispositioned or in wrong location		X
	Component does not fit, i.e., unable to join or fully attach component	X	
	Any component out of alignment affecting appearance		X
	Any mating parts that cannot be drawn tight against each other	X	
	Cannot draw up screw flush against metal		X
	Stripped threads on nut or screw		X
	Evidence of galling or seizure in nut or screw when drawing up		X
	Table not easily assembled, i.e., special equipment or mechanical means other than wrench or screwdriver required to assemble table	X	
	Leg or brace misaligned or uneven over 1/16-inch where attached, i.e., any overhang over 1/16-inch between end or edges of leg or brace at location of attachment of aluminum components		X
	Lead hole on underside of table top does not align with applicable hole in leg or leg brace		X
	Wood screw head protrudes above surface of metal when fully drawn up		X
	Wood screw head more than 1/16-inch below surface metal		X
	Table assembly not rigid when assembled	X	
	Legs uneven, i.e., table rocks more than 1/16-inch when placed on a leveled surface		X
	Table overhung unevenly		X
	Hole visible in underside of table top or in metal after table is fully assembled		X

4.3.5 *Examination of preparation for delivery.* An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers offered for delivery at one time. The inspection level shall be S2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

Examination	Defect
Markings (exterior container)	Missing; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Component missing, damaged or otherwise defective.
Workmanship	Inadequate application of components such as container flaps, sealing, blocking and cushioning inadequate, improper or missing; closures improperly affixed; components improperly secured, inadequate stapling, bulging or distortion of containers.
Contents	Contents per container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 **Packaging.** Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.*

5.1.1.1 *Disassembly.* Tables shall be packaged knocked down.

5.1.1.2 *Table top.* The assembly instruction sheet shall be taped to the underside of the table top. The laminated top shall be covered with kraft paper having a minimum basis weight of 40 pounds per ream (24 by 36-500). A corrugated or solid fiberboard pad having a minimum bursting strength of 200 pounds per square inch (p.s.i.) shall be placed on the table top over the kraft paper.

5.1.1.3 *Assembly hardware.* The assembly hardware for each table shall be packaged in a drawstring cotton cloth bag. The bag shall be securely tied closed and secured to one of the leg braces.

5.1.1.4 *Legs and braces.* Legs and braces shall be individually sleeved or wrapped in kraft paper having a minimum basic weight of 40 pounds per ream (24 by 36-500) and then compactly nested.

5.1.2 *Level C.* Tables shall be packaged in accordance with the industry's practice.

5.2 **Packing.** Packing shall be level A, B or C as specified (see 6.2).

5.2.1 *Level A.* Each table, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class 2, V3c or V3s, style FTC of Specification PPP-B-636. Level A packages shall be arranged with the table top in the bottom of the container and laminated top surface up and packaged legs and braces resting on the fiberboard pad covering the table top. Fiberboard inserts shall be used to immobilize the legs and braces and to fill voids within the container. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 *Level B.* Each table, packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to type I or II, class 1, style FTC of Specification PPP-B-636. Level A packages shall be arranged with the table top in the bottom of the container and laminated top surface up, and the packaged legs and braces resting on the fiberboard pad covering the table top. Fiberboard inserts shall be used to immobilize the legs and braces and to fill voids within the container. Each shipping container shall be securely closed in accordance with the appendix of the container specification.

5.2.3 *Level C.* Tables, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.** In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Standard MIL-STD-129.

6. NOTES

6.1 **Intended use.** The table covered by this specification is intended to be used as a 4-place dining table for patients in hospital dining halls and cafeterias.

6.2 **Ordering data.** Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Stock number.

(c) When preproduction sample is not required (see 3.1).

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 The contracting officer should insure that the standard reference panel referenced in 3.5.1 is furnished to the supplier.

6.4 The pearl grey laminate sheet shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

approximate the following commercial sheets:

Panelyte—M–71
Formica—2–D–1

6.5 **Transportation description.** Transportation description and minimum weights applicable to this commodity are—

RAIL:
Table, Dining (Hospital, Metal Base). Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

MOTOR:
Table, dining (Hospital, Metal Base). Truckload minimum weight 24,000 pounds, subject to Rule 115, National Motor Freight Classification.

6.6 Glossary of terms used in the classification of defects.

Bubble —A raised portion of the surface caused by lack of adhesion of plastic to wood base.

Chip —An area where decorative laminates have broken off, either exposing or not exposing the inner layer.

Crack —A rupture in decorative laminates extending through top finish or deeper.

Dent —A depression in laminate, with or without fracture of top layer, made by striking or pressing.

Dimple —A depression in laminate without fracture of top layer, occurring as a result of manufacturing processes.

Hairlines —Faint lines in laminate without fracture of top layer, occurring as a result of manufacturing processes.

Mold Mark—Surface defect of pressing plate transferred into plastic during molding operation.

Pinholes —Minute holes which extend through top layer of laminate.

Pits —Surface irregularities in form of fine abrupt cavities.

Roughness —Surface irregularities in form of fine abrupt hills or waves capable of being felt.

Scratch —A linear incision or abrasion on top surface of laminate made by drawing something pointed over the surface.

Specks —Minute particles of foreign matter imbedded in top surface of laminate.

Spot —Permanent discoloration of a circular shape on top surface of laminate.

Streak —Permanent discoloration of an elongated shape on top surface of laminate.

Waviness —Surface irregularities in the form of waves, which are of greater pitch and spacing than those of "roughness," caused by improper surfacing of veneer core.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

Custodians:
Army—GL
Navy—Docks
Air Force—MOA
Interested activities:
Review
Army—MD
Navy—Docks, BuMed
Air Force—MOA

Preparing activity:
Army—GL
Project No. 7105-0036

Note. Reviewer information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

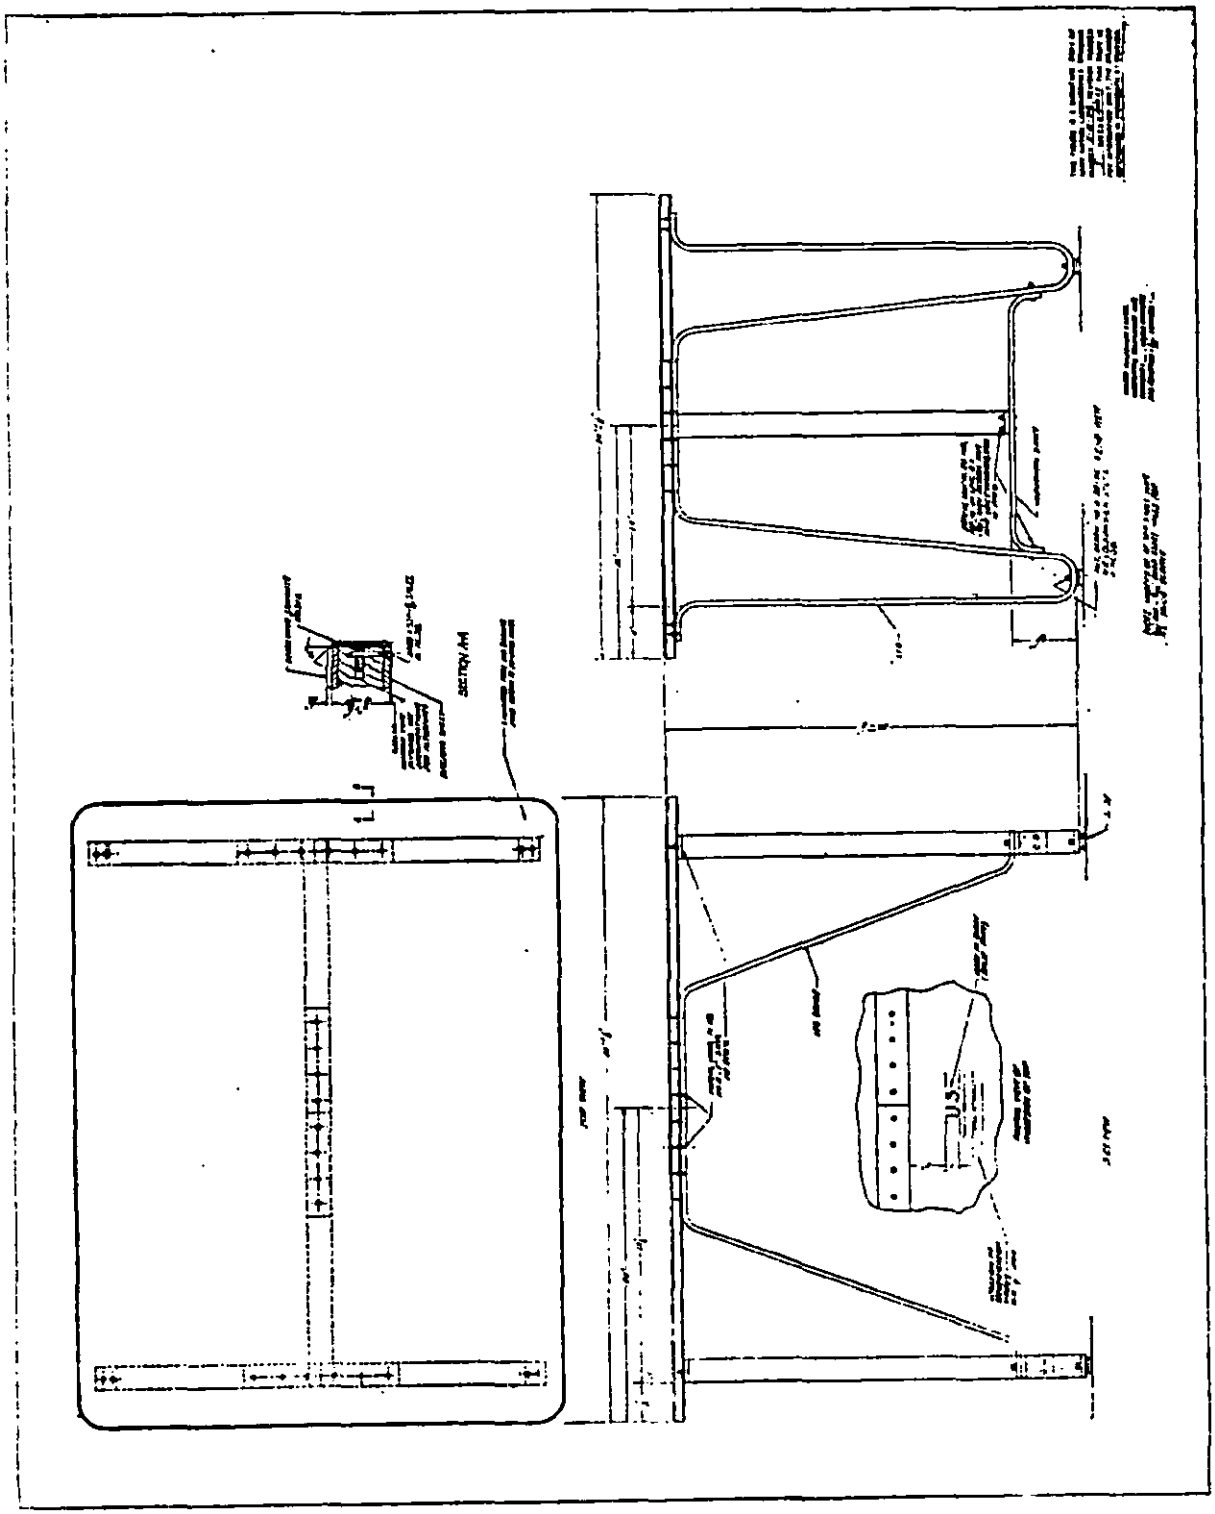


FIGURE 1. *Table, dining (hospital, metal base)—assembly.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.

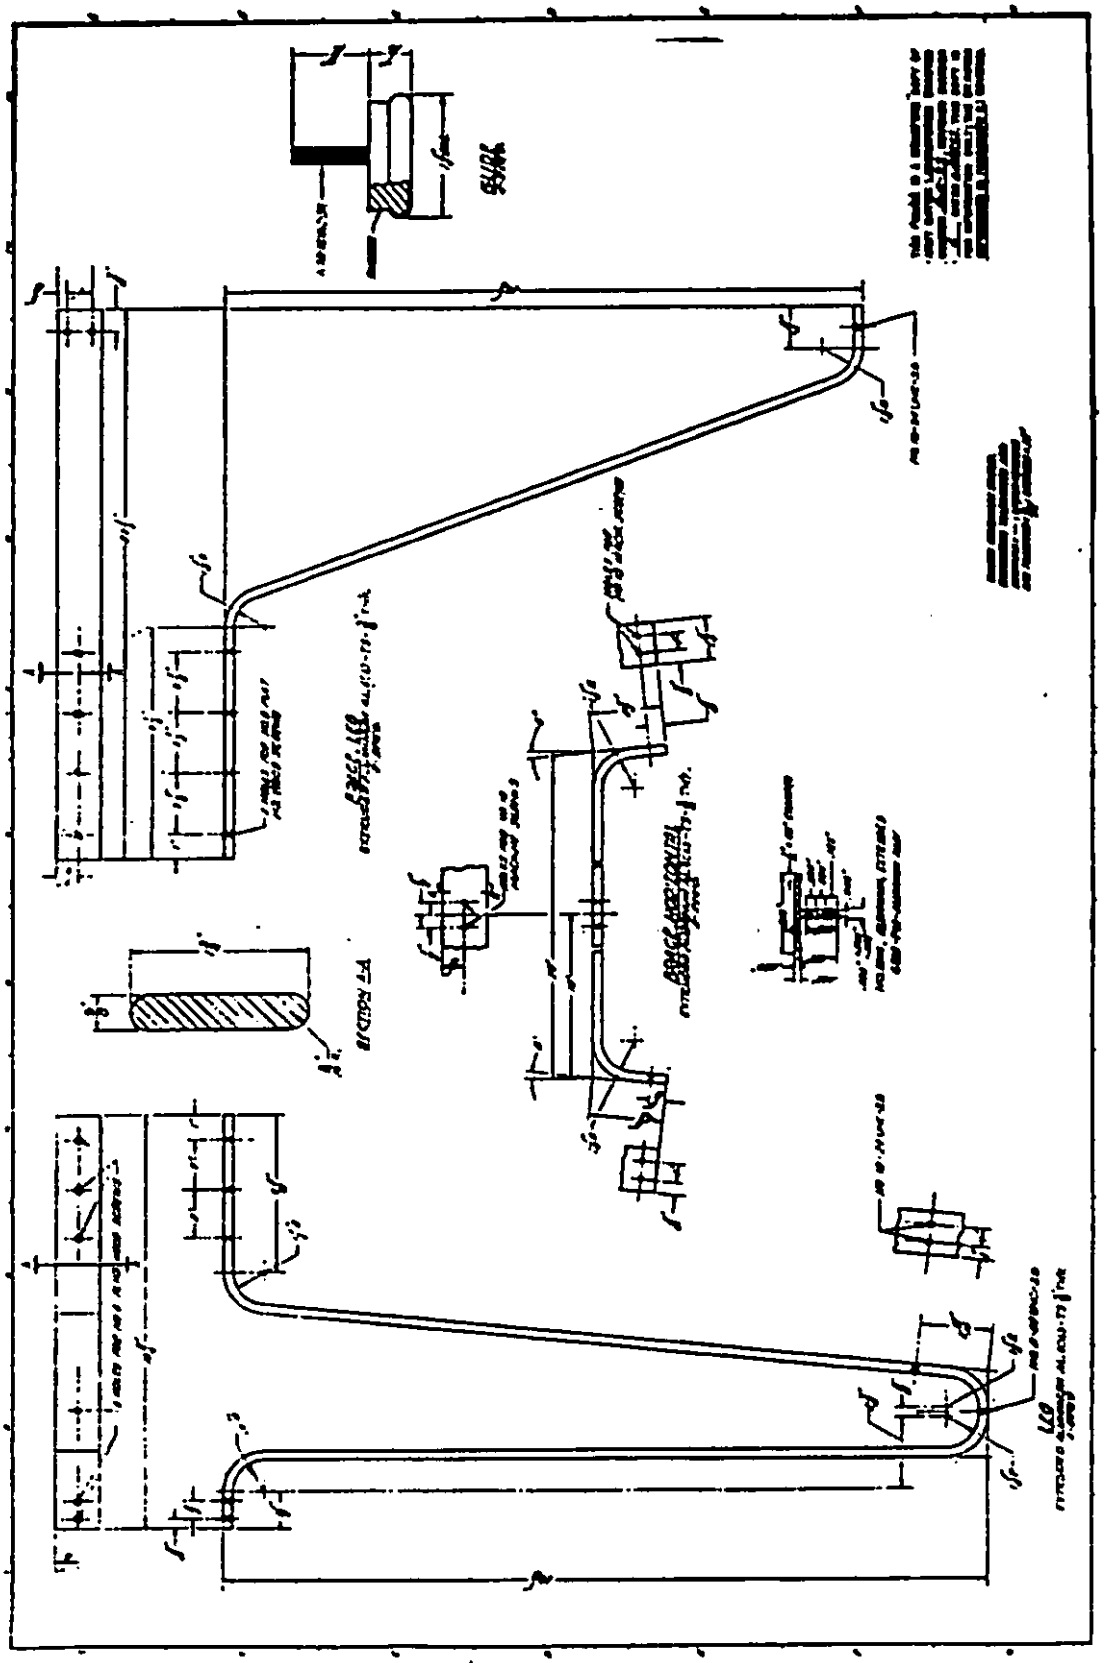


FIGURE 2. Table, dining (hospital, metal base)—details.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1964—701048/1327

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:01Z
Check the source to verify that this is the current version before use.