INCH-POUND


MIL-DTL-3943/305A
30 June 2007
SUPERSEDING
MIL-DTL-3943/305
22 August 2002

DETAIL SPECIFICATION SHEET

DECORATION, PUBLIC SAFETY OFFICER'S MEDAL OF VALOR, DEPARTMENT OF JUSTICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

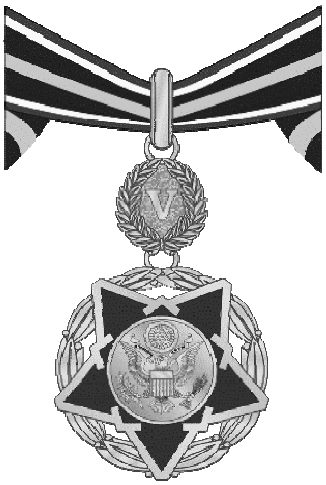

ASSEMBLED



OBVERSE



REVERSE



SUSPENSION PLATE



← View of ring as oval (after assembly)

← Flat view, before assembly

SUSPENSION RING

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:59Z
Check the source to verify that this is the current version before use.

MATERIAL:
PENDANT OBVERSE AND REVERSE: Gilding Metal or Red Brass
SUSPENSION PLATE AND SUSPENSION RING: Red Brass

FINISH:
PENDANT OBVERSE AND REVERSE : Enameled or Epoxied, Gold Plated, Matte Finished, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
SUSPENSION PLATE AND SUSPENSION RING: Gold Plated, Matte Finished, Polished Highlights, and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
PENDANT:
DIAMETER (circumscribed, excluding lug): 1-19/32 inches (REF)
THICKNESS (at a point coinciding with the border surrounding the seal on the obverse and the name plate on the reverse): 0.121 ± 0.010 inch
SUSPENSION PLATE:
HEIGHT: 25/32 inch (REF)
WIDTH: 23/32 inch (REF)
THICKNESS (at "V"): 0.085 ± 0.005
SUSPENSION RING (flat):
HEIGHT: 2 inches
WIDTH: 5/32 inch
THICKNESS: 0.067 ± 0.005 inch
SUSPENSION RING (assembled oval):
HEIGHT: 7/8 inch

NOTES

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The pendant shall have the following design elements:

- Blue enamel/epoxy inside star on the obverse shall match TIOH Hard Enamel Chip Number 20.
- There shall be 5 internal piercings between the star and wreath.
- The name platform on the reverse shall be raised, smooth, flat, and suitable for engraving.

3. When hard enamel is used, the material requirement shall be gilding metal. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

4. The suspension ring for the neck ribbon shall have the following design elements:

- Outside edges shall be flat.
- A full forcer shall be used on the inside area to obtain a "wedding ring" appearance.
- Suspension ring shall be formed into an oval with an inside depth of 1/4 inch to

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:59Z
Check the source to verify that this is the current version before use.

allow the neck ribbon to feed through. The ends of the suspension ring shall be centered on the reverse of the oval and hard soldered together.

5. The neck ribbon shall be in accordance with Figure 9 of MIL-DTL-3943.

6. The pendant rings shall be fabricated from 0.050 ± 0.002 inch nominal diameter wire of the same material and finish as the pendant. The ring used between the pendant and the suspension plate shall have an outside diameter of 0.325 ± 0.010 inch and shall be hard soldered to the reverse of the pendant at the top center of the wreath. The ring used between the suspension plate and the suspension ring shall have an outside diameter of 0.490 ± 0.010 inch and shall be attached using eye rings.

7. Eye rings shall be formed from 0.040 ± 0.002 inch nominal diameter wire of the same material and finish as the pendant ring and shall have an outside diameter of 5/32 ± 1/32 inch. The eye rings shall be soldered on the reverse of the suspension plate at the top and bottom of the vertical center line to allow the suspension plate to be connected to the pendant and the suspension ring. The bottom eye ring shall be a full ring to accommodate the free movement of the pendant. The top eye ring shall be a half ring and shall be hard soldered at each edge onto the suspension plate.

8. Decoration set shall consist of a regular size medal with a neck ribbon, a lapel button, and a service ribbon with ribbon attachment, all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6, with a Class 1, 1A, or 3 pad.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2007-078)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:59Z
Check the source to verify that this is the current version before use.