NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/305E(IH)
01 May 2024
SUPERSEDING
MIL-DTL-3943/305D(IH)
3 July 2019

DETAIL SPECIFICATION SHEET

DECORATION, PUBLIC SAFETY OFFICER'S MEDAL OF VALOR, U.S. DEPARTMENT OF JUSTICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein must consist of this specification sheet and the latest issue of MIL-DTL-3943.



PENDANT - OBVERSE



PENDANT - REVERSE



SUSPENSION WREATH



ASSEMBLED - OBVERSE



ASSEMBLED - REVERSE

DASH NUMBERS:
-1: Pendant
-2 Suspension Wreath
-3: Assembled

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy Number C-230)

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:59Z
Check the source to verify that this is the current version before use.

FINISH (-1 Obverse & Reverse and -2): 24K Gold Plated, Matte Finish, Polished Highlights and must match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT:
-1 (including lug): 1-27/32 inches (REF)
-2: 3/4 inch (REF)
-3: 2-1/2 inches ± 1/32 inch
WIDTH:
-1, -3: 1-5/8 inches (REF)
-2: 11/16 inch (REF)
THICKNESS:
-1 (across center): 0.120 inch ± 0.010 inch
-2 (at edge): 0.0675 inch ± 0.010 inch

PIERCINGS: -1 will be pierced in all shaded areas indicated above.


EPOXY: Epoxy enamel shall be applied to -1 as indicated below, and must match TIOH Hard Enamel Color Chip Number listed:

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Blue #20	Arms of star

Hard cloisonné enamel may be used in lieu of epoxy for -1. If hard cloisonné enamel is used, the required base material for -1 is Gilding Metal 95/5 (UNS Alloy Number C-210).

ATTACHING DEVICES:
ATTACHING DEVICE FOR PENDANT AND SUSPENSION WREATH: -2 must be secured to -1 by a hinge joint. The hinge will be 1/8 inch ± 1/64 inch long on either side by 3/32 inch ± 1/64 inch wide (see illustration below). The hinge must be hard soldered to the vertical center line of -2 1/32 inch + 1/64 inch – 0 up from its bottommost point. The arm for the hinge joint is integral to -1 and is 3/32 inch ± 1/64 inch high by 1/32 inch ± 1/64 inch wide by 3/32 inch ± 1/64 inch deep.
ATTACHING DEVICE FOR PENDANT AND NECKBAND: The suspension ring through which the neckband passes must be made of Red Brass 85/15 (UNS Alloy Number C-230) and conform to the dimensions specified below. The pendant ring will be hard soldered to the reverse of -2 as shown below, and in such a way that it is not visible when viewing the assembled decoration's obverse.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:59Z
Check the source to verify that this is the current version before use.

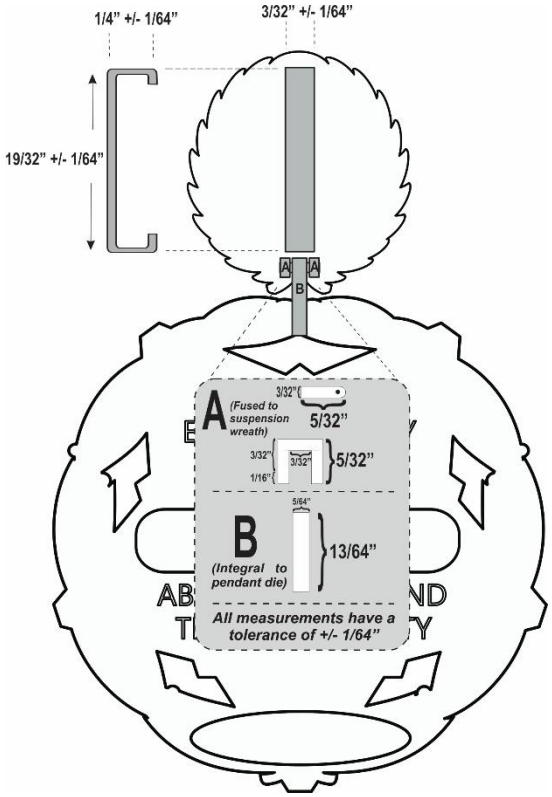

NECKBAND: The neckband must conform to Figure 9 in the latest version of MIL-DTL-3943, except that the manufacturer may deviate from this drawing by increasing the finished length of the neckband to 26 inches + 1/2 inch - 0.

DECORATION CASE: The decoration set will consist of a neckband with pendant and suspension wreath (assembled), a service ribbon with ribbon attachment, and a lapel button all packaged in a decoration case conforming to MIL-DTL-14633, Type IV, with a Class 1A pad. The following shall be inscribed on the top of the decoration case using three lines: (1) PUBLIC SAFETY (2) OFFICER'S (3) MEDAL OF VALOR

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. For -1 and -2, the manufacturer may deviate from MIL-DTL-3943 by using nickel underplating prior to plating with 24K gold.

3. The specification slash sheet for the neckband and service ribbon is MIL-DTL-11589/572.

4. The specification slash sheet for the lapel button is MIL-DTL-11484/289.

5. The specification slash sheet for the ribbon attachment is MIL-DTL-41819/46.

6. These items are not authorized for commercial sale and may be produced only under Government contract and at the request of the U.S. Department of Justice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:59Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-133)

Civil Agency:
DOJ - BJA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:59Z
Check the source to verify that this is the current version before use.