MIL-C-25830A(USAF)
Amendment 2
15 August 1961
Superseding
Amendment 1
25 August 1960

MILITARY SPECIFICATION

CLIP-IN SUBASSEMBLY MHU-20/C

This amendment forms a part of Military Specification MIL-C-25830A(USAF), dated 29 March 1960

Page 36, Step 129 of Table II: Delete the Note.

Pages 38, 39 and 40, Table III. Delete Table III in its entirety and substitute therefor the attached new Table III.

Page 41, paragraph 4.7.5. Delete third sentence and substitute therefor: "Operation of the mechanical lock system shall be checked in accordance with steps 1 and 7 of Table III."

Page 48, paragraph 4.7.6.6. Delete subparagraph b. and substitute therefor:

"b. The subassembly shall be tested in accordance with steps 1 and 7 of Table III subsequent to the completion of the vibration tests."

Page 48, paragraph 4.7.6.7. Delete last line and substitute therefor: "Mechanical Lock System Functional Test, Table III, steps 1 and 7."

Page 49: Remove figure 16 and substitute therefor corrected figure 16 which forms part of this amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:19Z
Check the source to verify that this is the current version before use.

TABLE III

MECHANICAL LOCK SYSTEM FUNCTIONAL TEST

STEP	OPERATION	RESPONSE
1. a.	A force of 85 pounds shall be applied to the outboard end of the 58J46420 drive crank.	The crank shall move to the fully unlocked position. All lock pins shall be fully retracted.
b.	Release the drive crank.	The lock pins shall return to the fully locked position.
2. a.	With the test load as defined in 4. 6e or 4. 6h on each MB-3A Rack, the lock pins fully inserted, actuate the manual release on all racks.	The hooks shall not open.
b.	Apply a down load of 210 pounds to the roller on the outboard end of the 58J46420 drive crank.	The lock pins shall not retract and the loads shall not release.
3. a.	With a test load as defined in 4. 6e or 4. 6h on each MB-3A Rack, and the lock pins fully inserted, pull the manual release on the lower right hand rack.	The load shall not release.
b.	Apply a down load of 210 pounds to the roller on the outboard end of the 58J46420 drive crank.	(I) The lock pins in the two left hand racks shall retract. (2) The lock pins in the two right hand racks shall not retract.
4. a.	With a test load as defined in 4. 6e or 4. 6h on each MB-3A Rack, and the lock pins fully inserted, pull the manual release on the lower left hand rack.	The load shall not release.
b.	Apply a down load of 210 pounds to the roller on the outboard end of the 58J46420 drive crank.	(1) The lock pins in the two right hand racks shall retract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:19Z
Check the source to verify that this is the current version before use.

TABLE III (Cont'd)

MECHANICAL LOCK SYSTEM FUNCTIONAL TEST

STEP	OPERATION	RESPONSE
4. b. (Cont'd)		(2) The lock pins in the two left hand racks shall not retract.
5. a.	With a test load as defined in 4. 6e or 4. 6h on each MB-3A Rack, and the lock pins fully inserted, pull the manual release on the upper right hand rack.	The load shall not release.
b.	Apply a down load of 210 pounds to the roller on outboard end of the 58J46420 drive crank.	(1) The lock pin in the upper right hand rack shall not retract. (2) The lock pins in the left hand racks and in the lower right hand rack shall retract.
6. a.	With a test load as defined in 4. 6e or 4. 6h on each MB-3A Rack, and the lock pins fully inserted, pull the manual release on the upper left hand rack.	The load shall not release.
b.	Apply a down load of 210 pounds to the roller on outboard end of the 58J46420 drive crank.	(1) The lock pin in the upper left hand rack shall not retract. (2) The lock pins in the right hand racks and in the lower left hand rack shall retract.
7. a.	With a test load as defined in 4. 6e or 4. 6h on each MB-3A Rack, move the roller on the outboard end of the 58J46420 drive crank to the full down position and hold. Pull the manual release on the lower right hand rack.	The hooks shall open and the load shall release.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:19Z
Check the source to verify that this is the current version before use.

TABLE III (Cont'd)

MECHANICAL LOCK SYSTEM FUNCTIONAL TEST

STEP	OPERATION	RESPONSE
7. (Cont'd) b.	Release the drive crank.	The lock pins in the left hand racks and in the upper right hand racks shall return to the locked position.
c.	Move the drive crank to the down position and pull the manual release on the upper right hand rack.	The hooks shall open and the load shall release.
d.	Release the drive crank.	The lock pins in the left hand racks shall return to the locked position.
e.	Move the drive crank to the full down position and hold. Pull the manual release on the lower left hand rack.	The hooks shall open and the load shall release.
f.	Release the drive crank.	The lock pin in the upper left hand rack shall return to the locked position.
g.	Move the drive crank to the down position, and pull the manual release on the upper left hand rack.	The hooks shall open the load shall release.
h.	Release the drive crank.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:19Z
Check the source to verify that this is the current version before use.

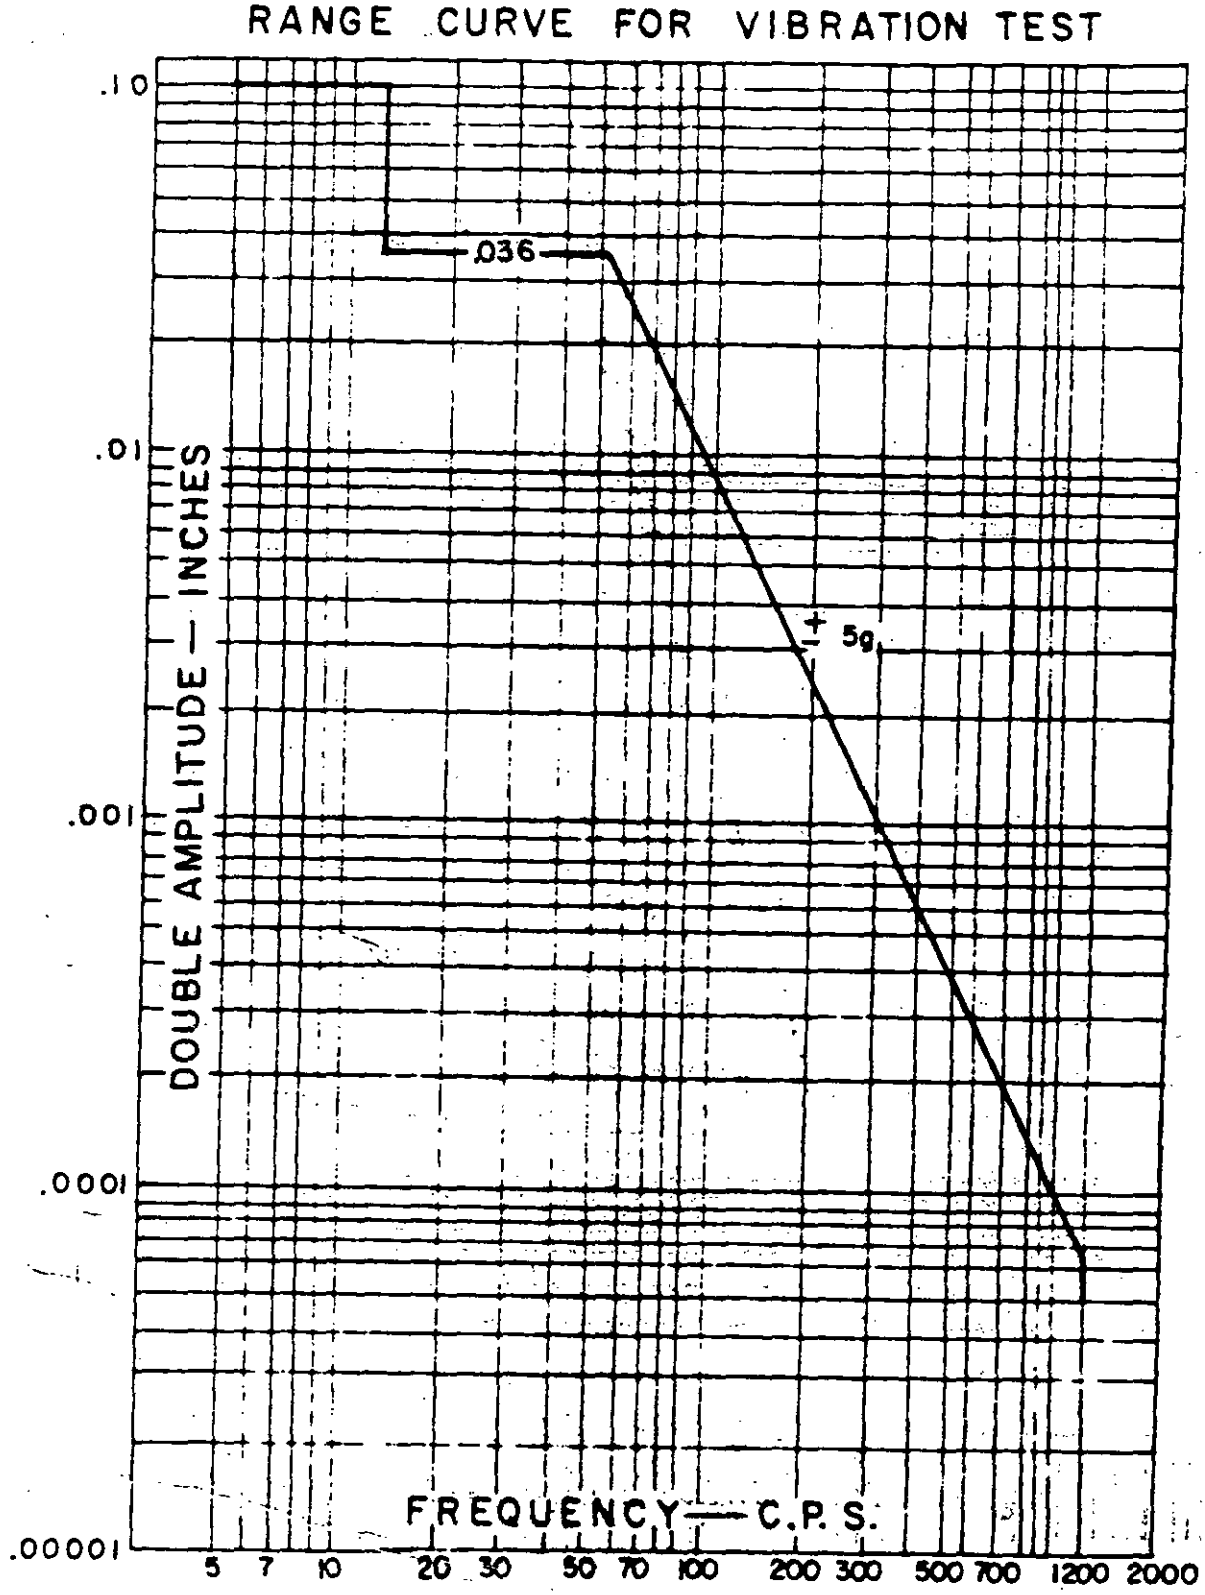


FIGURE 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:19Z
Check the source to verify that this is the current version before use.