MIL-H-25754B(USAF)
12 August 1976
SUPERSEDING
MIL-H-25754A(USAF)
30 July 1964

MILITARY SPECIFICATION

# HOOD, WINTER, KNIT, WOOL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the requirements for a hood, winter, knit, wool, used as a component of the Air Force survival kits.

* 1.2 Classification. This specification covers the requirements for one type of hood in sizes small, medium, and large as specified (see 6.2).

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

| | |
|---|---|
| L-P-378 | Plastic Sheet And Strip, Thin Gage, Polyolefin |
| V-T-276 | Thread, Cotton |
| DDD-L-20 | Label; For Clothing, Equipage, And Tentage, (General Use) |
| PPP-B-566 | Boxes, Folding, Paperboard |
| PPP-B-636 | Boxes, Shipping Fiberboard |
| PPP-B-665 | Boxes, Paperboard, Metal Edged And Components |
| PPP-B-676 | Boxes, Set-Up |
| PPP-T-60 | Tape, Packaging, Waterproof |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to San Antonio Air Logsitics Center, Engineering Division, ATTN: MMEDO, Kelly AFB TX 78241 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

| | |
|---|---|
| FED-STD-191 | Textile Test Methods |
| FED-STD-751 | Stitches, Seams, And Stitchings |

Military

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures And Tables For Inspection By Attributes |
| MIL-STD-129 | Marking For Shipment And Storage |
| MIL-STD-1491 | Glossary Of Knitting Imperfections |

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S. DEPARTMENT OF AGRICULTURE

Methods of Test for Grades of Wool Top

(Application for copies should be addressed to the U.S. Department of Agriculture, Agriculture Marketing Service, Washington, D.C. 20402.)

RULES AND REGULATIONS UNDER THE WOOL PRODUCTS LABELING ACT OF 1939

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington D.C. 20402.)

3. REQUIREMENTS

* 3.1 Standard sample. The cloth shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

* 3.2 First article approval. The requirement for First Article will be as specified by the Procuring Activity (see 6.2).

* 3.3 Materials.

* 3.3.1 Wool yarn. The yarn for knitting and cover stitching the hood shall be made from long staple, fleece or pulled sheep's wool, not lower in grade than 56's U.S. Standard. The wool shall be carded, combed, spun, and twisted into two-ply worsted yarn. The use of noils, laps or any other wool manufacturing by products is prohibited. The lubricant used in spinning the yarn shall not contain any oils which are likely to turn rancid or discolor the yarn or fabric in storage.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

* 3.3.2 Thread. The thread for all sewing operations shall be cotton, not finer than 50/3, conforming to type IA3 of V-T-276 and shall be vat dyed to match sage green USAF color shade No. 1509 (see 6.3). The thread shall have good colorfastness to laundering and perspiration.

* 3.4 Design. The hood shall be knitted as shown on Figures 1 and 2.

* 3.5 Color. Unless otherwise specified, the color of the hoods shall match sage green USAF color shade No. 1525 (see 6.3). The color shall be obtained by stock or yarn dying using chrome or acid dyes.

* 3.6 Knitting. Knitting shall be made on a circular or flat bed machine with not less than two ends of two-ply worsted yarn in each feed. The top of hood shall be knitted with 2-1/2 inches of a 1 by 1 rib stitch followed with 6 inches of half-cardigan stitch for the small size, 6-1/4 inches for the medium size, and 6-1/2 inches for the large size. The bottom of the hood shall be knitted with a 1 by 1 rib stitch for 6-3/4 inches, finished with a racked nonraveling selvage edge.

* 3.7 Fabrication. The hoods may be knitted seamless or may be seamed in the center of the back, using stitch type 504 and cover stitch type 406. If the hood is knitted with selvage edges, the seam may be made using stitch type 502. In either case, the ends of the seam shall be securely tacked.

* 3.7.1 Top. The top of the crown shall be formed by cutting three V-shaped darts (on each side of the tubing) 2-1/4 inches deep, finished as shown on Figure 1, to form a six-dart top. The darts shall be joined with three cross seams by first seaming with stitch type 504 and then cover seaming with stitch type 406.

* 3.7.2 Front opening. The hood shall have a front or face opening as shown on Figure 2 and formed as follows: An arc-shaped slit, with the ends curving upwards shall be cut in half cardigan section. The lower or center part of this slit shall be 1/2 inch above the bottom edge of the half cardigan section. The length of the slit, measuring straight across from end to end, (not on the curve) shall be 6-1/2 inches. The depth of the arc shall be 2-1/4 inches. A 1 by 1 ribbed crescent shaped piece, 2-1/4 inches wide at the center, shall be stitched to the lower edge. This piece shall have a racked selvage edge at the outer edge. The curved edge, which shall be shaped to fit the slit, shall be first seamed onto the hood with stitch type 504, and then cover seamed with stitch type 406. The top edge of the slit shall be first edged with stitch type 504, or equal, then folded to the inside to a depth of 1-1/4 inches at the center and blindstitched with stitch type 504, or equal, using worsted yarn for the cover thread. Both ends of the opening shall be securely tacked.

* 3.8 Stitches, seams and stitchings. Stitching types shall conform to FED-STD-751. All seaming and stitching shall be performed with not less than 10 nor more than 14 stitches per inch. Stitch type 504 shall be made with cotton thread; stitch type 502 shall be made with worsted yarn, and stitch types 503 and 406 shall be made with worsted yarn and cotton thread. Other stitch types equivalent to those specified will be acceptable upon approval by the contracting officer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

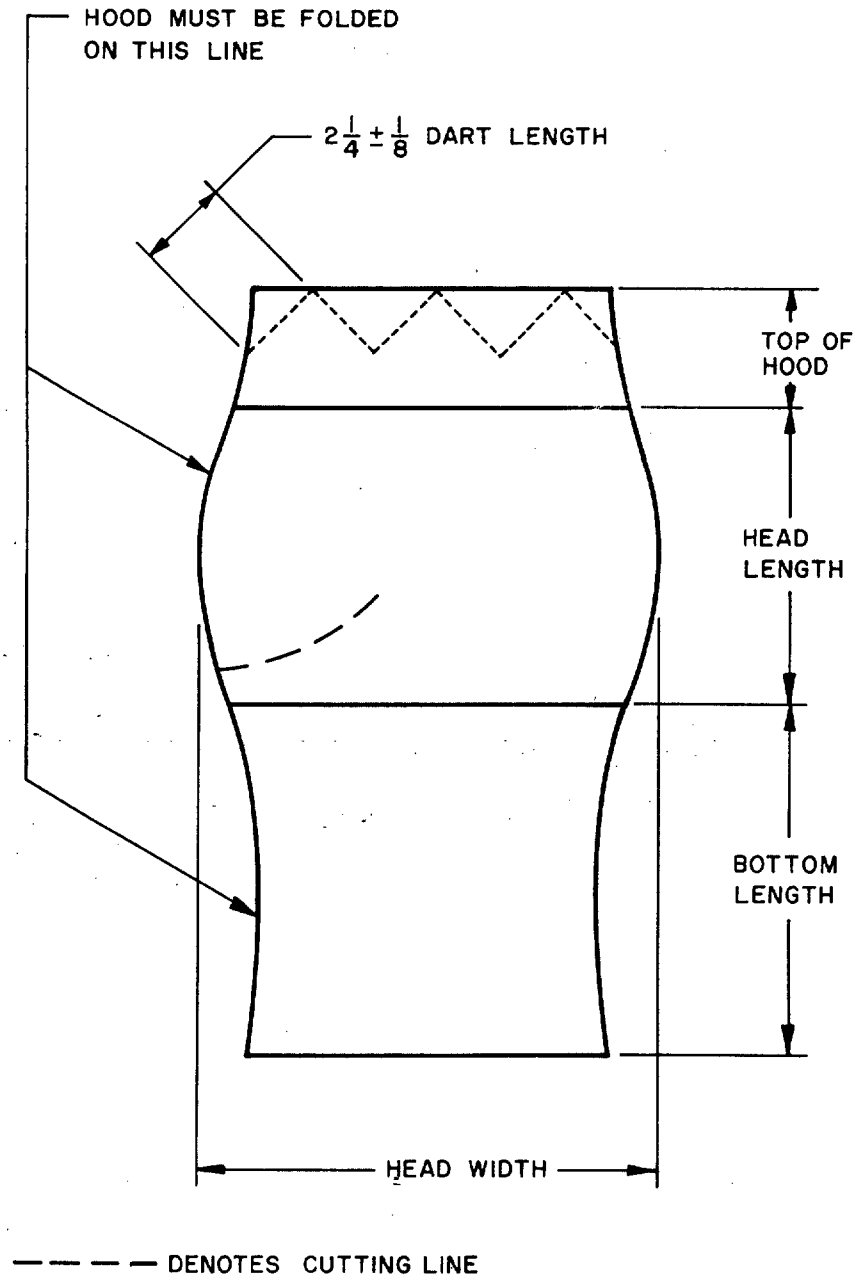



FIGURE I. DESIGN OF HOOD



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

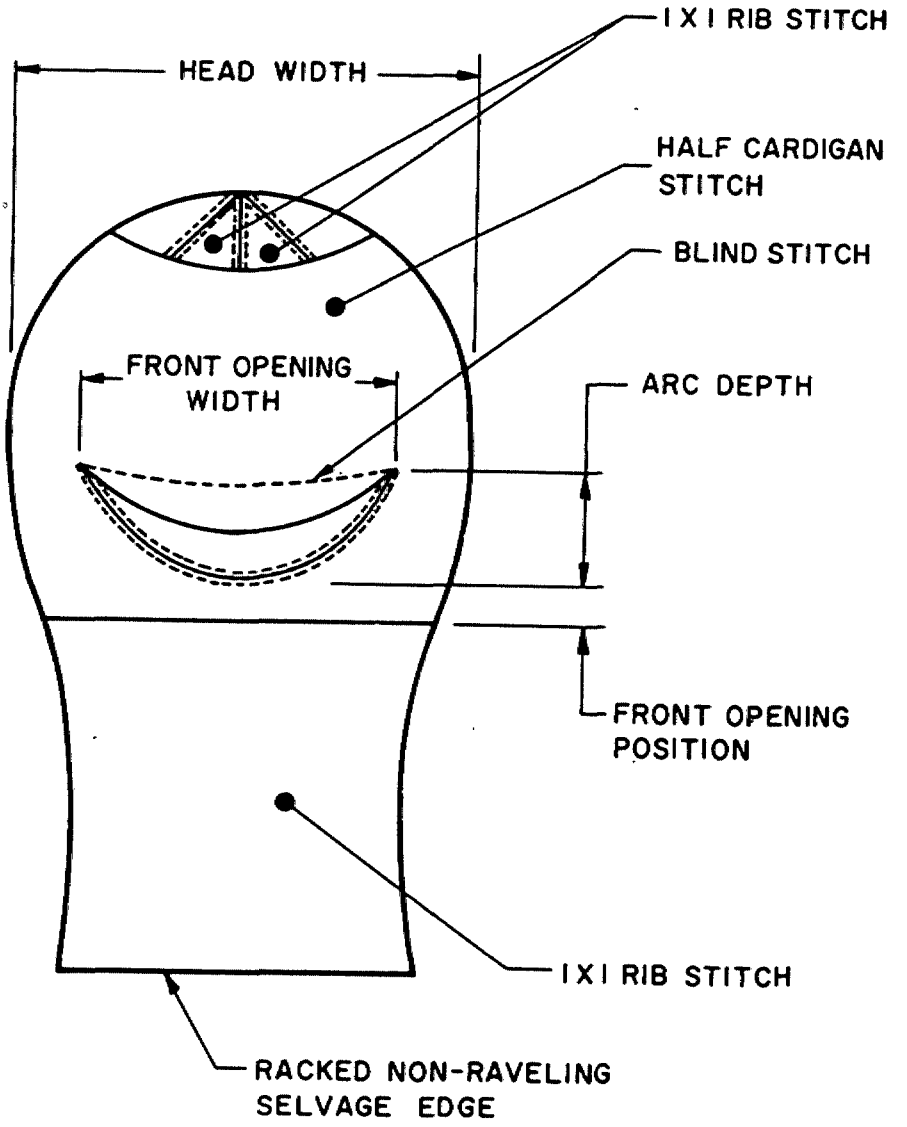



FIGURE 2 - KNITTING OF HOOD



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

* 3.9 Performance.

* 3.9.1 Matching. The color shall match the approved standard shade when tested as specified in Section 4.

* 3.9.2 Colorfastness. The color shall show good colorfastness to crocking and perspiration when tested as specified in Section 4.

* 3.9.3 Wales and courses. The construction of the cloth shall conform to the minimum requirements of Table I when tested as specified in Section 4.

TABLE I - CONSTRUCTION OF CLOTH

| Direction | Stitch Type | |
|---|---|---|
| | Half Cardigan | 1 by 1 Rib |
| Wales per inch | 5 | 8 |
| Courses per inch | 11 | 12 |

* 3.9.4 PH. The pH of the water extract or the finished cloth shall be no less than 4.0 nor more than 8.0 when tested as specified in Section 4.

* 3.9.5 Wool content. The finished cloth shall contain not less than 95.0 percent wool when tested as specified in 4.2.

* 3.9.6 Weight. The weight of the finished hoods shall conform to the require ments of Table II. The weight is given in pounds per one dozen hoods. A tolerance of plus or minus 2 ounces is permitted.

TABLE II - WEIGHT OF FINISHED HOODS

| Size | Weight |
|---|---|
| Small | 2.25 |
| Medium | 2.50 |
| Large | 2.75 |

* 3.9.7 Extractable matter. The extractable shall not exceed 5 percent of total weight.

* 3.9.8 Measurements. The finished hoods shall conform to the measurements listed in Table III.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

TABLE III - MEASUREMENTS ( IN INCHES)

| Description | Measurement 1/ | | | Tolerance (Plus or Minus) |
|---|---|---|---|---|
| | Small | Medium | Large | |
| Top of hood (see 3.6) | 2-1/2 | 2-1/2 | 2-1/2 | 1/4 |
| Dart - length (see 3.7.1) | 2-1/4 | 2-1/4 | 2-1/4 | 1/4 |
| Head - Length (see 3.6) | 6 | 6-1/4 | 6-1/2 | 3/8 |
| Head - width | 8-1/4 | 8-3/4 | 9-1/2 | 1/4 |
| Bottom - length (see 3.6) | 6-3/4 | 6-3/4 | 6-3/4 | 3/8 |
| Front opening position (see 3.7.2 | 1/2 | 1/2 | 1/2 | 1/8 |
| Front opening - width (see 3.7.2) | 6-1/2 | 6-1/2 | 6-1/2 | 3/8 |
| Front opening - arc depth (see 3.7.2) | 2-1/4 | 2-1/4 | 2-1/4 | 1/8 |
| Front opening - hem (see 3.7.2) | 1-1/4 | 1-1/4 | 1-1/4 | 1/4 |
| Over-all length | 15-1/4 | 15-1/2 | 15-3/4 | 1/2 |

1/ All measurements shall be taken with the hood in the relaxed condition.

* 3.10 Finish. The finished hoods shall be steam pressed without application of undue stresses.

* 3.11 Identification of product.

* 3.11.1 Contractor's label. A 1-5/16 inch by 2-3/4 inch, contractor's label conforming to type I, class 4 of DDD-L-20 shall be securely sewn to the inside at the top of the crown, positioned to the right or left of the center seam and below the darts of each hood. The label shall be stitched vertically along both ends not less than 1/8 inch nor more than 1/4 inch from the ends of the label. The label shall be attached slack so that the material of the hood under the label may be stitched approximately 1/2 inch without constriction. The label shall contain the following information:

Hood, Winter, Knit, Wool
MIL-H-25754B(USAF)
Contract or Order No.*
Size*
Stock No.*

* The manufacturer shall include the applicable data.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

* 3.11.2 Wool contents label. The hood shall be marked to conform to the Wool Products Labeling Act of 1939. The legend may be included in the contractor's label.

* 3.12 Workmanship. The hoods shall be clean, well made, free from holes, drop stitches, oil stains, and any other defects which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Testing of components. The methods of testing components shall be in accordance with FED-STD-191, whenever applicable, and as specified in 4.2.1 and 4.2.2.

* 4.2.1 Wool grade (scoured wool). The grade of wool, in the scoured form, shall be determined by visual comparison with the applicable U.S. Standard prior to dyeing, picking, and carding. In the event of a dispute resulting from this comparison, the wool grade shall be determined by a width method (wedge). The examination for grade shall be performed on a composite sample of 1 pound for each 10,000 pounds or fraction thereof in the lot. The lot shall be unacceptable if the sample does not conform to the requirements of 3.3.1.

4.2.2 Wool grade (top). The grade of wool in top form shall be determined by comparison with the applicable U.S. Standard. In the event of a dispute, the wool grade shall be determined by the width method. The unit of product shall be 1 yard of undyed top. The sample size (number of units of product) shall conform to Table IV. The results of each unit of product shall be reported separately. The lot shall be unacceptable if a single unit of product fails to meet the required grade.

TABLE IV - SAMPLE SIZE (UNITS)

| Lot Size (Pounds or Units) | Sample Size |
|---|---|
| 800 or less | 2 |
| 801 to 22,00 | 3 |
| 22,001 an/over | 5 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

* 4.2.3 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to test items to determine the validity of the certification.

* 4.2.4 First article inspection. When required, the first article of the finished cloth submitted in accordance with 3.2 shall be visually inspected for appearance, color and finish. The sample shall be tested for physical and chemical properties in accordance with the methods specified in 4.5.

* 4.2.5 Inspection. Inspection shall be performed in accordance with MIl-STD-105, except where otherwise indicated.

* 4.2.6 In-Process inspection. Inspection shall be made at any point during any phase of the manufacturing process to assure that no laps, noils, or any other wool manufacturing by-products are used (see 3.3.1). The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

* 4.3 Examination of the end item. The finished hood shall be examined for the defects specified in 4.3.1 and 4.3.2. The lot size shall be expressed in units of one hood. The unit of product for the examinations shall be one hood. The acceptable quality levels shall be 6.5 defects per 100 units (one class) for 4.3.1 and 4.0 defects per 100 units (one class) for 4.3.2. The inspection levels shall be I of MIL-STD-105 for 4.3.1 and S-3 of MIL-STD-105 for 4.3.2.

* 4.3.1 Visual examination. The finished hood shall be visually examined for the following defects in accordance with MIL-STD-1491:

| Examine | Defect |
|---|---|
| Material | Hole, run, dropped stitch, cut or tear, or thin or uneven fabric |
| | Burrs or shives (accumulation) |
| | Mend |
| | Slubby yarn more than three times the thickness of the normal yarn |
| | Spot, stain, or streak |
| | Knots protruding from the surface |
| | Racked selvage (where applicable) missing |
| Seams and stitching | Incorrect stitching type |
| | Cover stitching omitted |
| | End of seam not securely tacked |
| | Open seam or skipped or broken stitches |
| | Raw edge more than 1/4 inch |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| | Needle chew |
| | Loose stitch tension resulting in loosely secured seams |
| | Tight stitch tension |
| | Less than 10 or more than 14 stitches per inch |
| Label | Omitted, illegible, misplaced, incorrect legend, or improperly attached |

4.3.2 Examination of finished dimensions. The finished hood shall be examined for finished measurement defects. Any measurement less than specified (including tolerance) or any measurement more than specified (including tolerance) shall be classified as a finished measurement defect. An approximately equal number of units shall be measured from each shipping container selected for visual examination.

* 4.4 Examination of preparation for delivery. An examination shall be made to determine if the packaging, packing, and marking requirements of Section 5 of this specification have been met. The lot size shall be the number of containers in the inspection lot. The sample unit shall be one shipping container fully packed and selected just prior to the closing operation. The inspection level shall be S-2 of MIL-STD-105, and the acceptable quality level shall be 2.5 defects per 100 units. Shipping containers fully prepared for delivery shall be examined for the following defects:

| Examination | Defect |
|---|---|
| Markings (exterior or interior | Incorrect; missing; illegible; of improper size, location, sequence, or method of application; or size on item marking not in conformance with the size shown on the interior or exterior package. |
| Materials | Any nonconforming component; or component missing, damaged, or otherwise defective, affecting serviceability; or any visible mend. |
| Workmanship | Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, etc or bulging or distortion of containers. |
| Contents | Number per container more or less than specified or actual number in container is less than the number marked on container. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

* 4.5 Testing of the end item. The method of testing shall be in accordance with FED-STD-191, wherever applicable, and as specified in Table V. The physical and the chemical values specified apply to the average of the determinations made on a unit of product for test purposes as specified in the applicable test methods. The lot size shall be expressed in units of one hood. Except for weight, the unit of product shall be one hood. The unit of product for weight shall be 12 hoods of each size in the lot with a sample size of one regardless of lot size. The sample size and lot size (pound) shall be in accordance with Table IV. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified.

TABLE V - TESTING OF END ITEM

| Characteristic | Requirement Paragraph | Test Method FED-STD-191 |
|---|---|---|
| Wool, worsted yarn | 3.3.1 | 2100 1/ |
| Yarn ply | 3.3.1 | Visual |
| Color | 3.3 | See 4.5.1 |
| Type of knit | 3.4 | Visual |
| Colorfastness | 3.9.2 | |
| Dry cleaning | | 5622.2 |
| Crocking | | 5651 |
| Perspiration | | 5680 |
| Wales per inch | 3.9.3 | 5070 |
| Courses per inch | 3.9.3 | 5070 |
| pH | 3.7.4 | 2811 |
| Extractable matter | 3.9.7 | See 4.5.2 |
| Weight | 3.9.6 | Commercial Scale |
| Wool content | 3.9.5 | 2101 |

1/ The contractor's certificate of compliance will be acceptable for this characteristic.

4.5.1 Color matching. The color shall match the approved standard shade under natural (North sky) daylight or artificial daylight having a color temperature of 7,500 degrees Kelvin and shall be a good approximation of the standard shade under incandescent lamp light at 2,00 Kelvin (see 6.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

* 4.5.2 Extractable matter. A specimen of approximately 10 grams shall be taken for the test. Particular care shall be taken to prevent the loss of fibers in the treatments. The test shall be performed as follows: Dry the specimen to constant weight at 221 degrees to 230 degrees Fahrenheit (F) and weight. This result gives the weight of the dry specimen. Then extract the specimen in a soxhlet apparatus for at least 20 extractions with chloroform. Evaporate the chloroform from the extract, and dry the residue to constant weight at 221 degrees to 230 degrees Fahrenheit. The results of the analysis are obtained by the following calculation:

$$\text{Extractable matter (percent)} = \frac{\text{Residue} \times 100}{\text{Weight of the dry specimen}}$$

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each hood shall be folded in ha ...d placed in a heat-sealed bag (see 5.3.1) that is made of a minimum of .0015-inch thick polyethylene conforming to type I, grade A, B, or C, finish 1 or 2 of L-P-378. Prior to or during the heat-sealing operation, excess air shall be expelled from the bag to the extent necessary to permit packaging in the intermediate container.

5.1.1.1 Intermediate packaging. Ten hoods of one size only and individually packaged as specified shall be placed in a box conforming to PPP-B-566, PPP-B-636, PPP-B-665, and PPP-B-676. The inside dimensions of the box shall be approximately 9 inches in length, 9 inches in width, and 5 inches in depth. The box shall be secured with gummed tape.

5.1.2 Level C. Hoods shall be packaged in accordance with Industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twelve boxes, containing 120 hoods (ten hoods in each box) of the same size and packaged as specified, shall be packed in a box conforming to class 2, compliance symbol V3c or V3s, style RSC of PPP-B-636. The inside dimensions of the box shall be approximately 19 inches in length, 19 inches in width, and 15-1/2 inches in depth. The seams, corners, and manufacturer's joint of each box shall be sealed by applying olive drab color, 3-inch (minimum) width cloth tape conforming to type III, class 1 of PPP-T-60. Each shipping container shall be closed and reinforced in accordance with the appendix of the container specification. Toward the end of the contract or when the quantity of hoods of the same size is less than the quantity required per shipping container, mixed sizes may be packed in the same shipping container.

5.2.2 Level B. Twelve boxes, containing 120 hoods (ten hoods in each box) of the same size and packaged as specified, shall be packed in a box conforming to type I or II, class 1, style RSC of PPP-B-636. The inside dimensions of the box shall be approximately 19 inches in length, 19 inches in width, and 15-1/2 inches in depth. Shipping containers shall be closed by applying adhesive (glue) throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top with adhesive. Toward the end of the contract or when the quantity of hoods of the same size is less than the quantity required per shipping container, mixed sizes may be packed in the same shipping container.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Hoods, packaged as specified in 5.1 shall be packed in a manner to insure acceptance by the carrier and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules of carriers or regulations as applicable to the mode of transportation.

5.3 Marking. Interior and exterior containers shall be marked in accordance with the applicable requirements of MIL-STD-129.

5.3.1 Additional marking. Prior to heat sealing the bag (see 5.1.1), a paper label shall be placed in each bag so that it is readable through the polyethylene. The label shall contain the stock number, the nomenclature, and the quantity of hoods contained therein.

5.3.2 Mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side a white paper label 5 inches by 4 inches with the words "mixed sizes" plainly printed thereon and under these words shall be legibly printed the correct quantity and sizes of hoods contained therein.

6. NOTES

6.1 Intended use. The hoods covered by this specification are intended as a component of the Air Force survival kits.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of the specification.

b. Requirements for first article. (See 3.2)

c. Size (see 1.2).

d. Selection of applicable levels of packaging and packing. (See 5.1 and 5.2)

6.3 USAF color samples. Samples of USAF color shades may be obtained from the procuring activity.

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Preparing Activity:
Air Force - 99

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/6523

Project No. 8415-F924



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   [ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:14Z
Check the source to verify that this is the current version before use.