MIL-J-25718B(USAF)
14 November 1969
SUPERSEDING
MIL-J-25718A(USAF)
20 January 1964

MILITARY SPECIFICATION

JUG, INSULATED, TYPE CNU-2/C

1. SCOPE

1.1 Scope. This specification covers one type of electrically heated container, designated Type CNU-2/C, for storing and serving beverages aboard long range aircraft.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-S-763	Steel Bars, Shapes, and Forgings - Corrosion Resisting
QQ-S-766	Steel Plates, Sheets and Strip - Corrosion Resisting
PPP-B-636	Box, Fiberboard

Military

MIL-P-116	Preservation, Methods of
MIL-W-5088	Wiring, Aircraft, Installation of
MIL-S-8512	Support Equipment, Aeronautical, Special, General Specification for the Design of
MIL-W-8611	Welding, Metal Arc and Gas, Steels, and Corrosion and Heat Resistant Alloys, Process for

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:09Z
Check the source to verify that this is the current version before use.

MIL-STD-147	Palletized and Containerized Unit Loads, 40 Inch x 48 Inch Pallets, Skids, Runners, or Pallet Type Base
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-794	Part and Equipment, Procedures for Packaging and Packing of
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing, with Appropriate Test Methods
MS33586	Metals, Definition of Dissimilar

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Bureau of Standards

Handbook H28	Screw-Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), this specification provides for first article testing and inspection. A first article comprises a preproduction model or initial production sample; approval involves testing and evaluating the first article for conformance with the requirements herein before, or in the initial stage of, production under a contract. Approval of the first article shall not relieve the supplier of the responsibility to furnish equipment in accordance with the requirements of this specification.

3.2 Design. The jug shall be designed to conform to Figure 1. It shall consist of an inner and outer case to form the body. The space between the cases shall be filled with insulation to provide the proper heat retention characteristics. The entire assembly shall provide for maximum sanitation and ease of cleaning. The total number and length of joints and radii shall be held to a minimum. Where necessary and where normally in contact with liquids, internal radii shall be a minimum of 3/16 inch. The top of the jug shall have a removable cover or lid that has a carrying handle. A spigot shall be provided for draining the contents. Contamination of the contents by foreign materials collecting on top of the container body shall be minimized by either sloping the top of the jug from the inner periphery to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:09Z
Check the source to verify that this is the current version before use.

outer periphery or by a cover and gasket which are both sufficiently large enough to cover the entire top of the container body. The jug shall be equipped with thermostatically controlled, electrical heating elements. The design shall permit, where possible, disassembly, reassembly, and service maintenance by tools and maintenance equipment normally available as commercial standards. Special and commercial standard tools are defined in MIL-S-8512.

3.2.1 Capacity. The jug shall have a minimum internal capacity of two gallons.

3.2.2 Weight. The weight of the complete jug, including the heating elements, shall not exceed 16 pounds.

3.2.3 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. All parts shall be manufactured to such standards as will permit replacement without modification of parts or equipment.

3.2.4 Material. All material used in the manufacture of the jug shall be as specified for each component, shall be new, and of the quality necessary to meet the requirements specified herein.

3.2.5 Threads. All threaded parts shall be in the inch system and shall conform to Handbook H28.

3.3 Construction. The jug shall be complete and ready for use when connected to a suitable source of power. The jug shall be fabricated of parts which are sound and free from repair. Defective parts shall not be reclaimed for use. Joints, where necessary, shall be smooth, even, and made by inert gas shielded arc welding in accordance with MIL-W-8611.

3.3.1 Fastening devices. All screws, pins, and similar parts shall be installed with means to prevent loss of tightness. Those subject to removal or adjustment shall not be swaged, peened, or otherwise permanently deformed.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless suitably protected against electrolytic corrosion. Dissimilar metals are defined in MS33566.

3.3.3 Surfaces. The inner case of the jug shall have an electro-polish finish. The outer case and cover shall have an electro-polish finish or standard polish No. 4 or No. 6 of QQ-S-766.

3.4 Components. The insulated jug shall consist essentially of a container body, cover, spigot, insulation and electrical equipment to meet the requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:09Z
Check the source to verify that this is the current version before use.

3.4.1 Container body. The inner and outer cases shall be fabricated of not less than 0.025 inch thick corrosion-resistant steel conforming to class 201, 202, 301, 302, or 304, condition A of QQ-S-766. The sides of the outer case shall be reinforced by stiffening ribs or any other suitable means to prevent buckling. A spigot tube shall connect with the inner case, shall extend through the outer case, shall be straight and smooth, and have provisions for attaching the spigot. Corrosion-resistant steel surfaces shall be finished in accordance with 3.3.3.


3.4.2 Insulation. The space between the inner and outer cases of the container body and cover shall be lined with sufficient insulation to enable the container to satisfy the requirements of this specification. The insulation shall be polyurethane foam, glass wool, or equal and arranged so that it will remain in place throughout the life of the jug.

3.4.3 Spigot. The spigot shall be quick-flow, push type with provisions to prevent accidental discharge of liquid by bumping and shall be attached to the spigot adapter on the container body. The spigot shall be easily attached, detached, assembled, and disassembled for cleaning and sterilization. The spigot shall be of simple construction and shall contain a minimum number of parts and a minimum number and length of joints. The metal parts of the spigot shall be made of corrosion-resistant steel, conforming to class 202, 302, or 304, condition A of QQ-S-763 or of nickel-chromium plated brass. The parts of the spigot that must be handled to operate the flow control mechanism shall be made of a suitable non-metallic material of low thermal conductivity, having a minimum impact strength of 0.6 foot-pound per square inch of notch (Izod). If a lock-ring, push-button arrangement is used, the lock ring shall be threaded to the spigot barrel with a standard acme thread conforming to Handbook H28. To facilitate cleaning and sanitation, the configuration shall provide maximum ease of disassembly and reassembly and minimum accumulation of food deposit.

3.4.4 Cover. The cover shall be fabricated of the same material as the container body. The cover shall have suitable quick connect and disconnect latches or clamps for attaching the cover to the body. The latches or clamps shall be specifically approved by the procuring activity. The cover shall have an indentation to accommodate the handle when it is not in the carrying position. A suitable diameter metal tube, fabricated of the same material as the container, shall be inserted through the cover to equalize the pressure inside the container with the atmosphere.

3.4.5 Handle. A handle as shown in Figure 1, shall be provided on the cover and shall be fabricated of either round or flat stock steel. If round stock is used, it shall conform to class 202, 302, or 304, condition A of QQ-S-763 with cold rolled surfaces. The handle shall have a minimum diameter of 3/16 inch except for the hand grip which shall have a minimum diameter of 3/8 inch. The hand grip shall have a minimum length of 3 1/2 inches. If flat stock is used, it shall conform to class 201, 202, 301, 302, or 304, condition A of QQ-S-766 with standard polish on both sides. The handle shall have a minimum thickness of 0.055 inch and a minimum width of 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:09Z
Check the source to verify that this is the currentversion before use.

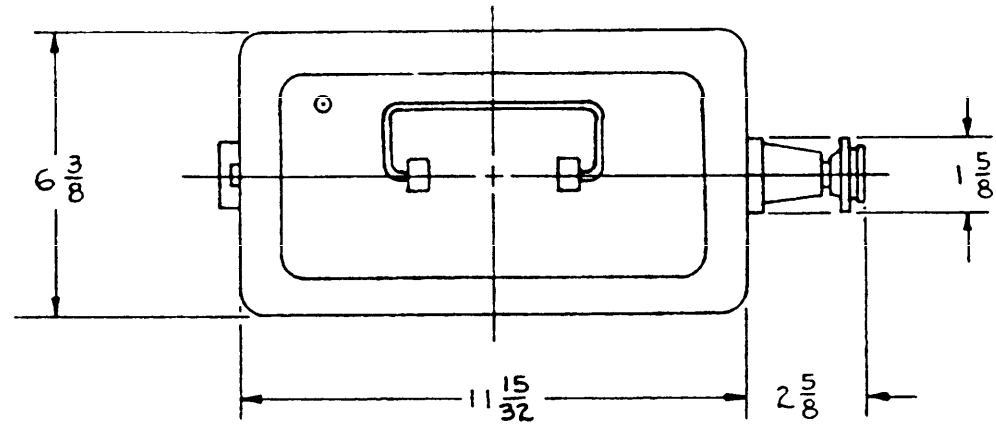

WEDJIT STUD NO. AR2-3-4,
ADAMS RITE MFG. CO.,
MATL: 2330 STEEL OR EQUAL,
FINISH: CADMIUM.

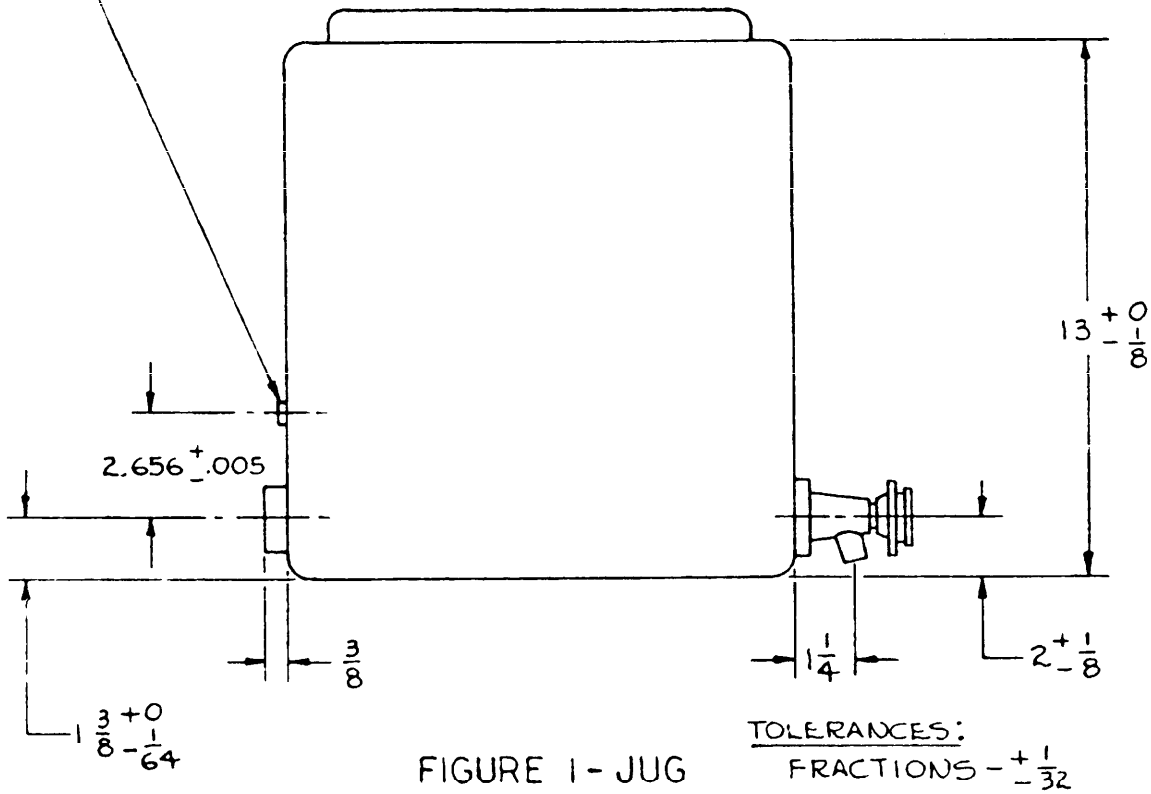


FIGURE 1 - JUG

TOLERANCES:
FRACTIONS - ±1/32
DIMENSIONS ARE IN INCHES.

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:09Z
Check the source to verify that this is the current version before use.

3.4.6 Dry-ice well. When specified (see 6.2), a dry-ice well shall be provided in the container cover or lid. The well shall be fabricated of the same material as the cover and shall have sufficient capacity to hold at least 1 1/2 pounds of dry ice. A screw-cap shall be provided on the lid for adding the dry ice.

3.4.7 Washers, gaskets and seals. The materials used for the lid gasket, spigot washer, and spigot shaft seal shall not become sticky in normal service, shall not swell to limit the functionability of the spigot, and shall not be attacked by or impart toxic properties, tastes, or odors to liquid foods during the service life of the container.

3.4.8 Thermostat. The jug shall have a thermostat of suitable power rating to maintain the temperature of the contents within the range specified when the container is operating at any point within the ambient temperature range of plus 10 degrees to plus 180 degrees Fahrenheit. The thermostat shall be either a snap-action type or shall be equipped with a condenser of 0.5 MFD, 100-volt, direct current capacitance to insure proper operation of the thermostat and to prevent burning and fusion of the thermostat contacts.

3.4.9 Electrical. All wiring and electrical connections shall be made in accordance with the applicable portions of MIL-W-5088. The jug shall conform to the electrical interference requirements of MIL-STD-461 and MIL-STD-462.

3.4.9.1 Heating elements. Each jug shall be equipped with standard 130-watt, maximum, output heating elements for use with 28-volt (within limits of 25 to 29 volts) direct current and also for use with a 115-volt (within limits of 102 to 124 volts) alternating-current power supply.

3.4.9.2 Plug and receptacle. The plug shall conform to part number 16706-1 manufactured by the Cannon Electric Co., Los Angeles, California, or equal. The plug shall mate with receptacle part number 16707 manufactured by the Cannon Electric Co., or equal.

3.5 Performance. Each jug shall meet the following performance criteria.

3.5.1 Temperature control and operation. The thermostat and heater shall maintain the water temperature within the range of 170 to 190 degrees Fahrenheit when tested in accordance with 4.5.1.

3.5.2 Heat retention. With the jug filled with water preheated to a temperature of not more than 200 degrees Fahrenheit, the temperature of the contents shall not decrease more than 65 degrees when tested in accordance with 4.5.2.

3.5.3 Thermal shock. The jug shall show no signs of damage when subjected to thermal shock and tested in accordance with 4.5.3.

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:09Z
Check the source to verify that this is the currentversion before use.

3.5.4 Overload. The jug shall function satisfactorily after 32 volts are applied to the 28-volt terminal and 125 volts are applied to the 115-volt terminal in accordance with 4.5.4.

3.5.5 Leakage. There shall be no leakage between the inner and outer cases of the jug when tested in accordance with 4.5.5.

3.5.6 Dielectric. The jug shall withstand the application of 900-volts between the live parts and dead metal parts when tested in accordance with 4.5.6.

3.5.7 Handle and cover. There shall be no distortion, bending, cracking, or fastener failure of the handle or the cover when the jug is loaded and tested in accordance with 4.5.7.

3.5.8 Drainage. The jug shall drain all but a maximum of six fluid ounces of liquid when tested in accordance with 4.5.8.

3.6 Identification. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130. Identification shall include the following information:

Nomenclature
Manufacturer's Name
Manufacturer's Model Designation
Manufacturer's Serial Number
Contract or Order Number
Federal Stock Number
Date of Manufacture
US

3.7 Workmanship. The container shall be uniform in quality and all components shall be assembled in a neat workmanlike manner. Parts shall be free from fractures, splits, punctures, dents, deterioration and shall not be bowed or malformed. Each unit shall be free of corrosion and all welds shall be smooth and complete.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:09Z
Check the source to verify that this is the currentversion before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1)
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. When first article approval is required under 3.1, first article inspection shall be performed. Unless otherwise specified (see 6.2), first article inspection shall comprise the examinations in 4.4.1 and 4.4.2 and all tests in 4.5. Failure of the item to pass any examination or test shall be cause for disapproval of the first article.

4.2.2 Quality conformance inspection. Quality conformance inspection shall be performed on sample units selected in accordance with 4.3. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the examination in 4.4.2 and the tests in 4.5.1, 4.5.4, 4.5.5, and 4.5.6. The acceptable quality level shall be as specified in 4.3.1 for the examinations and 4.3.2 for the tests.

4.3 Sampling. Sampling lots for examinations and tests shall be selected in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein. For sampling purposes, a lot shall consist of all insulated jugs offered for delivery to the Government at one time under a specific contract. A sample unit shall consist of one completely fabricated insulated jug.

4.3.1 Sampling for examinations. A random sample of insulated jugs shall be selected from each lot in accordance with inspection level II of MIL-STD-105. The sampling level and acceptable quality level shall be as specified for each examination.

4.3.2 Sampling for tests. A random sample of insulated jugs shall be selected from each lot in accordance with inspection level S-3 of MIL-STD-105. The acceptable quality level shall be 4.0 defects per 100 units.

4.4 Examinations.

4.4.1 Component and material examination. In accordance with 4.1, components and materials shall be examined and tested in accordance with all the requirements specified in reference specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 End product examination. The end product examination shall consist of a visual examination (see 4.4.2.1) and a weight and dimension examination (see 4.4.2.2).

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:09Z
Check the source to verify that this is the current version before use.

4.4.2.1 Visual examination. Defects found during the examination of the end item shall be classified in accordance with Table I. The sampling level shall be II of MIL-STD-105 and the acceptable quality level shall be 2.5 defects per 100 units for major defects and 4.0 defects per 100 units for total defects.

4.4.2.2 Weight and dimension examination. The jug shall be examined for compliance with the specified weight and dimensions. Any deviation from specifications shall constitute a defect. The sampling level shall be S-3 of MIL-STD-105 and the acceptable quality level shall be 4.0 defects per 100 units for total defects.

TABLE I

CLASSIFICATION OF DEFECTS

EXAMINE	DEFECT	CLASSIFICATION Major	Minor
Finish	Outer shell and cover not electro-polished or not a standard polish No. 4 or No. 6 finish		X
	Inner shell not electro-polish finish	X	
	Interior surface has roughness over 1-square inch		X
	Deep scratch or tool marks, clearly noticeable	X	
	Pitted, stained, or discolored	X	
Construction and Workmanship	Design Characteristics not as specified	X	
	Top of Jug not provided with a removable cover or lid	X	
	Removable cover or lid not equipped with carrying handle	X	
	Any part malformed, dented, buckled, or bent, affecting serviceability	X	
	Any part not connected or joined as specified	X	
	Any sharp burrs, slivers, or edges that could cause injury to user	X	

Source: https://assist.dla.mil -- Downloaded: 202640-20T07:09Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	Major	Minor
	Top of jug not sloped from inner periphery to outer periphery or provided with a cover and gasket large enough to cover the entire top of the container body	X	
	Not equipped with thermostatically controlled electrical heating element	X	
	Joints not smooth or made by proper welding as specified	X	
	Outer container not reinforced by stiffening ribs or by other suitable means to prevent buckling	X	
	Spigot tube not connected as specified		X
Cover	Not provided with a quick connect or disconnect latch or clamps	X	
	Latch or clamp not type approved by procuring activity		X
	Not provided with indentation to accommodate the handle when not in the carrying position		X
Handle	Handle grip not as specified or not attached to cover	X	
Washer, gasket, and seal	Missing, not colorless, or sticky	X	
Spigot	Missing	X	
	Not type specified or not attached as specified		X
	Not easily assembled or disassembled for cleaning		X
Welding (as applicable)	Missing, incomplete, cracked, fractured, or not fused	X	
	Not smooth, uniform, or scale and flux not removed		X

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:09Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	Major	Minor
Electrical assembly	Wiring cut, abraded, not joined, loose at connection, or not inclosed as specified	X	
	Adequate slack not provided for wiring to relieve strain or excessive insulation stripped from wiring		X
Assembly	Component not properly secured or assembled as specified	X	
Identification marking	Equipment, assemblies, and parts not marked as specified		X
	Omitted, illegible, incorrect, or not attached as specified		X

4.4.3 Examination of preparation for delivery. An examination shall be made to determine that preservation, packaging, packing and marking as required by section 5 are complied with. Defects shall be noted as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for examination at one time. The inspection level shall be S-2 with an acceptable quality level of 4.0 expressed in terms of defects per 100 units.

TABLE II
EXAMINATION OF PREPARATION FOR DELIVERY

EXAMINE	DEFECT
Marking, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Workmanship	Blocking and bracing inadequate, improper, or missing
Materials	Component missing, damaged, or otherwise defective
Preservation	Preservation improperly applied or missing

4.5 Testing. Unless otherwise specified (see 6.2), all tests required by this specification shall be made at an atmospheric pressure of approximately 29.92 inches of mercury and at a temperature of approximately 25 degrees Centigrade (77 degrees Fahrenheit). Where tests are made with atmospheric pressure or temperature substantially different from these values, proper allowance shall be made for the change in instrument readings. Sampling for all tests shall be as specified in 4.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:09Z
Check the source to verify that this is the current version before use.

4.5.1 Temperature control and operation test (see 3.5.1). The jug shall be filled with at least 2 quarts of water preheated to a temperature within the range of 170 to 190 degrees Fahrenheit. The jug shall be connected to a 28-volt, direct-current power source and the thermostat set at 180 degrees. At no time during a 12-hour period shall the water temperature mid-distant from the bottom of the jug to the water level fall outside the range of 170 to 190 degrees Fahrenheit. Temperatures should be taken at maximum intervals of 1 hour. The test shall be repeated using a 115-volt, alternating-current power source.

4.5.2 Heat retention test (see 3.5.2). With no current applied, the jug shall be preheated with water at a temperature of 203 to 207 degrees Fahrenheit for 5 minutes. The jug shall be drained and refilled with water at a temperature of 200 degrees Fahrenheit, and the top of the jug shall be put in place. At the end of 6 hours the temperature of the water shall not have decreased more than 65 degrees Fahrenheit. Jugs not maintaining the specified temperature shall be rejected.

4.5.3 Thermal shock test (see 3.5.3). The jug shall show no signs of damage when subjected to the following:

a. Expose the empty jug to an ambient temperature of minus 65 degrees Fahrenheit for a minimum period of 24 hours.

b. Immediately place the jug in an ambient temperature of plus 160 degrees Fahrenheit; apply power, fill with water preheated to a temperature of plus 160 degrees Fahrenheit, and operate for 24 hours.

c. Decrease the ambient temperature to plus 80 degrees Fahrenheit, and operate for 24 hours.

d. Decrease the ambient temperature to plus 10 degrees Fahrenheit, and operate for a period of 24 hours.

4.5.4 Overload test (see 3.5.4). The 28-volt element shall be connected to a 32-volt, direct-current power source and the 115-volt element to a 125-volt, alternating-current power source for a period of 30 minutes respectively. Any evidence of failure of either circuit shall be cause for rejection of the jug.

4.5.5 Leakage test (see 3.5.5). The completely assembled jug shall be submerged in water for 5 minutes. Four pounds per square inch of air pressure shall be applied between the inner and outer cases of the jug while it is submerged. Bubbles from any part of the jug indicating leakage shall be cause for rejection.

4.5.6 Dielectric test (see 3.5.6). The dielectric test shall be performed with a suitable transformer, the output of which can be regulated. One terminal shall be connected to the jug case and the other shall be connected to a

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:09Z
Check the source to verify that this is the current version before use.

jumper which connects all terminals of the plug. The potential shall be increased until a 900-volt, 60 cycle test voltage has been reached and maintained for 1 minute. Any breakdown of insulation shall be cause for rejection.

4.5.7 Handle and cover test (see 3.5.7). The jug shall be loaded with at least 60 pounds of dead weight, and the cover fastened in place. The loaded jug shall be lifted by the handle for 2 minutes using a force that is equally distributed on the hand grip. Any distortion, bending, cracking, or fastener failure of the handle and cover shall be cause for rejection.

4.5.8 Drainage test (see 3.5.8). The jug, sitting level and with the spigot attached, shall drain, without being tilted, all but a maximum of 6 fluid ounces of liquid.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Each jug shall be packaged Method 1C-2, MIL-P-116. Each jug Method 1C-2 packaged shall be further overpacked into a snug fitting fiberboard box conforming to Style RSC, Grade W6C, PPP-B-636. Blocking and bracing of each jug within the container provided by Method 1C-2 shall be in accordance with MIL-STD-1186 and shall eliminate movement of the item and provide clearance for projecting parts from inner walls of the box, and prevent damage to the items from shock or vibration while in transit and during handling.

5.1.2 Level C. Each jug shall be packaged in compliance with Level C requirements of MIL-STD-794.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A and B. Jugs unit packaged in accordance with paragraph 5.1.1 require no further shipping container except when the total number of such containers in any individual shipment exceeds twenty-five (25) each. Such shipments shall be consolidated, using Flat pallets or box pallets meeting the requirements of MIL-STD-147 or exterior shipping containers meeting the requirements of MIL-STD-794.

5.2.2 Level C. Each shipment shall be packed in compliance with Level C requirements of MIL-STD-794.

5.3 Markings. In addition to any special markings required by the contract or order, unit packages and shipping containers or pallets shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. This insulated jug is intended to be used aboard long range aircraft for storing 2 gallons of hot or cold beverages.

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:09Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. First article, if not required (see 3.1)

c. Dry-ice well, if required (see 3.4.6)

d. First article inspection, if different (see 4.2.1)

e. Quality conformance inspection, if different (see 4.2.2)

f. Levels of preservation, packaging and packing (see 5.1 and 5.2).

Custodian:

Air Force - 84

Preparing Activity:

Air Force - 84

Project Number:

7330-F347

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:09Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

WRAMA (WRNEMI)
ROBINS AFB GA 31093

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:09Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

[ ] YES [ ] NO IF "YES" IN WHAT WAY?

4. REMARKS (*Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity*)

SUBMITTED BY (*Printed or typed name and activity*)	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE. AFLC WAFB,GA JUN 67 - 500

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:09Z
Check the source to verify that this is the current version before use.