MIL-F-2692F
31 March 1983
Superseding
MIL-F-2692E
31 December 1975

MILITARY SPECIFICATION

FLAGS AND PENNANTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.--This specification covers the general requirements for flags and pennants, other than the US National flags, used by the Department of Defense. The detailed requirements for a given flag will be covered by the drawing for that specific flag.

1.2 Classification.--Flags and pennants shall be of the following materials and styles as specified (see 6.2):

MATERIALS
- Cotton Bunting
- Nylon, Lightweight Bunting
- Nylon, Heavyweight Bunting
- Nylon-Wool Bunting
- Acrylic Bunting
- Rayon Banner Cloth
- Nylon Cloth, Fluorescent

STYLES (Design application)
- Appliqued
- Hand Embroidered
- Machine Embroidered
- Screen Printed (not applicable to acrylic flags)
- Combination of above, as specified

1.2.1 Headings.--The heading for the flags and pennants shall be of the following types and classes as specified (see 6.2 and 6.5):

Type I--Duck
- Class 1--With distance line (except for acrylic flags)
- Class 1A--With distance line (for acrylic flags)
- Class 2--With grommets
- Class 3--With distance line and thimbles
- Class 4--With grommets and leather tabs

Type II--Tube and tunnel type (with cotton sheeting lining and leather tab)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA 22314, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Type III--Hemmed
Class 1--With tapes
Class 2--With leather tabs

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS
FEDERAL
V-T-276--Thread, Cotton
V-T-285--Thread, Polyester
V-T-295--Thread, Nylon
V-T-301--Thread, Silk
KK-L-2004--Leather Cattlehide, Deerskin and Horsehide, Chrome Tanned
UU-P-268--Paper, Kraft, Wrapping
UU-P-553--Paper, Wrapping; Tissue
CCC-C-419--Cloth, Duck, Cotton, Unbleached, Plied - Yarns, Army and Numbered
CCC-C-430--Cloth, Sheeting, Cotton and Polyester, and Cotton
CCC-C-439--Cloth, Bunting, Cotton, Mercerized
CCC-C-447--Cloth, Percale, Cotton
CCC-C-476--Cloth, Bunting, Nylon and Nylon and Wool
DDD-L-20--Label, For Clothing, Equipage, and Tentage (General Use)
PPP-B-566--Box, Folding, Paperboard
PPP-B-636--Box, Shipping, Fiberboard
PPP-B-676--Boxes, Setup

MILITARY
MIL-H-226--Halyard, Signal, Braided, Treated
MIL-C-606--Cloth, Banner, Rayon
MIL-T-713--Twine, Fibrous Impregnated, Lacing and Tying
MIL-T-2283--Tape, Textile, Nylon, Woven, White or Dyed
MIL-F-2310--Fringe, Ornamental, Rayon
MIL-C-3636--Cord and Tassel, Flag
MIL-H-15021--Hook, Snap Bolt, Swivel Eye and Rings
MIL-G-16491--Grommet, Metallic
MIL-R-17343--Rope, Nylon
MIL-C-22775--Cloth, Bunting, Acrylic
MIL-L-40051--Leather, Cattlehide, For Glove Leather
MIL-T-43566--Tape, Textile, Cotton, General Purpose, Natural or in Colors

STANDARDS
FEDERAL
FED-STD-191--Textile Test Methods
FED-STD-356--Commercial Packaging of Supplies and Equipment
FED-STD-751--Stitches, Seams and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

MILITARY
MIL-STD-105--Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129--Marking for Shipment and Storage

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.--The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issue in effect on date of invitation for bids or request for proposal shall apply:

THE COLOR ASSOCIATION OF THE UNITED STATES, INCORPORATED
The Standard Color Reference of America, Tenth Edition
United States Army Color Card The Official Colors for Branches, Agencies, etc.
DOD, Standard Color Card of Official Standardized Shades for Sewing Threads 1968.
DOD, Standard Shades for Heraldic Yarns for Embroidery and Ribbons, 1974.

(Applications for copies of the color cards should be addressed to The Color Association of the United States, Inc., 24 East 38th Street, New York, New York 10016.)

3. REQUIREMENTS

3.1 Standard samples.--Unless otherwise specified (see 6.2), the contracting officer shall furnish standard samples of the cloth and the thread for matching fastness to light and bleaching only.

3.2 First Article.--When specified (see 6.2), before production is commenced, a sample of the completely finished flag or pennant, as applicable, shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests specified in 4.2. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of compliance with all applicable provisions of this specification. The first article shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.3 Materials.--Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Basic flag materials.--

3.3.1.1 Cotton bunting.--The cotton bunting shall conform to CCC-C-439.

3.3.1.2 Lightweight nylon bunting.--Lightweight nylon bunting shall conform to type I, class A of CCC-C-476. At the option of the manufacturer, heavyweight nylon bunting conforming to material cited in 3.3.1.3 may be substituted for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

lightweight nylon bunting. All other requirements applicable to flags made of lightweight nylon bunting shall still apply.

3.3.1.3 Heavyweight nylon bunting.--Heavyweight nylon bunting shall conform to type I, class B of CCC-C-476, except that paragraph 3.6.1 shall be deleted and the following substituted: The finish of the nylon bunting shall be equal to, or better than, the standard sample.

3-3.1.4 Nylon-wool bunting.--Nylon-wool bunting shall conform to type II of CCC-C-476.

3.3.1.5 Rayon.--The rayon banner cloth shall conform to MIL-C-606.

3.3.1.6 Fluorescent nylon cloth.--The fluorescent nylon cloth shall be 200 denier nylon in both warp and filling, 3.0 $\pm$ 1/2 ounce per square yard, plain weave and heat treated.

3.3.1.7 Cotton percale.--Cotton percale shall conform to CCC-C-447.

3.3.1.8 Acrylic bunting.--Acrylic bunting shall conform to MIL-C-22775.

3.3.2 Duck.--The duck used for the heading shall be white or in the gray, shall weigh not less than 8.25 ounce per square yard, have 2 ply yarn in both warp and filling, and shall have a breaking strength of not less than 105 pounds in the warp and 100 pounds in the filling direction when tested as specified for type III, 8.25 ounce duck in CCC-C-419.

3.3.3 Sheeting.--

3.3.3.1 Tube heading lining.--Unless otherwise specified, the cotton sheeting used for lining the tube heading shall conform to type I or II, class 1, style A or B of CCC-C-430.

3.3.3.2 Sheeting for insignia, stars or other symbols.--

3.3.3.2.1 Cotton and mixed nylon-wool flags.--Unless otherwise specified, insignia, stars or other symbols for cotton or mixed nylon-wool flags shall be made from cotton sheeting conforming to type II, class 1, style A of CCC-C-430. The insignia, stars or other symbols may be sized or stiffened to aid in sewing, provided the agent does not have a deleterious effect on appearance or serviceability.

3.3.3.2.2 Nylon flags.--Unless otherwise specified, insignia, stars or other symbols for nylon flags shall be made from lightweight nylon conforming to type I, classes A or B of CCC-C-476. The insignia, stars, and other symbols may be sized or stiffened to aid in sewing provided the agent does not have a deleterious effect on appearance or serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

3.3.3.2.3 Rayon flags and acrylic flags and pennant.--Unless otherwise specified, insignia, stars and other symbols for rayon flags and acrylic flags and pennants shall be made from the same material as the flag.

3.3.4 Thread.--

3.3.4.1 Cotton.--Cotton thread shall coform to V-T-276. The types and sizes of thread shall be as specified in table I.

TABLE I COTTON thread sizes.--

Flag or flag component	Type	Ticket No.	Ply	Finish
Cotton bunting flags	IA	50	3	Soft
Rayon or fluorescent nylon flags	IC	B	3	-
Distance lines	IIIA or IIIB	-	16/4	Soft or glazed
Cotton duck headings	IA or IB	-	10/3	Soft or glazed
Applique of cotton design components nylon-wool flag	IA	50	3	Soft

3.3.4.2 Nylon.--Nylon thread shall conform to V-T-295. The thread for sewing nylon-wool flag and the hems, and reinforcement patches of the nylon flags shall be machine twist or twisted bonded multicord, conforming to type I or II, class 1, size B, 2 or 3 ply nylon thread. The thread used for sewing nylon flags, except for the hem and reinforcement patches, shall be type I or II, size A or B, 3 ply nylon thread.

3.3.4.3 Silk.--

3.3.4.3.1 Hand embroidery.--The silk thread for hand embroidery shall conform to type IV of V-T-301 with the following exceptions to the requirements:

Commercial designation	Minimum average length per ounce (yard)	Minimum average breaking strength (pound)
A	1000	3.0
FF	233	11.0

As an alternate a ss mercerized and gassed cotton yarn may be used in lieu of the silk thread and may be substituted as follows:

Silk Thread	Cotton Size
A Type	20/2
FF Type	10/2

See paragraph 3.3.4.3.2 for colorfastness requirements for above cotton yarn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

3.3.4.3.2 Colorfastness for embrodery cotton yarn.--As an alternate 20/2 ss mercerized and gassed cotton yarn may be used in lieu of the silk thread and shall show good colorfastness to wet-dry cleaning, water, light, and crocking.

3.3.4.4 Rayon.--Rayon thread used in Bonnaz machine embroidery shall be 600 denier, continuous filament, regenerated cellulose (viscose or cupramonium) rayon thread. The thread shall have not less than 460 yards per ounce and a breaking strength of not less than 2.3 pounds.

3.3.4.5 Polyester.--Polyester thread for sewing acrylic flags and pennants shall conform to type I, class A, letter size B, 3 ply of V-T-285 and shall be white in color.

3.3.4.6 Color and colorfastness.--Unless otherwise specified, the color of the thread shall match the color of the material on which it is used. Except for reinforcement patches, multicolored flags and pennants made of cloth other than acrylic bunting may be sewn with white thread or thread of the predominant color. Acrylic flags and pennants shall be sewn with white thread. The thread for duck headings shall be white or unbleached. When a fringe is specified, the color of the thread visible on the face of the fringe shall match the color of the fringe. Fringe attachment threads for multicolored flags, visible on the reverse side of the flag shall match the predominant color of the base material. The colorfastness requirements of the thread used shall be equal to or better than the material on which it is used, as described in 3.4.1.1.1.

3.3.5 Distance Lines.--The distance lines shall be 1/4 inch in diameter nylon rope conforming to MIL-R-17343 or 1/4 inch in diameter twisted or solid braided polypropolene rope having a minimum breaking strength of 1000 pounds as shown on the applicable drawing.

3.3.5.1 Twine.--The twine used in wrapping the free end of the distance line shall be waxed twine conforming to type N, class 3 of MIL-T-713.

3.3.6 Tape.--Tape shall be 1/2 inch nylon tape conforming to MIL-T-2283.

3.3.7 Snap hook and ring.--The snap hooks and rings shall conform to MIL-H-15021. Unless otherwise specified on the applicable drawing, the snap hook may conform to either type I or II.

3.3.8 Grommets.--Grommets shall conform to type II or III, class 1 of MIL-G-16491.

3.3.9 Leather.--Leather for the tabs shall conform to type I, class 2 of KK-L-2004, 3 to 4 ounces when measured on a Woburn Gauge or type II of MIL-L-40051. When natural colored leather is used, the crocking requirements shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

3.3.10 Fringe.--Except for automobile flags and unless otherwise specified, the fringe shall conform to class 2 of MIL-F-2310. The fringe for automobile flags, when specified, shall conform to class 1 of MIL-F-2310. The color of the fringe shall be as specified on the applicable drawing.

3.3.11 Webbing.--When specified, the webbing used for reinforcement of type I, class 3 headings shall conform to type I, class 1 or 2 of MIL-T-43566, and shall be of the width specified on the applicable drawing.

3.3.12 Cord and tassels.--When specified (see 6.2), cord and tassels shall conform to MIL-C-3636 and the applicable drawing.

3.3.13 Thimbles.--Thimbles shall be galvanized steel and of the type used for 1/4 inch in diameter wire rope. They shall be semi-circular at the closed end and tapering at free ends.

3.4 Design.--The design and size of the flags and pennants shall be as specified on the applicable drawing. Unless otherwise specified on the drawing, a tolerance of plus or minus 5 percent shall be allowed for all dimensions exceeding 2 inches except that maximum and minimum measurement of dimensions on a single flag may not differ more than 2 percent of the required dimensions and both be within 5 percent tolerance. For dimensions 2 inches or under, a tolerance of plus or minus 1/8 inch will be allowed.

3.4.1 Components of design.--Components of the design shall be applied by one or a combination of methods specified herein and as specified on the applicable drawing. The methods of application are appliqueing, hand embroidery, machine embroidery and screen printing. Screen printing does not apply to acrylic flags. Components of the design shall be clearly distinguishable and identically oriented on each side with respect to the heading or staff end of the flag. The components, except for lettering, should therefore appear reversed on the reverse side, as if printed through from the face side. Unless otherwise specified on the drawing, lettering shall read from left-to-right on both sides of the flag. The face side of the flag shall be designated as the side visible when the heading is on the viewers left. Unless otherwise specified and except for acrylic flags or where components of design are printed on percale, when appliqueing is used as the method of design application, the thread used for appliqueing shall match the color of the design component. Unless otherwise specified components of design printed on percale shall be appliqued with thread matching the basic color of the percale. Components of design for acrylic flags and pennants shall be appliqued with white polyester thread specified in 3.3.4.5.

3.4.1.1 Color.--The colors shall be as designated on the applicable drawing and shall conform to approved shade standard samples as furnished or designated by the contracting officer. When cable numbers are referenced in the applicable drawing and shade standards are not furnished by the procuring activity, the standards may be obtained from color cards issued by or directly from The Color Association of the United States, Incorporated (see 2.2). Screen printed designs and colors shall be as designated by the applicable drawing. The colorant

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

system for the screen printed design shall be such as to maintain the essential textile appearance of the base material upon which design is printed. The dye shall not adversely effect the hand of the fabric. Coatings are not allowed except with the express approval of the contracting officer. When prints are required to register (on face and back of a given flag or pennant), the appearance of the print, when viewed by through-lighting shall be undistorted due to displacement of the print on one side in relation to that on the other side of the fabric. When prints are applied to fabric subsequently to be appliqued to a flag or pennant by sewing, some strike-through of the print is permissible provided that it does not adversely affect the appearance of the print on the finished flag or pennant. When a penetrating dye is used, the resulting color on the face shall match the color specified on the applicable drawing. A slight change in color will be allowed on the reverse side.

3.4.1.1.1 Colorfastness.--The colorfastness of the base materials of flags and pennants, shall be in accordance with the requirements of the applicable specification for the material. When screen printed designs are specified, the design shall be obtained by the use of such colorants as will provide a degree of colorfastness equal to or better than that of the dyed basic fabric of the flag or pennant. When the brilliance of the color is such as to require the use of napthol colors, or when black areas are involved, the colorfastness to crocking may be fair. Rating on an adjective basis will be performed only when a standard sample of reference of the exact material is not provided.

3.5. Construction.--Flags and pennants shall be constructed in accordance with the applicable drawing and the requirements specified herein.

3.5.1 Basic construction.--Unless otherwise specified, all flags and pennants shall have the warp of the basic material running in the fly, or horizontal, direction of the flag. All raw edges shall be hemmed. A selvage end may be used at the top or bottom edge of the flag or pennant except that flags or pennants manufactured from all nylon, acrylic bunting, or rayon banner cloth shall be hemmed on all edges. Hems shall be turned to the back side of the flag except that hems on all fringed flags shall be turned to the front side of the flag. The ends of all stitching shall be backstitched not less than one inch when not caught in seam or other stitching. Except for flags and pennants of acrylic bunting when the size of the pennant necessitates the piecing of the basic material, the seam, whenever possible, shall be in the center two-thirds of the material being pieced. Where the size of an acrylic flag or pennant necessitates the piecing of the material, the base cloth may be used with the warp thread running in the vertical or hoist direction except that code and pennant flags with the letters Y, M, and V and the numerals 4, 5, and 6 shall have material for the strip cut on a bias and set in on the straight of the material.

3.5.2 Headings.--Unless otherwise shown on the applicable drawing, headings for the flags and pennants shall be as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

3.5.2.1 Type I.--Type I headings shall be fabricated from duck specified in 3.3.2 and the requirements specified herein.

3.5.2.1.1 Class 1.--Type I, class 1 heading shall be constructed in accordance with the details and dimensions shown on figure 1 and as specified herein. The headings shall be made by cutting a piece of duck 6 inches wide and 2 inches longer than the hoist of the flag. The edges and ends of the duck strip shall be turned-in 1 inch and the duck doubled over to form a 2 inch wide heading. The hoist end of the flag shall be turned-under 3/4 inch and may be sewn with a single row of stitching. The folded end of the flag shall then be inserted between the edges of the duck for a distance of 1 inch so that the ends of the flag shall not be exposed. With the turned-in sides and ends of the duck even, the hoist end of the flag and the open side of the heading shall be stitched with three rows of equidistant stitching 1/4 to 3/8 inch gauge (1/8 inch stitching margin). The flag or pennant shall have a distance line specified in 3.3.5, running through the heading. The line at the top of the heading shall pass through a ring specified in 3.3.7, doubled back and superimposed upon itself and sewn with zigzag stitches through both thicknesses of the line for a minimum distance of 2 inches. The line shall then be drawn into the heading until the ring is approximately flush with the outer edge of the heading. The top of the heading shall then be closed by two rows of stitches 1/4 to 1/2 inch gauge, either up to or through the halyard. The distance line shall be secured within the heading by zigzag stitches at the top, center and bottom for a minimum of 2 inches at each location. The lower end of the heading shall then be closed by two rows of stitching in the same manner as the top. The snap hook specified in 3.3.7, shall be attached to the distance line by passing the line through the swivel loop, doubled back and superimposed upon itself for a distance of not less than 2 inches and sewn by zigzag stitching for a minimum of 2 inches. Zigzag stitching at the top and bottom of the line shall pass through both thicknesses of the distance line. Prior to zigzag stitching, the free end of the distance line shall be whipped for a distance of not less than 1/2 inch with not less than 8 turns using waxed twine specified in 3.3.5.1. The overall length of the extended portion of the distance line and snap hook, measured from the lower edge of the heading shall be 9 inches for signal flags and pennants and 24 inches for all others. Distance lines for flags and pennants having an area of less than 16 square feet shall be 3/4 inch in circumference; distance lines for flags and pennants with an area of 16 square feet and larger shall be 1 inch in circumference unless otherwise specified on the applicable drawing. The stitch type shall be as specified in table II. At the option of the manufacturer, a type I, class 1A heading may be used as an alternate method of construction.

3.5.2.1.2 Class 1A.--Type I, class 1A headings shall be constructed as specified in 3.5.2.1.1 with the following exceptions:

a. The heading shall be constructed in accordance with the details and dimensions of figure 2.

b. The distance line shall be fabricated from 1/4 inch diameter nylon rope specified in 3.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

c. The width of the zigzag stitching shall cover no less than one half the diameter of each strand of rope. The ends of the zigzag stitching shall be firmly secured by backstitching or overstitching or by increasing the number of stitches per inch at the ends for a minimum of 1/4 inch.

d. The turned back end of the distance line shall be zigzag stitched from the snap hook to the free end of the distance line within the heading.

e. The free end of the nylon rope shall be whipped as specified in 3.5.2.1.1 or may be taped or fused at the ends to prevent raveling. Both cutting and fusing of the nylon rope may be accomplished in one operation if a hot wire or blade is used for the operation.

3.5.2.1.3 Class 2.--The construction and dimensions shall be as specified for type I, class 2 headings on figure 1. Stitch type shall be as specified in table II. The heading shall be made with a piece of duck 6 inches wide and 5 inches longer than the flag hoist to which it is to be attached. Both side edges shall be turned-in 1 inch and both ends turned-in 2-1/2 inches. The hoist end of the flag shall be turned under 3/4 inch and may be sewn with a single row of stitching. The folded ends of the inserted flag hoist shall not be exposed. The raw edges of the ends of the duck strip shall be closed with a single row of stitching using a 1/8 inch stitching margin or as an alternate, the rows of stitching may be placed after the duck strip is doubled over. The duck strip shall then be doubled over to form a finished heading 2 inches wide. With the sides and ends of the duck strip even, two rows of stitching (not less than 3/16 inch stitching gauge, 1/8 inch stitching margin) shall be sewn through all thicknesses. Single rows of stitching shall be placed along the centerfold edge and ends of the duck strip using a 1/8 to 1/4 inch stitching margin. The duck heading shall be finished by securely clinching two No. 2 grommets specified in 3.3.8 in positions shown on figure 1 for type I, class 2 headings.

3.5.2.1.4 Class 3 (distance line with thimble).--The construction and dimensions of the class 3 heading shall be as specified for class 1 headings except that the heading shall be fitted with a 1/4 inch galvanized steel thimble specified in 3.3.13 at each end so as to provide a loop not less than 1-1/4 inches in length. The snap hooks and rings specified for class 1 heading shall be omitted.

3.5.2.1.5 Class 4.--The construction and dimensions shall be as specified for type I, class 4 headings on figure 4. Seam type shall be as specified in table II. The heading shall be made on duck specified in 3.3.2, cut 8 inches wide and 5 inches longer than the hoist of the flag. The hoist end of the flag shall be positioned 1 inch in from the side edge of the duck, 2-1/2 inches from each end and stitched with one row of stitching. The side edge of the duck attached to the flag shall be turned-in 1 inch so that a 1 inch strip of flag material the same length as the hoist shall be folded inside the turned-in duck fold as shown on the applicable drawing for type 1, class 4 headings. The opposite side edge of the duck shall also be turned-in 1 inch. The ends of the duck strip shall be turned-in 2-1/2 inches. The raw edges of the top and bottom duck ends shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

stitched closed with a single row of stitching with a 1/8 inch stitching margin. A tab of leather specified in 3.3.9, 3/4 inch plus a minus 1/16 inch wide and not less than 2 inches long, having a slit and eyelet 3/4 inch plus or minus 1/16 inch long for fastening tab over a knob or button of the flagstaff shall be centered and placed flush with each end of the duck heading as shown on the applicable drawing. The tabs shall be secured through the two thicknesses of duck by box stitching as shown on the applicable drawing. Stitching shall be securely backstitched. Four No. 2 grommets specified in 3.3.8, shall be clinched into position as indicated on applicable drawing. The duck heading shall be doubled over to form a heading width of at least 2-3/4 inches. Position the sides and the ends of duck evenly, with the grommet holes aligned, and sew two rows of stitching not less than 1/16 inch gauge, 1/8 inch margin through all thicknesses.

3.5.2.2 Type II.--The heading shall be of the tube or tunnel type for insertion of a flagstaff, and shall be made with cotton sheeting specified in 3.3.3.1. The construction and dimensions shall be as specified for type II headings on figure 5. Stitch type shall be as specified in table II. The sheeting shall be 6 inches wide and 5 inches longer than the hoist of the flag except for the guidons, for which the sheeting shall be cut down proportionately in the width so that a 2-1/4 inch heading is formed. Each end shall be folded under 2-1/2 inches. The sheeting shall be fitted with a tab of leather specified in 3.3.9, at each end. Each tab shall be 3/4 inch plus or minus 1/16 inch wide, and not less than 2 inches long. Each tab shall have a slit and eyelet 3/4 inch plus or minus 1/16 long for fastening over a knob or a button on the flagstaff. The slit and eyelet shall be centered on the width of the tab shown on the applicable drawing. The tab shall be placed within the heading and centered opposite the stitching of the hem. The tab shall be secured through the two thicknesses of lining by box stitching as shown on the applicable drawing. As an alternate, the leather tabs may be secured by stitching through both lining and heading material. Stitching shall be securely backstitched. The contractor's label specified in 3.8 shall be affixed at the same time the tabs are placed on the sheeting. The sheeting strip shall be placed on the back of the flag at the hoist end with the folded ends of the strip flush with the hemmed or selvage edges of the flag at the top and attached thereto by a single row of stitching across each folded end of the strip. The raw edge side of the stitching shall be placed 1/2 inch from the raw edge of the flag. The tube or tunnel shall then be formed by hemming the hoist end of the flag with the sheeting strip inside. Sheeting may also be seamed separately with a 1/2 inch seam to form a tunnel. Turn under hoist edge of flag 1/2 inch and insert under folded side edge of sheeting strip. Turn under and stitch with a single or double row of stitching (3/16 inch margin), which shall pass through both the turned edge of the flag and both edges of the unseamed or seamed lining strip. The flat width of the finished hem shall be not less than 2-3/4 inches except for guidons which shall not be less than 2-1/4 inches.

3.5.2.3 Type III.--Flags without duck or cotton sheeting headings shall have the hoist end of the flag hemmed and shall be constructed in accordance with one of the following subparagraphs as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

3.5.2.3.1 Class I.--The construction and dimensions shall be as specified for type III, class I headings on figure 6. Stitch type shall be as specified in two rows of stitching. Nylon tape specified in 3.3.6, shall be cut 12 inches long, doubled end-to-end so as to form tie-tapes and attached to the hem with two rows of stitching. One tape shall be attached 1 inch from the top of the hem and the other 1 inch from the bottom. The tapes shall overlap the full width of the hem and be arranged so as to facilitate the typing of the flag to a flagstaff.

3.5.2.3.2 Class 2.--The automobile flags (and other flags when required) shall have the hoist end hemmed after insertion of leather tabs specified for type III, class 2 headings on figure 6. Two rectangular leather tabs 1-3/8 inch long and 5/8 inch wide shall be located and secured within the hem as shown on figure 6.

3.5.3 Stitching of fringe.--When fringe is specified for flags, a continuous length of the fringe conforming to 3.3.10, shall be stitched to the front side of the flag at the top, fly and bottom edges of the flag and completely around each end of the heading. The fringe shall be neatly turned under and caught in the heading stitching. Selvage edges at top and bottom shall be hemmed with type EFa-1 stitching, cut edges with EFb-1 stitching. The stitching used to attach the fringe may be incorporated in the formation of the hem. As an alternate, edges may be hemmed with an EFa-1 stitching and turned over prior to attachment of fringe. The fringe shall be superimposed on the hem and evenly attached around the flag with a single row of stitching through the center of the fringe using seam type LSa-1, except that automobile flags will have fringe attached with three rows of stitching, seam type LSa-1.

3.6 Stitches, seams and stitching.--Unless otherwise specified, stitches, seams, and stitching shall conform to FED-STD-751 and as shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

TABLE II Stitches, seams and stitching.—

Section of flag or pennant	Type of seam or stitching	Minimum hem width (Inches)	Stitch type	Stitches per inch
Hem:				
Top and bottom:				
Flags with fringe.....	EFa-1 or EFb-1	3/32 - 3/16	301	12
Flags, nylon.....	EFa-1 or EFb-1	3/16	301	12
All other flags 1/.....	EFb-1 or EFb-2	3/8	301	12
Tail or fly end:				
Flags with fringe.....	EFb-1	3/32 - 3/16	301	12
Semaphore, wigwag and flags with type II headings.....	EFb-2	1/2	301	12
All other flags.....	EFb-3 or EFb-4	3/4	301	12
Reinforcement patches....	LSd-1 or LSd-2	- -	301	12
Seams:				
Cross and fly.....	LSc-2	- -	301	12
Bias.....	LSr-2 or LSc-2	- -	301	12
Appliqued design:				
Cotton 3/.....	- -	- -	304	24
Nylon, Nylon-Wool, Acrylic 4/.....	- -	- -	304	28 to 32
Rayon 2/.....	- -	- -	304	58
Headings:				
Type I (Duck):		(Heading width)		
Class 1.....	3.5.2.1.1	2	301	6
Class 1A.....	3.5.2.1.2	2	301	6
Class 2.....	3.5.2.1.3	2	301	6
Class 3.....	3.5.2.1.4	2	301	6
Class 4.....	3.5.2.1.5	2-3/4	301	6
Type II (Tunnel type) for all flags except guidons.....	3.5.2.2	2-3/4	301	12
Guidons.....	3.5.2.2	2-1/4	301	12
Type III (hemmed):				
Class 1.....	3.5.2.3.1	1/2	301	12
Class 2.....	3.5.2.3.2	1-1/4 ± 1/4	301	12
Distance lines	- -	- -	304, 308 or hand stitched	6
Fringe.....	LSa-1	- -	301	12

1/ Seam types of the same letter designation (e.g., EFb, LSd) are the same seams and differ only in the number of rows of stitching as designated by the number following the dash (e.g., EFb-1, EFb-2 or LSd-1, LSd-2).

2/ Throw of stitch 1/16 inch (unless otherwise specified on drawing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

3/ Throw of stitch 1/8 inch (unless otherwise specified on drawing). A 1/16 inch throw is permitted if stitching area is restricted in size.

4/ Throw a stitch 1/6 to 1/8 inch (unless otherwise specified on drawing).

3.7 Reinforcement patches.--Reinforcement patches are not required on flags with type II and III headings, on flags with a hoist of 24 inches or less; on pennants made from acrylic bunting; and except for sizes 3-1/2, 4 and 6, on signal flags made from acrylic bunting. When required, all patches shall be located on the reverse side of the flag or pennant and shall be fabricated of the same material in the same color as that of the section to be reinforced. All exposed edges shall be turned under a minimum of 1/4 inch and securely stitched.

3.7.1 Cotton and nylon-wool bunting flags.--Reinforcement patches on cotton and nylon-wool bunting flags with type I headings shall be sewn to each corner at the hoist end of the flag and shall extend within the heading the same distance as the flag base. The size of the reinforcement patches shall be as shown on the applicable drawing or at the option of the manufacturer; the patches may be 4 inches square for flags with hoist lengths of 2 to 3 feet or 6 inches square for flags with hoist over 3 feet. The size of the patch shall be as near the required size as possible.

3.7.2 Nylon and acrylic bunting flags.--Reinforcement patches for flags with type I heading made from nylon or acrylic bunting shall be sewn in each corner of the fly end of the flag. The patches shall be in the shape of right angle triangles with the apex (90 degree angle) located at each corner of the fly end of the flag. The size of the reinforcement patches shall be as shown on figure 8. Sewing of the patches to the fly end of the flag shall be accomplished by folding the top or bottom edge (as applicable) of the flag base 3/8 inch over the patch and then refolding both plies of fabric over 3/8 inch (see figure 7) and stitching 1/16 inch from the inner and outer edges of the fold to form the top and bottom hems. The fly end hem shall be formed by folding the edge of the base material 3/4 inch over the patch and then refolding both plies of fabric over 3/4 inch (see figure 7) and stitching the hem with three evenly spaces rows of stitches. The outer rows of stitching shall be not more than 1/16 inch from the outer edges of the hem.

3.8 Marking.--All flags and pennants having type I headings shall be marked on the heading in accordance with type IV, class 9 of DDD-L-20, with letters appropriate to the size of the heading but not more than 3/4 inch high. The lettering shall run along the length of the heading, beginning immediately below the upper grommet on class 2 headings, and in a corresponding position on all other type I headings. Marking shall contain information required for class 5 labels and shall be equal to class 8 labels in fastness of printing. For type II heading, the contractor shall affix adjacent to top leather strap a label conforming to type I, class 5 of DDD-L-20.

3.9 Workmanship.--Flags and pennants shall be clean, well-made, and shall meet the acceptable quality levels established by this specification. All stitching

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

which is not caught up by a seam or other stitching shall be backstitched a minimum of one inch. Thread tension shall be maintained throughout and all thread ends shall be trimmed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility.--Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article.--When a first article is required, examination shall be made on a completely fabricated flag for all provisions of this specification applicable to end product examination and tests.

4.3 Sampling for inspection and acceptance.--Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Inspection of component.--

4.3.1.1 Testing of component.--In addition to the quality assurance provisions of the subsidiary specifications and standards, inspection shall be performed on components and materials listed in table III. The inspection level shall be S-1 and the acceptable quality level (AQL) shall be 6.5 defects per hundred units. The sample unit for the inspection shall be one cone or spool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

TABLE III Component testing.—

Component and lot expressed in terms of	Characteristic	Rqm't ref	Test method 1/	Rqm't individual unit	appl to Lot average	#determ per sample unit	Results reported as
Silk embroidery thread (1 cone or spool)	Breaking strength	3.3.4.3.1	4102	-	X	-	-
	Length weight	3.3.4.3.1	4010	-	X	-	-
Cotton yarn	Colorfastness to: Wet-dry cleaning	3.3.4.3.2	5622	-	-	-	-
	Water	3.3.4.3.2	5630	-	-	-	-
	Light	3.3.4.3.2	5660	-	-	-	-
	Crocking	3.3.4.3.2	5651	-	-	-	-
Bonnaz machine embroidery thread (1 cone or spool)	Ply	3.3.4.4	Visual	X	-	1	pass or fail
	Breaking strength	3.3.4.4	4102	-	X	-	-
	Length-weight	3.3.4.4	4010	-	X	-	-
	Material identification	3.3.4.4	Std comm'l	X	-	1	pass or fail

1/ Test will be in accordance with FED-STD-191.

4.3.1.2 In-process inspection.—Inspection shall be performed at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated non-conformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specification requirements.

Requirement, operation or assembly	Requirement paragraph
Heading construction	3.5.2 thru 3.5.2.3.2, as applicable
Machine thread shall be checked at the machine	3.3.4 thru 3.3.4.6,

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

to determine that threads, as specified, are used.	as applicable
Turn-in and turn-under of seams, hems, reinforcement patches and headings	3.5.2, thru 3.5.2.3.2 and 3.7 thru 3.7.2, as applicable

4.3.2 Intermediate inspection.--

4.3.2.1 Testing of the intermediate product.--Testing of the partially fabricated flag or pennant shall be performed in accordance with table IV for the characteristics shown therein. The sample unit shall be one screen printed design for appliqued flags or one screen printed flag base as applicable, prior to sewing into the completed flag. The inspection level shall be S-1 and the acceptable quality level (AQL) for each characteristic shall be 6.5 defects per hundred units. All requirements shall be applicable to the sample unit.

TABLE IV Testing of intermediate product.--

Screen printed designs for:	Colorfastness to	Rqm't para	Test method 3/
Cotton, nylon and nylon-wool flags	Light	3.4.1.1.1	5660
	Crocking	3.4.1.1.1	5651
	Water	3.4.1.1.1	5630
Rayon	Light	3.4.1.1.1	5660 1/
	Crocking	3.4.1.1.1	5651
	Water	3.4.1.1.1	5630 2/
	Wet-dry cleaning	3.4.1.1.1	5622

1/ In the event of a dispute resulting from test method 5560, or as a result of suspected anomalous behavior of certain dye types or formulations, the contracting officer may authorize the exposure to natural light in accordance with method 5662.

2/ Method 5630 shall be used except the test temperature shall be 23.9 degrees to 29.4 degrees C. (75 degrees to 85 degrees F).

3/ Test method in accordance with FED-STD-191.

4.3.3 Inspection of the end item.--

4.3.3.1 Visual examination of flags and pennant.--The defects found during examination shall be classified in accordance with 4.3.3.1.1 and 4.3.3.1.2. The lots shall be inspected in accordance with 4.3.3.1.1 or 4.3.3.1.3.1 when applicable. The unit of product for these examinations shall be one flag or pennant, as applicable.

4.3.3.1.1 Examination of flags or pennants for defects in material, design, construction, workmanship and marking.--

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Examination shall be made at a distance of 18 to 40 inches with good lumination except for functional defects which, by their nature, require closer examination. Defects designated by an asterisk (*) shall be classified as major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance, but not seriously.

Examine	Defect	Classification Major	*	Minor
Quality of cloth:				
Type	Any component not fabricated of specified material	-	*	-
Color	Basic color other than specified	x	-	-
	Off shade	-	*	-
Material	Hole, cut, tear, smash or weak place	-	*	-
	Spot, stains, streaks or shade bars (considering the use position)	-	*	-
	Two or more contiguous broken, missing ends or picks in cotton, acrylic, nylon and nylon-wool cloth	x	-	-
	Two or more contiguous broken or missing ends or picks in rayon cloth	x	-	-
	Double pick, course pick or mispick clearly noticeable	-	*	-
	Slub, slough-off, float or skips	-	*	-
Quality of distance line:				
Type	Not fabricated or specified material	-	-	x
Braiding	Uneven or loose resulting in weak place	x	-	-
	Any cut, chafing, fraying or abrasion	-	*	-
Quality of metal components:				
Snap hook and ring	Not fabricated of specified material	-	-	x
	Snap hook does not work freely; binds or catches when being opened or closed	-	*	-
	Broken, cracked or malformed	-	*	-
Grommets	Broken, cracked or malformed	-	*	-
	Contains rough or sharp edges	-	-	x
Quality of leather components	Not fabricated of specified leather	-	-	x
	Hole (other than required), cut, tear or weak place	x	-	-
Quality of fringe and cord and tassels	Material, type, construction, color or color combination, not as specified	-	*	-
	Frayed edges	-	*	-
	Spotted, stained or soiled	-	*	-
	Cut or tear	-	*	-
	Wood mould not completely covered with braiding	-	-	x
	Wood mould loosely or unevenly covered	-	-	x

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	*	Minor
Screen printing	Any part of design omitted.....	-	*	-
	Coating used in lieu of dye.....	x	-	-
	Poor registration, over printing or feathering.....	-	*	-
	Wrong color, or arrangement of colors.....	x	-	-
	Dye used in screen printing adversely affects hand of fabric.....	-	*	-
	Dye bronzed or mottled to extent to affecting appearance at 6 feet.....	-	*	-
	Poor penetration of dye from front to back.....	-	*	-
Construction and workmanship general:	Operation omitted or not accomplished as specified.....	-	*	-
	Flag pieced where piecing is prohibited.....	x	-	-
	Component is not the required type, class, or size.....	-	*	-
	Wrap threads of the basic material of the flag in other than the fly direction of the flag, except as permitted in 3.5.1.....	-	*	-
Stitches, seams and stitching	Wrong type of seam, stitches or stitching.....	-	*	-
	Wrong color of thread.....	-	*	-
	Row of stitches partially or completely missing.....	-	*	-
	Wrong stitching gauge or margin.....	-	*	-
	Seams improperly formed, material caught in unrelated stitching operation.....	-	*	-
	Ends of stitching not backstitched at least 1 inch (when not caught in other seams or stitching).....	-	*	-
	Run-offs resulting in open seam.....	-	*	-
	Needle chews.....	-	*	-
	Any raw edge exceeding 1/2 inch in length.....	-	-	x
	Loose stitch tension resulting in a loosely secured seam or thread lying on surface of seam.....	x	-	-
	Tight stitch tension (stitches break when normal pull is exerted in lengthwise direction of seam or stitching).....	x	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	*	Minor
	Stitches per inch for seams, hems and reinforcement patches:			
	--four or more stitches less than specified	x	-	-
	--one to three stitches less than specified	-	-	x
	Stitches per inch for duck headings:			
	--two or more stitches less than specified	x	-	-
	--one stitch less than specified	-	-	x
	Stitches per inch for appliqueing:			
	--five or more stitches less than specified	x	-	-
	--one to four stitches less than specified	-	-	x
	NOTE: Variation in the number of stitches per inch caused by the operator speeding up the machine or pulling fabric, such as sewing over heavy places, or in turning corners shall be classified as follows: Majors to minors, minors to no defect.			
	Seam twisted, pleated or puckered	-	*	-
	More than two continuous skipped stitches	-	*	-
	Broken stitches in heading seam causing an unstitched length of one inch or more	x	-	-
	Broken stitches in heading seam causing an unstitched length of less than 1 inch	-	-	x
	Broken stitches in any other seam causing an unstitched length of less than 1/2 inch	-	-	x
Embroidery Design (emblem, stars, insignia, lettering, etc.)	Broken stitches	-	*	-
	Not applied as specified	x	-	-
	Design or parts of design reversed or inverted	x	-	-
	Design misplaced or in wrong location	-	*	-
	Lettering does not read from right-to-left on both sides (unless otherwise specified)	x	-	-
	Design not oriented on each side as specified	x	-	-
	Pattern marks used for location of design visible on finished product	-	*	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	*	Minor
	Pattern marks used for location of design visible on finished product....	-	*	-
	Design or insignia not neatly trimmed...	-	*	-
	Evidence that sizing or stiffening agent used as an aid in sewing has deleterious effect.....	-	*	-
Hems	Nylon or acrylic flags not hemmed on all edges.....	x	-	-
	Hem uneven.....	-	*	-
	Hem on wrong side of flag.....	-	-	x
Reinforcement patches	Positioned on face side of flag.....	-	-	x
	Portion of patch at heading not inserted within the headings as specified.....	-	-	x
	Patch not the same material or color as section reinforced.....	-	*	-
	Size or shape of patch not as specified.	-	*	-
Fringe	Not completely attached as specified....	x	-	-
	Ends of fringe not caught in heading stitching.....	-	-	x
	Not one continuous length.....	-	-	x
	Not stitched to the front side of flag..	-	-	x
	Not evenly attached around the flag.....	-	-	x
	Stitching of fringe not through center portion of the fringe heading.....	-	*	-
	One half of fringe not visible on reverse side of flag.....	-	*	-
Heading (type I, class 1 or class 1A), or class 3, as applicable	Lower end of line not passed through snap hook and sewed to itself.....	x	-	-
	Length of zigzag stitching not as specified.....	-	-	x
	Zigzag stitching not sewn completely through all thicknesses of heading and line at any of the required locations.	-	*	-
	Lower edge of ring more than 1/2 inch above or withing the upper end of heading.....	-	-	x
	Ends of heading not closed by two rows of stitching up to distance line.....	-	*	-
	Free end of distance line not whipped, fused or taped as specified.....	-	*	-
	Sides and ends of duck headings out of alignment.....	-	*	-
Heading (type I, class 2)	Grommet clinched excessively tight, cutting fabric.....	x	-	-
	Grommet improperly set, e.g., clinched too loosely allowing grommet to rotate.....	-	-	x

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	*	Minor
	Sides and ends of duck out of alignment.	-	*	-
Heading (type I, class 4)	Grommets clinched excessively tight cutting fabric.....	x	-	-
	Grommets improperly located.....	-	*	-
	Sides and ends of duck heading not properly aligned.....	-	*	-
	Grommet improperly set, e.g., clinched too loosely allowing grommet to rotate.....	-	-	x
	Leather tab not positioned and attached as shown on drawing.....	-	-	x
Heading (type II)	Sheeting all or partially missing.....	x	-	-
	Heading improperly formed, e.g., both edges of the sheeting or hoist end of flag not caught entire length by heading seam.....	-	-	x
	Leather tabs not positioned and attached as shown on drawing.....	-	-	x
	Heading seam not formed on back of flag.	-	-	x
Heading (type III, class 1)	Tie tape missing.....	x	-	-
	Tie tape not positioned or attached as specified.....	-	-	x
Heading (type III, class 2)	Hemmed heading not as shown on drawing..	-	*	-
	Leather tab not positioned and attached as shown on the drawing.....	-	*	-
Marking	Missing, incorrect, illegible, text incomplete, marking in wrong location, size of lettering not as specified or color or marking not as specified.....	-	-	x
Label	Text incomplete or incorrect, not attached as specified, not in location specified or not in position specified.	-	-	x

4.3.3.1.2 Examination of flag or pennant for defects in dimensions.--

Examine	Defect	Classification Major	Minor
Overall length (minus heading); overall width of basic flag or pennant	Not within the specified tolerance (plus or minus 5 percent or plus or minus 5/8 inch per foot).....	x	-
Width of heading	Varies from specified finished width by:		
	-1/2 inch or more from specified width..	x	-
	-more than 1/4 inch but less than 1/2 inch of the specified width.....	-	x

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major *	Minor
Design (emblems, stars, insignia, lettering, etc.)	Dimensions of design or any part thereof out of balance or not in symmetrical alignment (check by comparing with approval sample or drawing):		
	-seriously affecting serviceability or appearance.....	x	-
	-affecting serviceability or appearance but not seriously.....	-	x

4.3.3.1.3 Inspection levels and acceptable quality levels (AQL's except for flag blanks (when applicable)).--The inspection levels and the AQL's expressed in defect per hundred units shall be as follows:

	Inspection level	AQL Major	AQL Total
For defects applicable to 4.3.3.1.1	I	4.0	10.0
For defects applicable to 4.3.3.1.2	S-3	6.5	15.0

4.3.3.1.3.1 Flag blanks (when applicable).--One hundred percent inspection shall be performed on the end item flag blank.

4.3.4 Examination of count of flags and pennants in intermediate containers.--Flags and pennants packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of flags and pennants shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

4.3.5 Examination of preparation for delivery requirements.--An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

Examine	Defects
Materials	Any component missing Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate strapping. Bulging or distortion of containers.
Weight	Net weight exceeds requirements.

5. PACKAGING

5.1 Preservation and packaging.--Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.--Flags and pennants made of nylon-wool shall be thoroughly dusted over the entire area with flake naphthalene, before being packaged (see 6.3). Flags requiring distance lines shall have the exposed portion of all attached hardware wrapped or covered in polythylene film 0.002 inch thick (minimum).

5.1.1.2 Unit packaging.--

5.1.1.2.1 Flags and pennants of nylon, nylon-wool, acrylic and cotton bunting.--Each flag or pennant, preserved as specified in 5.1.1, shall be compactly folded or folded and rolled and then placed in a snug-fitting transparent, end-opening, polyethylene bag. The polyethylene film shall be 0.003 inch thick. All seams and closures shall be made by heat sealing. Prior to or during the heat sealing operation, excess air within the bag shall be expelled. Closure shall be in accordance with the appendix of the applicable specification.

5.1.1.2.2 Flags and pennants of rayon banner cloth.--Each flag or pennant shall be laid out flat on two thicknesses of tissue paper conforming to type I, grade A, class 1 of UU-P-553. Tissue paper shall overlap all edges of flag or pennant a minimum of two inches. Each flag or pennant combined with overlapping tissue paper, shall be rolled open width on a chipboard tube. The tissue paper overlapping the tube ends shall be tucked inside the tube ends. Each flag or pennant shall be tightly wrapped with 50-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The closure shall be sealed with 2-inch minimum width gummed paper tape. Each wrapped flag or pennant shall then be individually packaged in a snug fitting box conforming to PPP-B-636, class domestic, style optional. Closure shall be in accordance with the appendix of the box specification.

5.1.1.3 Intermediate packaging.--Unless otherwise specified, flags or pennants of one material, type, style and class only, unit packaged as specified in 5.1.1.2, shall be neatly stacked and packaged in multiples of 12 within a snug-fitting intermediate fiberboard container conforming to class domestic grade 275 of PPP-B-636. The net weight of contents in each container shall not exceed 65 pounds. Closure shall be in accordance with the appendix of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

5.1.2 Level C.--Assembled flags shall be preserved and packaged in a manner which will afford adequate protection against corrosion, deterioration and physical damaged during shipment from the supply source to the first receiving activity. The supplier's commercial practice will be acceptable when it fulfills the above requirements.

5.2 Packing.--Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A.--Flags and pennants packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to W5c, W5s, V3c or V3s, of PPP-B-636. Closure shall be in accordance with the applicable container specification.

5.2.2 Level B.--Flags and pennants packaged as specified in 5.1.1.3, shall be acceptable as level B pack.

5.2.3 Level C.--Flags packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the rules and regulations applicable to the mode of transportation.

5.3 Marking.--In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.--Polyethylene bagged packages shall have the required information legibly printed or stamped in black on the bag across the center face, or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following:

STOCK NUMBER
NOMENCLATURE
QUANTITY

6. NOTES

6.1 Intended use.--The flags and pennants covered by this specification are intended to be used by individuals and Military organizations for identification or signaling.

6.2 Ordering data.--Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) When a first article is required (see 3.2).

(c) Title of flag or pennant required.

(d) Applicable drawing.

(e) Type of heading required (see 3.5.2, 6.5 and applicable drawing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

(f) When a cord and tassel are required (see 3.3.12 and applicable drawing.)

(g) When a fringe is required (see 3.3.10 and applicable drawing).

(h) Type of distance line required (see 3.3.5 and applicable drawing).

(i) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Napthalene flake requirements.--The napthalene flake requirement (see 5.1.1) is not applicable when Government furnished material of wool or part wool content has been moth treated.

6.4 Screen printing.--With screen printed application, experience has shown that the types of colorants which provide a degree of colorfastness equal to that of the basic shades of the flag or pennant are derived from the following classes: Cellulosic fabrics; vat dyed in all cases except for US Army Scarlet, US Army Maroon and other reds which can be matched only with napthol dyes. Cellulose reactive dyes and resin-bonded pigment systems may be used successfully in lieu of vat dyes and napthol dyes. For nylon and nylon-wool buntings, acid and neutral premetallized types have been used.

6.5 Headings covered by this specification are as shown on the drawings and/or figures below:

Heading	Drawing	Figure
Type I		
Class 1	5-1-45A	Figure 1
Class 1A	5-1-45H	Figure 2
Class 2	5-1-45B	Figure 1
Class 3	5-1-45G	Figure 3
Class 4	5-1-45D	Figure 4
Type II	5-1-45E	Figure 5
Type III		
Class 1	5-1-45F	Figure 6
Class 2	5-1-45F	Figure 6

Custodians:
Army--IH
Navy--NU
Air Force--11
Review Activities:
Navy--NU, MC
Air Force--99
DLA-CT
User Activities:
Air Force--45
Project No. 8345-0124

Preparing Activity:
The Institute of Heraldry,
United States Army

Project No. 8345-0124

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.


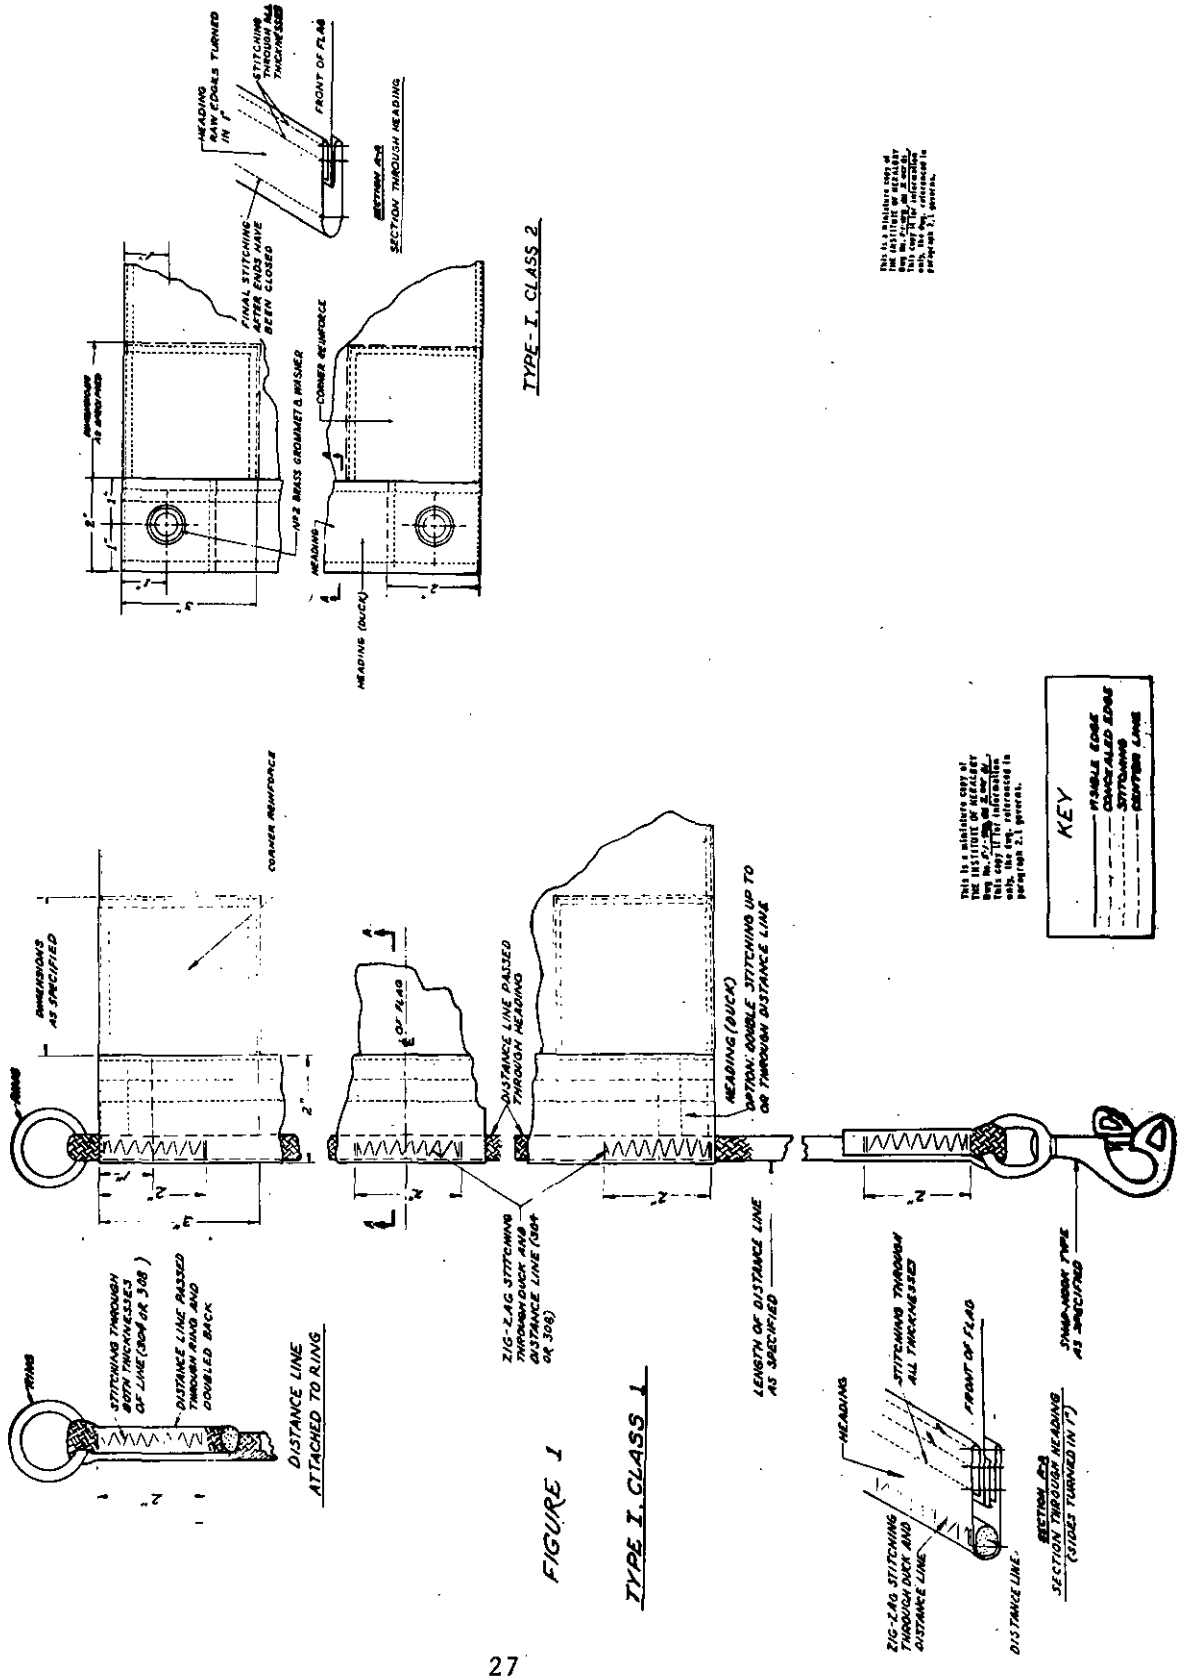



FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

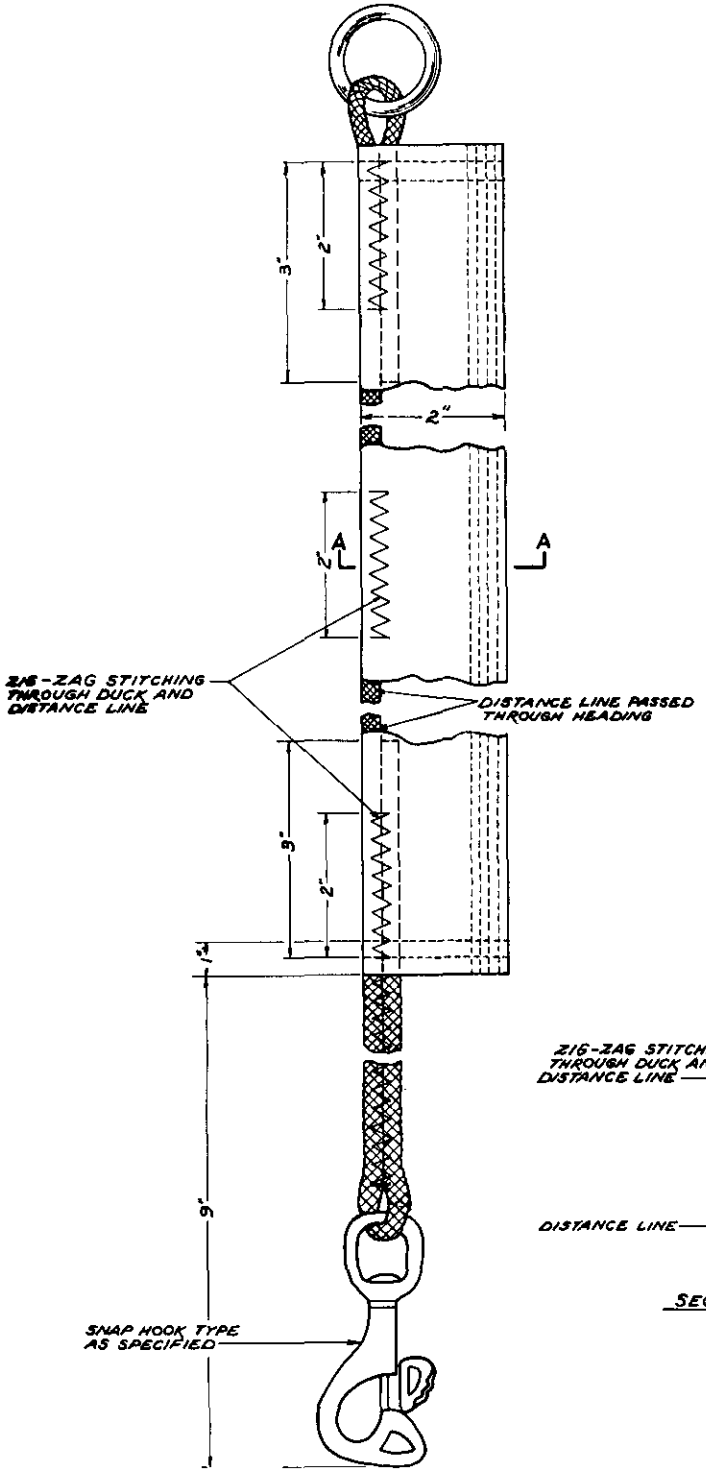

This is a miniature copy of
THE INSTITUTE OF HERALDRY
Dwg. No. 3-1-47A, dtd 11 Aug. 83.
This copy is furnished for information only.
The dwg. referenced in para. 2.1 governs.

TYPE I, CLASS 1A

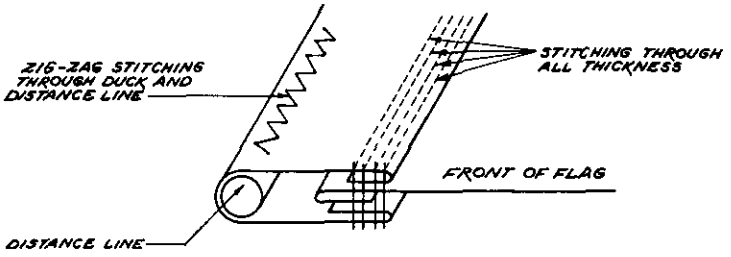



SECTION A-A
SECTION THROUGH HEADING
(SIDES TURNED IN 1")

KEY
VISIBLE EDGE
CONCEALED EDGE
STITCHING


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

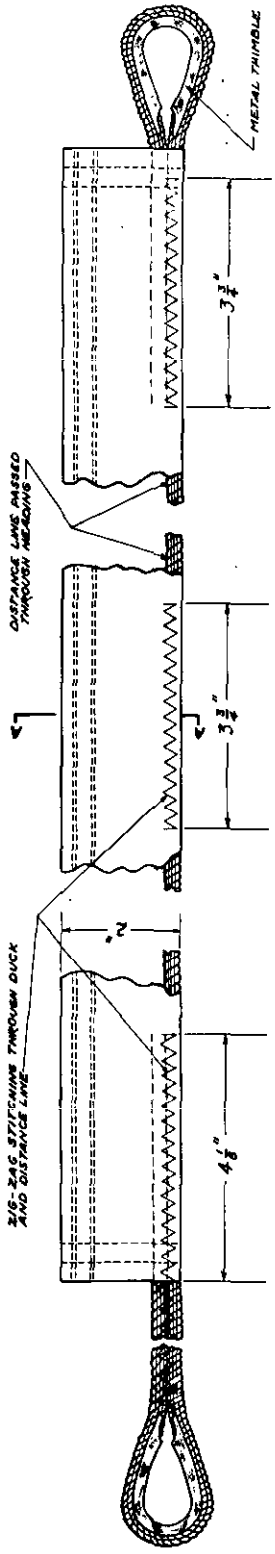

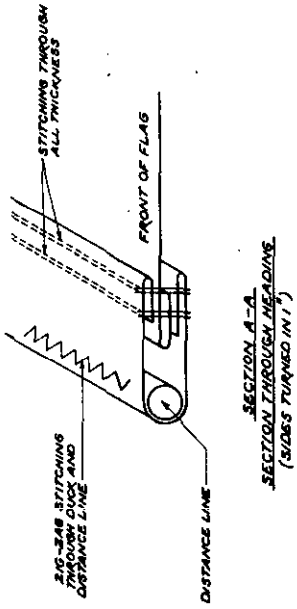

SECTION A-A
SECTION THROUGH HEADING
(SIDES TURNED IN 1")



This is a miniature copy of THE INSTITUTE OF HERALDRY Dwg No. 5-2-576 dtd 2 Oct 81. This copy is for information only, the dwg. referenced in paragraph 2.1 governs.

TYPE I, CLASS 3

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

This is a miniature copy of
THE INSTITUTE OF NEAL
Any No. 5/...
This copy is for inter
only, the dat. referenced in
paragraph 2.1 governs.

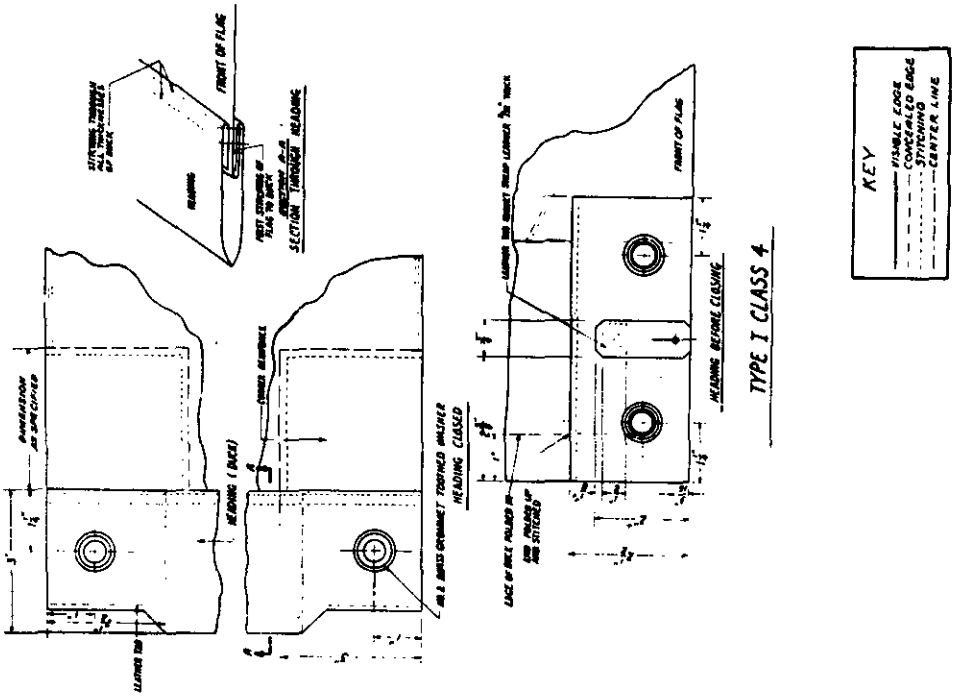


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

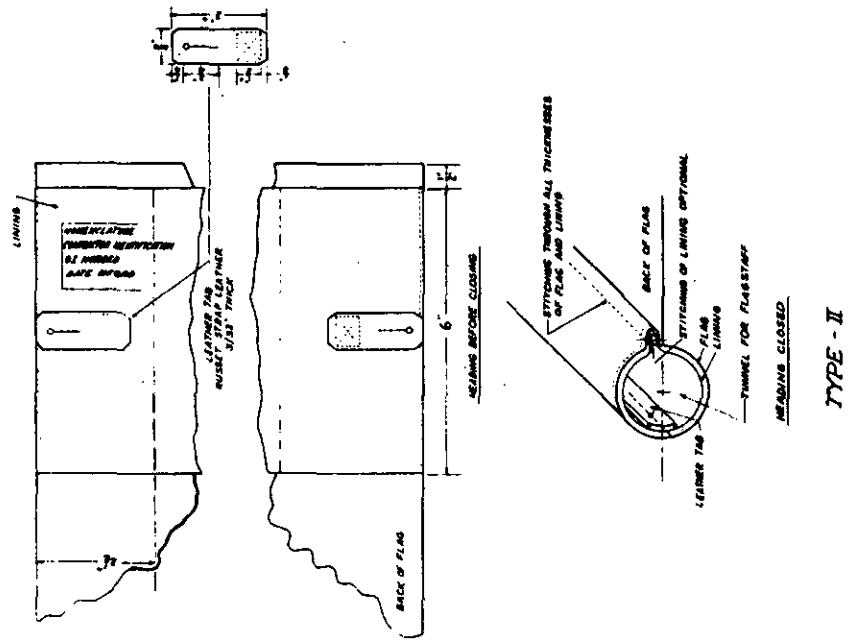


FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

This is a miniature copy of
the INSTITUTE OF METALLURGY
Drawing No. S/C-6812
condition sizes 33 June 70
this copy is for INFORMATION only.
the dog references to para 2.1
governs.


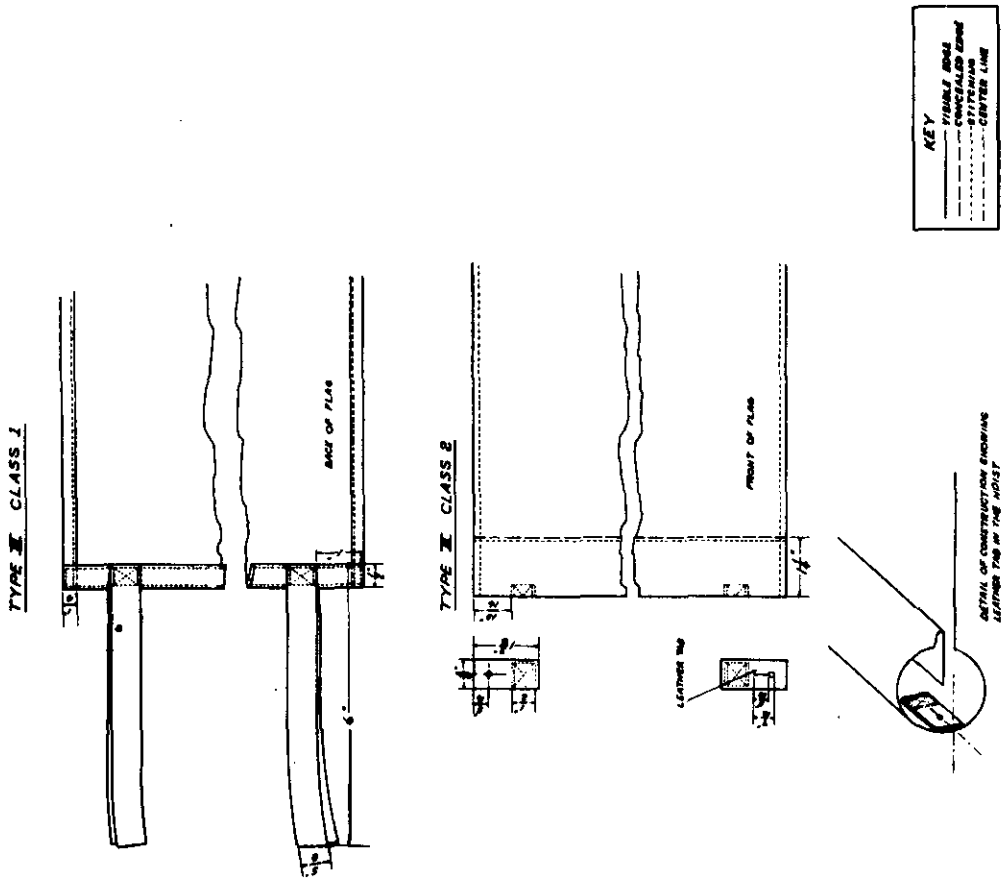


FIGURE 6


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

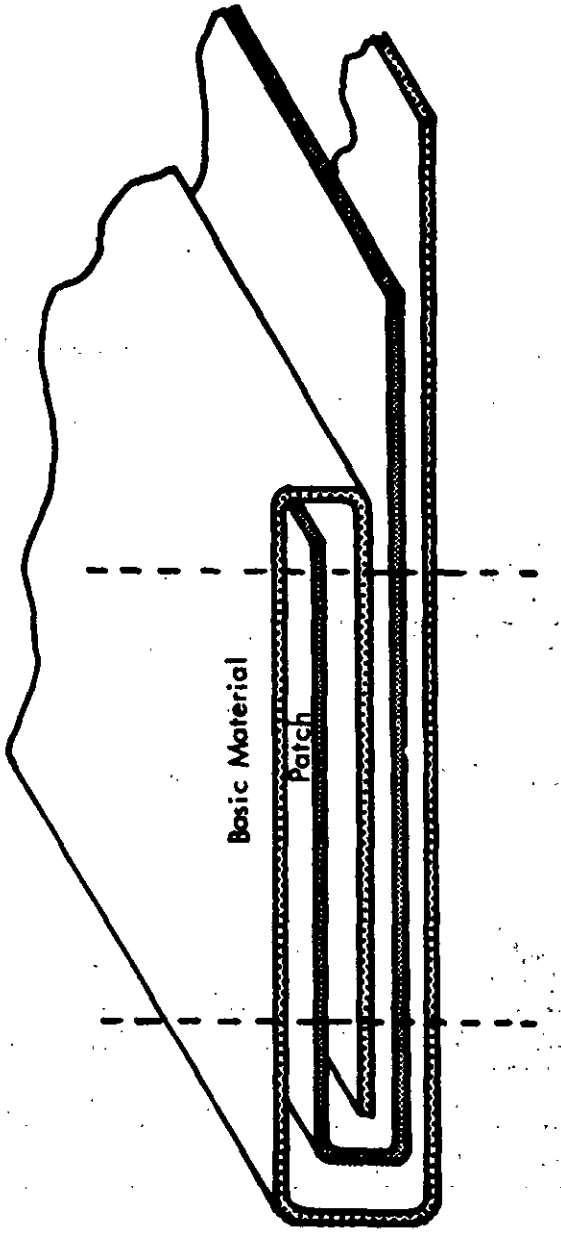

SEWING OF REINFORCEMENT PATCHES TO THE FLY CORNERS OF FLAG

FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

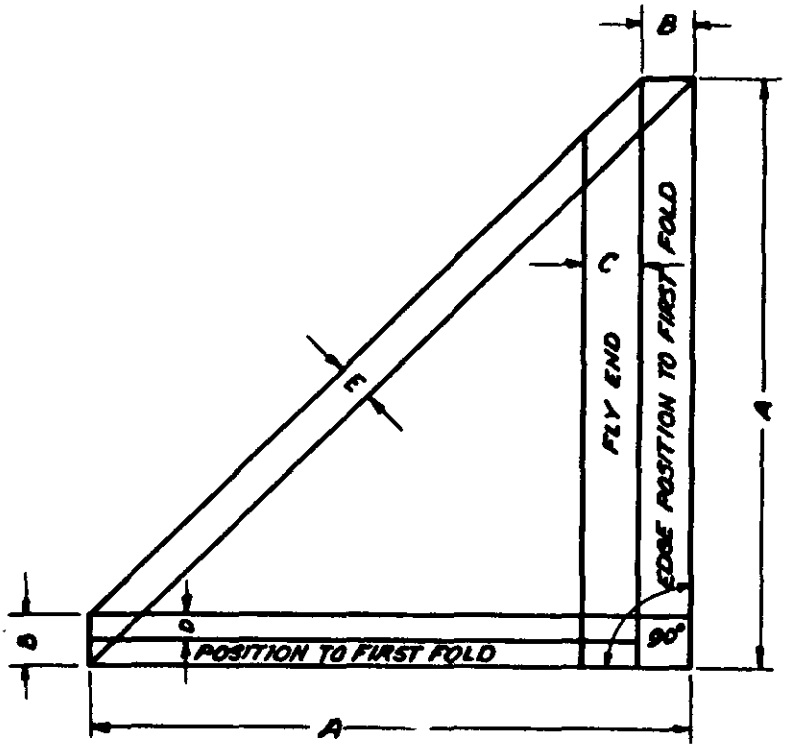

REINFORCEMENT PATCH

FLAG SIZE	DIMENSIONS IN INCHES				
	A	B	C	D	E
3½	10¼	¾	¾	⅜	½
4	9¼	¾	¾	⅜	½
6	8¼	¾	¾	⅜	½

FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
The Institute of Heraldry, US Army
Cameron Station
Alexandria, VA 22314

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Director
The Institute of Heraldry, US Army
ATTN: DAAG-HDT
5010 Duke Street
Alexandria, VA 22314

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-2692F	Flags and Pennants

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:16Z
Check the source to verify that this is the current version before use.