INCH-POUND

MIL-DTL-2726/8B
14 February 2006
SUPERSEDING
MIL-R-2726/8A(SH)
3 July 1986


DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, 3-PIN GROUNDED, 50-AMPERE, 250-VOLT, DIRECT CURRENT (SYMBOL NOS. 757.1 AND 757.2)

Inactive for new design as of 28 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.

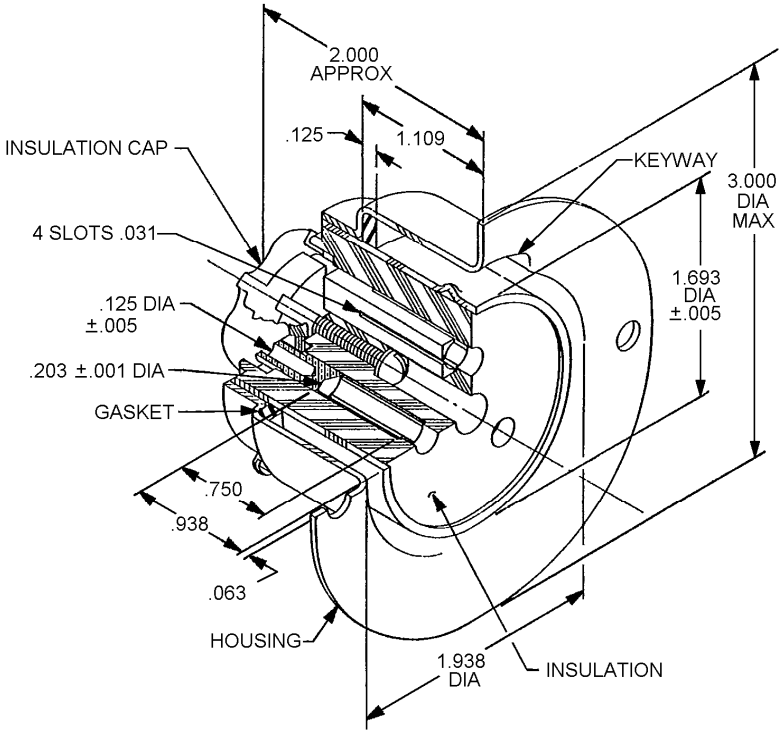


SH 9079 symbol no. 757.1

FIGURE 1. Receptacle (metal housing and shell).

AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:21Z
Check the source to verify that this is the current version before use.

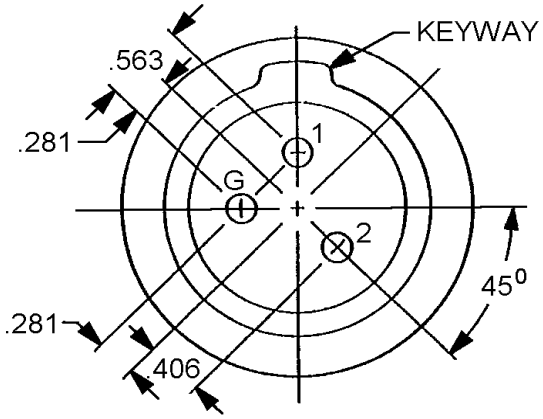

Inches	mm
.001	0.02
.005	0.13
.016	0.41
.031	0.79
.062	1.57
.125	3.17
.203	5.16
.281	7.14
.406	10.31
.562	14.27
.750	19.05
.938	23.82
1.109	28.17
1.693	43.00
1.938	49.22
2.000	50.80
3.000	76.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .015 (0.38mm) and ± .5° on angles.
4. Supersedes: Drawing 9000-S6202-73882, pc 8, symbol 757.
5. Part or Identifying Number (PIN): M2726/8-001.

FIGURE 1. Receptacle (metal housing and shell) – Continued.

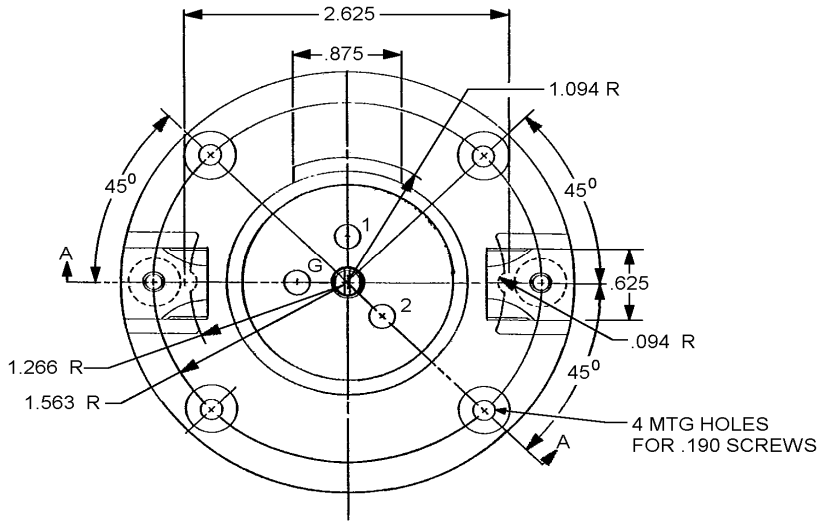


SH 9080 symbol no. 757.2

Inches	mm
.005	0.13
.016	0.41
.078	1.98
.094	2.39
.125	3.17
.141	3.58
.188	4.77
.190	4.83
.375	9.52
.625	15.88
.688	17.47
.875	24.76
1.094	27.79
1.266	32.16
1.562	39.67
1.691	42.95
1.695	43.05
1.927	48.95
1.947	49.45
2.625	66.67
3.625	90.07

FIGURE 2. Receptacle (plastic body).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:21Z
Check the source to verify that this is the current version before use.

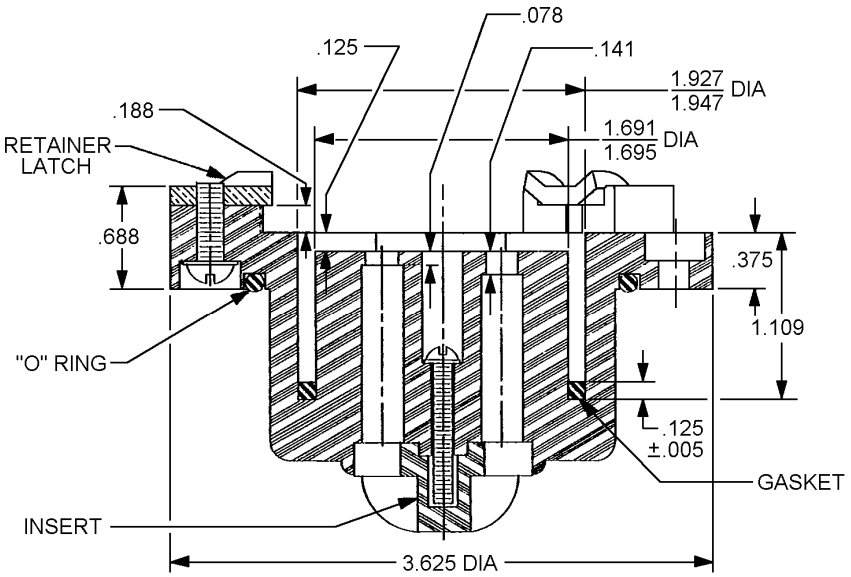

SECTION A - A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .015 (0.38mm) and ± .5° degree on angles.
4. PIN: M2726/8-002.

FIGURE 2. Receptacle (plastic body).

REQUIREMENTS

Dimensions and configurations: See figures 1 and 2.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108 when mounted in a suitable enclosure.

Material: Housing optional polyamide (nylon) or metal. Receptacle insulation and cap in accordance with ASTM-D5948 type MAI-60. Contacts in accordance with ASTM-B441copper alloy number 175, HT temper.

Contact hardness: Minimum of Rockwell 80F.

Mating plug: MIL-DTL-2726/2, PIN M2726/2-001.

Cap assembly: MIL-DTL-2726/13, PIN M2726/13-001.

Design: Plastic housing and insulation may be a one piece molded unit.

Gasket: Neoprene, commercial (COML), durometer number 20. Lubricate with silicon compound.

O-ring: In accordance with SAE-AS28775, PIN 229.

Electrical rating: 50-ampere, 250-volt, direct current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:21Z
Check the source to verify that this is the current version before use.

PIN: M2726/8-001 (metal housing and shell), M2726/8-002 (plastic body).

Verification

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and quality conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Contact resistance	X	X
Endurance	X	
Salt spray	X	
Contact resistance	X	
Current load	X	
Vibration	X	
Shock	X	
Effectiveness of enclosure	X	X
Dielectric withstanding voltage	X	
Mechanical abuse	X	
Ball drop impact	X	
Strain relief	X	
Rockwell hardness	X	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-B441
ASTM-D5948
MIL-DTL-2726/2
MIL-DTL-2726/13
MIL-STD-108
SAE-AS28775

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:21Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-4617-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:21Z
Check the source to verify that this is the current version before use.